
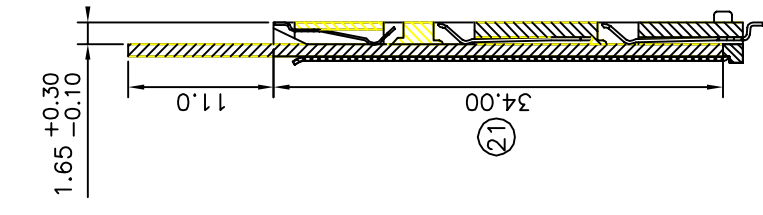
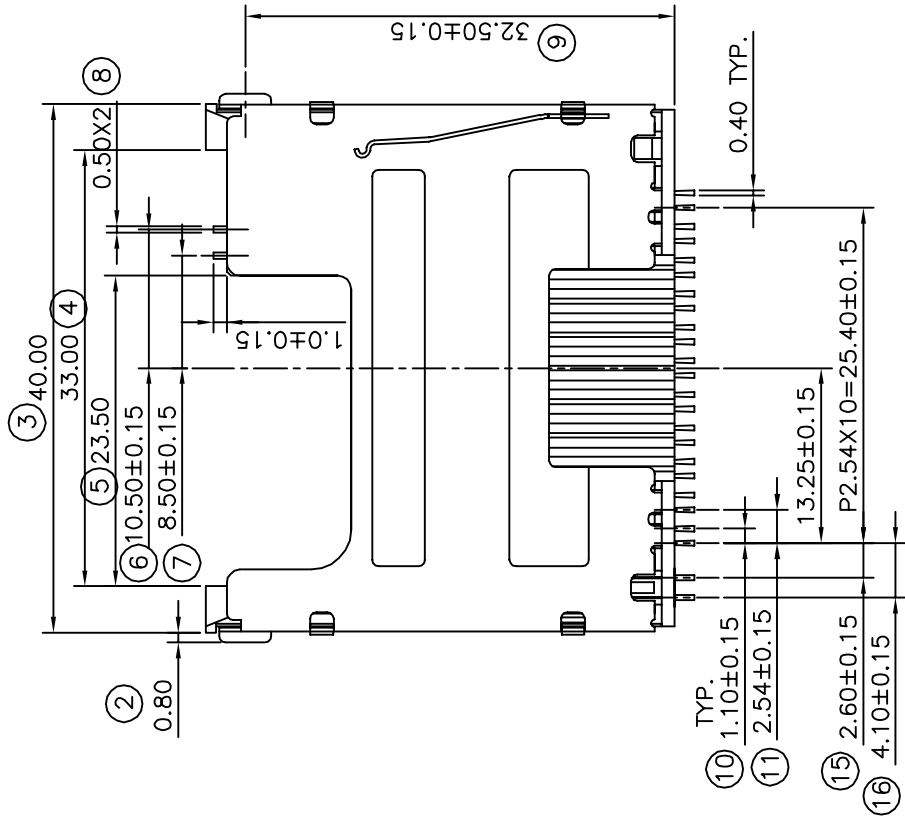


REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

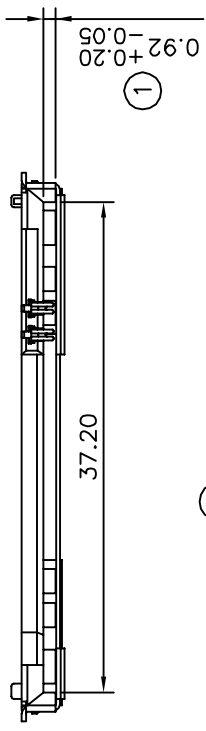

- SPECIFICATION**
- MATERIAL&PLATING [UL 94V-0]**
 - Insulator: Nylon
 - Contact: Phosphor bronze
Duplex Plating: 15u" Gold on contact ares, 100u" Tin/Lead on solder tails.
 - Bar & Cover: Brass
 - STANDARD DATA**
 - Card Voltage: 3.3 or 5.0V
 - Current rating: 0.5A
 - Operating temperature: -20°C ~ +60°C
 - ELECTRICAL**
 - Contact resistance: 100 milliohms max.
 - Insulator resistance: 1000 Megohms min.
 - Dielectric withstanding: 200VAC

成品規格圖

TITLE	SMC CONNECTOR	APP.		ANGLES	±3°	SIZE	A4
PART NO	25J03-2600	CHK.		LINEAR	0.0 ±0.38	SCALE	1:1
DRW NO	250012	DR.	王慧芬		0.00±0.25	SHEET	1/1
UNIT	mm(INCH)	PROJECT	◎				



91.03.25

