

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Current Rating:
0.75 Amp

Insulator resistance:
1000 Megohms Min.

Contact resistance:
20 m ohms Max.

Dielectric withstanding:
AC 250V/minute

Operating Temperature:
-40° ~ +105°C

Contact Material:
Phosphor Bronze

Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0

Color: Black

Finish:
Gold, Tin or Duplex plated

Standard: Gold flash all over
Duplex plated:
Gold plated on contact area
Tin on solder area

RoHS Compliance

RECOMMENDED P. C. B. LAYOUT

Ordering information:

22P8832-XXMXXX-XXX-X

Number of Contact
04~100




10 W/O Locating peg
OP with Locating peg

Color

L LCP

G Gold Plated
T Tin Plated
H Duplex plated

Contact Plating
01 Normal
10 10µ"

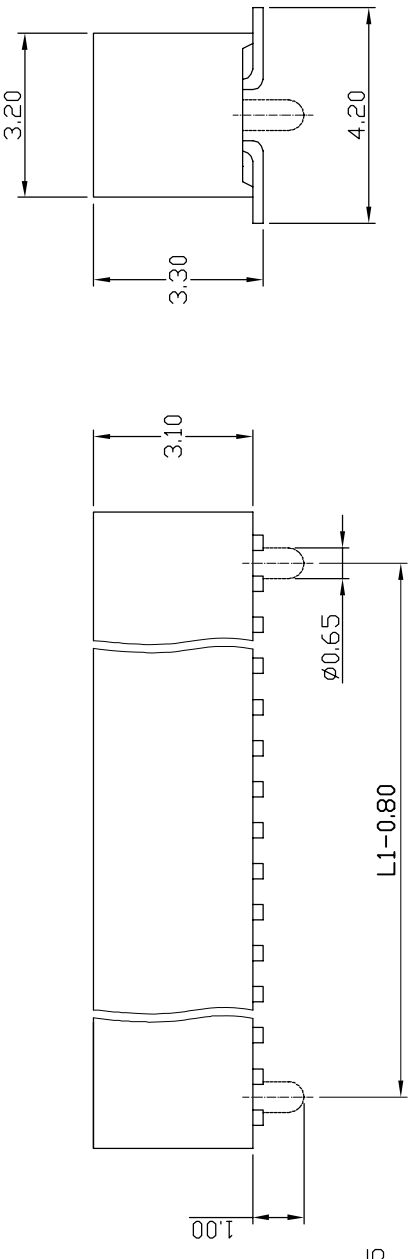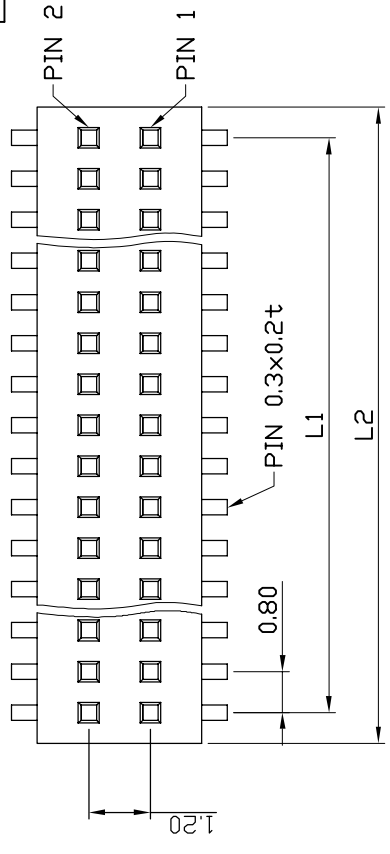

THREE SIDE CONTACT TERMINAL

Ref.

成品規格圖		APP.	ANGLES	±3°	SIZE	A4
TITLE	0.8mm Female Header SMT Type	CHK.	LINEAR	0.0 ±0.38	SCALE	3:1
PART NO	22P8832-XXMXXX-XXX-X			0.00±0.25	SHEET	1/1
DRW NO		DR.	KEN			
UNIT	mm(INCH)	PROJECT	◎			
						96.01.04

