REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

Ordering information:

22P8122-XXM0PX-XXX-X-C

- Number of Contact: 08~100
- Color
- Contact Plating: 01 Normal; 10 10μ"
- G Gold Plated; T Tin Plated; H Duplex plated
- L LCP
- CAP

SPECIFICATIONS

Current Rating:
1 Amp
Insulator resistance:
1000 Megohms Min.
Contact resistance:
20 m ohms Max.
Dielectric withstanding:
AC 500V/minute
Operating Temperature:
-40° ~ +105°C
Contact Material:
Phosphor Bronze
Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0
Color: Black
Finish:
Gold, Tin or Duplex plated
Standard: Gold flash all over
Duplex plated:
Gold plated on contact area
Tin on solder area

RoHS Compliance

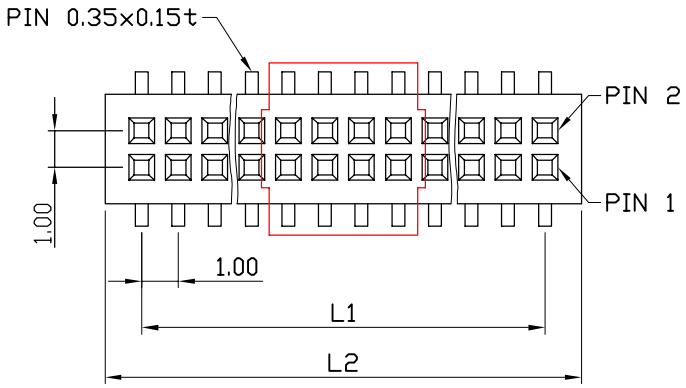

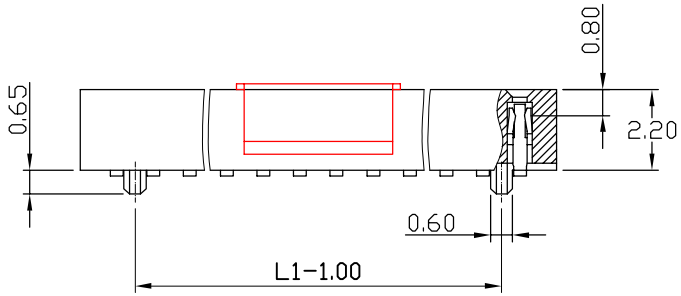

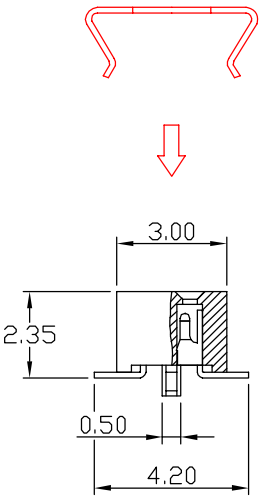

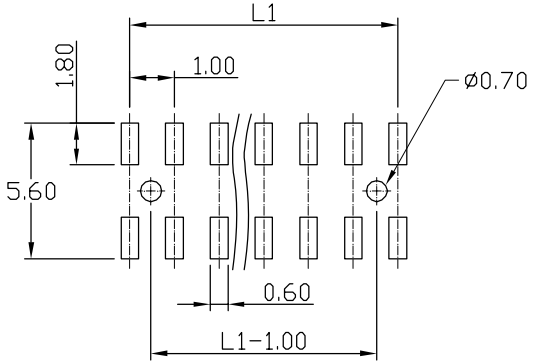

RECOMMENDED P.C.B. LAYOUT



THREE SIDE CONTACT TERMINAL

Cir-cuits	Dimension mm L1	L2
2x4	3.00	5.00
2x5	4.00	6.00
2x6	5.00	7.00
2x7	6.00	8.00
2x8	7.00	9.00
2x9	8.00	10.00
2x10	9.00	11.00
2x11	10.00	12.00
2x12	11.00	13.00
2x13	12.00	14.00
2x14	13.00	15.00
2x15	14.00	16.00
2x16	15.00	17.00
2x17	16.00	18.00
2x18	17.00	19.00
2x19	18.00	20.00
2x20	19.00	21.00
2x21	20.00	22.00
2x22	21.00	23.00
2x23	22.00	24.00
2x24	23.00	25.00
2x25	24.00	26.00
2x26	25.00	27.00
2x27	26.00	28.00
2x28	27.00	29.00
2x29	28.00	30.00
2x30	29.00	31.00
2x31	30.00	32.00
2x32	31.00	33.00
2x33	32.00	34.00
2x34	33.00	35.00
2x35	34.00	36.00
2x36	35.00	37.00
2x37	36.00	38.00
2x38	37.00	39.00
2x39	38.00	40.00
2x40	39.00	41.00
2x41	40.00	42.00
2x42	41.00	43.00
2x43	42.00	44.00
2x44	43.00	45.00
2x45	44.00	46.00
2x46	45.00	47.00
2x47	46.00	48.00
2x48	47.00	49.00
2x49	48.00	50.00
2x50	49.00	51.00

Ref.

成品規格圖		APP.		ANGLES	±3°	SIZE	A4
				LINEAR	0.0 ±0.38	SCALE	3:1
TITLE	1.00mm Female Header SMT Type	CHK.			0.00±0.25	SHEET	1/1
PART NO	22P8122-XXM0PX-XXX-X-C			JVE GLOBAL			
DRW NO		DR.	KEN				
UNIT	mm(INCH)	PROJECT			96.01.04		