

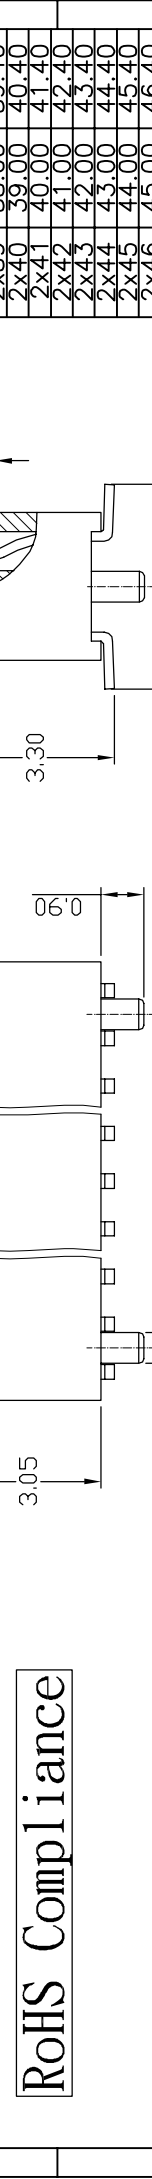
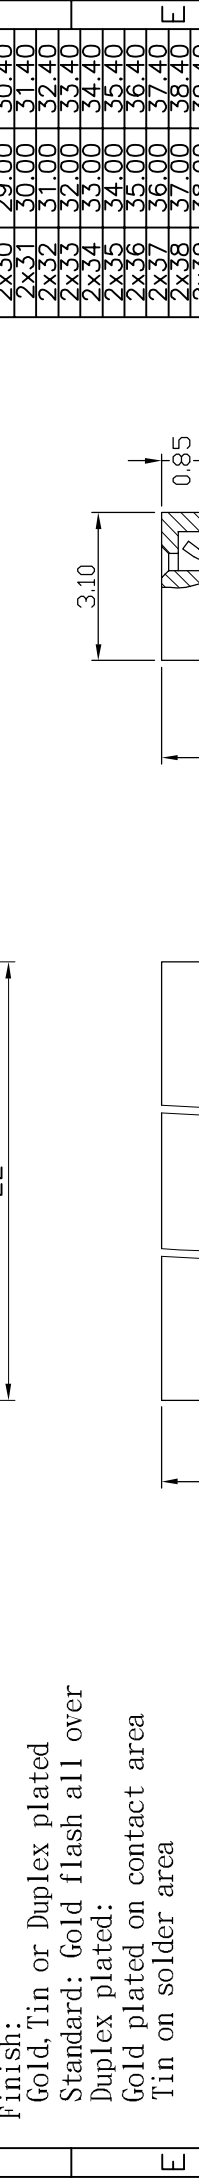


REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS
 Current Rating: 1 Amp
 Insulator resistance: 1000 Megohms Min.
 Contact resistance: 20 m ohms Max.
 Dielectric withstanding: AC 500V/minute
 Operating Temperature: -40° ~ +105°C
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic +Glass Fibre UL94V-0
 Color: Black
 Finish: Gold, Tin or Duplex plated
 Standard: Gold flash all over
 Duplex plated:
 Gold plated on contact area
 Tin on solder area

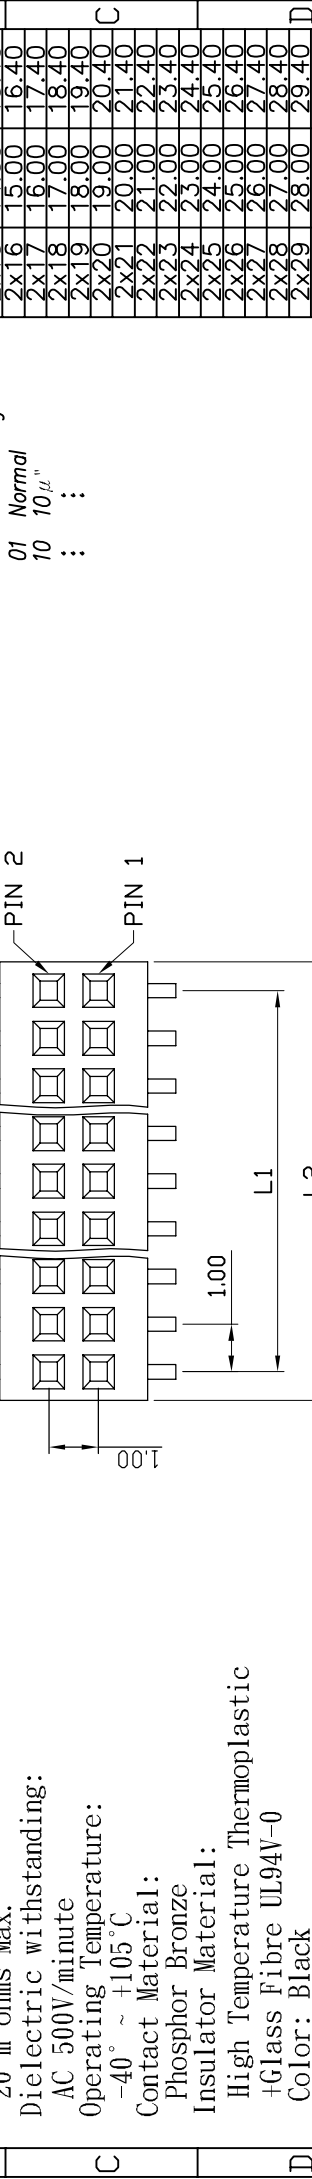

RoHS Compliance

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

Ordering information:
 22P8132-XXM0PX-XXX-L

Color

Number of Contact 04~100

L LCP
 G Gold Plated
 T Tin Plated
 H Duplex plated

Contact Plating
 01 Normal
 10 10µ
 ...

PIN 2
 PIN 1

PIN 0.30x0.20t

1.00

1.00

L1

L2

3.05

06.0

L1-1.00

0.65

3.10

0.85

4.30

L1

1.00

5.30

0.74

1.85

0.61

L1-1.00

RoHS Compliance

RECOMMENDED P. C. B. LAYOUT

NOBBUT SIDE CONTACT TERMINAL

成品規格圖

APP.

CHK.

DR.

UNIT

mm(INCH)

PROJECT

96.01.04

KEN

ANGLES ±3°

LINEAR

SCALE 3:1


SIZE A4

SHEET 1/1

JVEGLOBAL

Ref.

RECOMMENDED P. C. B. LAYOUT



NOBBUT SIDE CONTACT TERMINAL