

1	2	3	4	5	6	7	8
REV. DESCRIPTION	DRW. CHK.	APP. DATE					
A	RELEASE						

Ordering information:
22P8742-XXC10X-XXX




Number of Contact
 06~A0(100)

Color

G Gold Plated
 T Tin Plated
 H Duplex plated

Contact Plating
 01 Normal
 10 10μ"

SPECIFICATIONS
 Current Rating:
 1 Amp
 Insulator resistance:
 1000 Megohms Min.
 Contact resistance:
 20 m ohms Max.
 Dielectric withstanding:
 AC 500V/minute
 Operating Temperature:
 -40° ~ +105°C
 Contact Material:
 Phosphor Bronze
 Insulator Material:
 Nylon-6T UL94V-0
 Color: Black
 Finish:
 Gold, Tin or Duplex plated
 Standard: Gold flash all over
 Duplex plated:
 Gold plated on contact area
 Tin on solder area

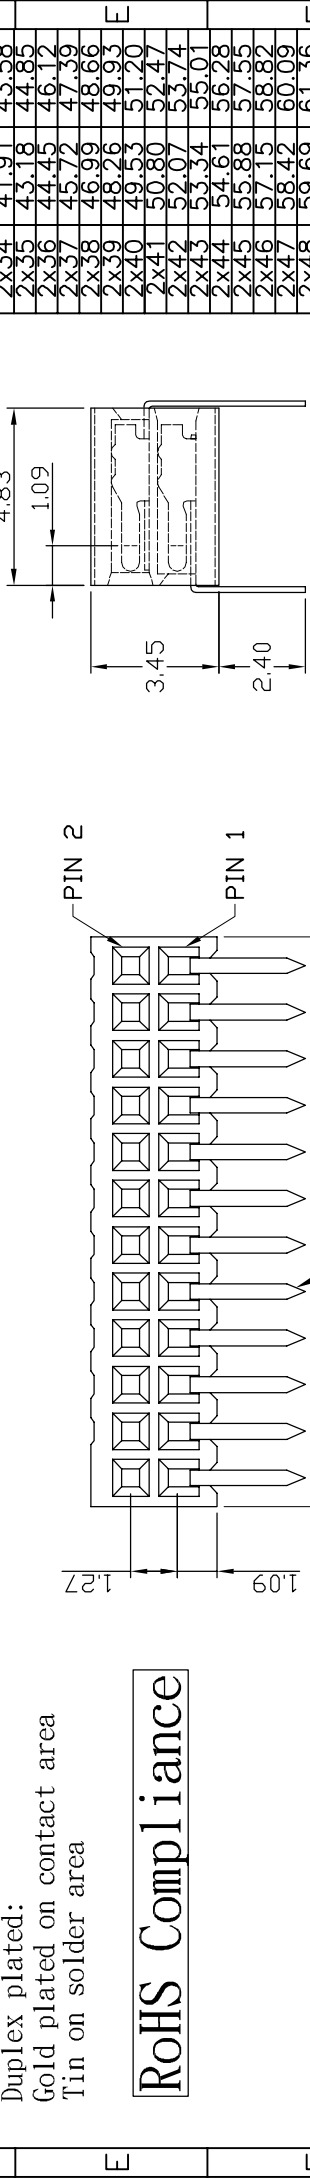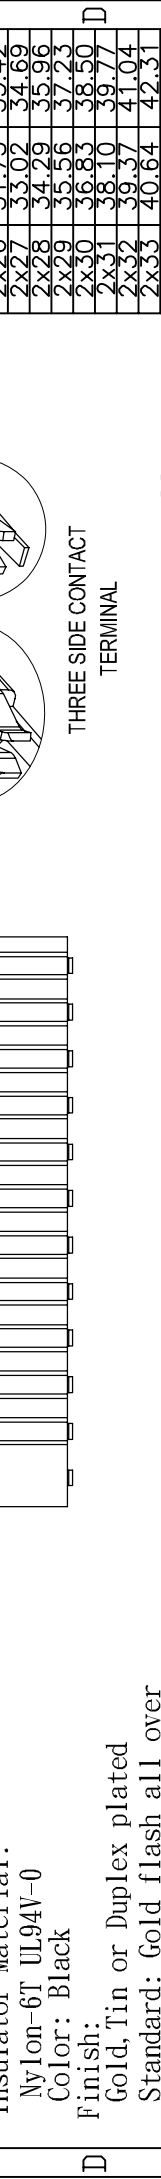

RoHS Compliance

成品規格圖 TITLE 1.27mm Female Header Side Entry Type PART NO 22P8742-XXC10X-XXX DRW NO UNIT mm(INCH) PROJECT		APP. CHK. DR. KEN	ANGLES LINEAR	±3° 0.0 ±0.38 0.00±0.25	SIZE SCALE SHEET	A4 3:1 1/1	
						Ref.	
RECOMMENDED P. C. B. LAYOUT						96.01.04	8