REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

Ordering information:

22P8722-XXMOPX-XXX-X-A

- Number of Contact: 04~A0(100)
- Color
- Contact Plating: 01 Normal; 10 10μ"
- G Gold Plated; T Tin Plated; H Duplex plated
- L LCP

SPECIFICATIONS

Current Rating:
1 Amp
Insulator resistance:
1000 Megohms Min.
Contact resistance:
20 m ohms Max.
Dielectric withstanding:
AC 500V/minute
Operating Temperature:
-40° ~ +105°C
Contact Material:
Phosphor Bronze
Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0
Color: Black
Finish:
Gold, Tin or Duplex plated
Standard: Gold flash all over
Duplex plated:
Gold plated on contact area
Tin on solder area

RoHS Compliance

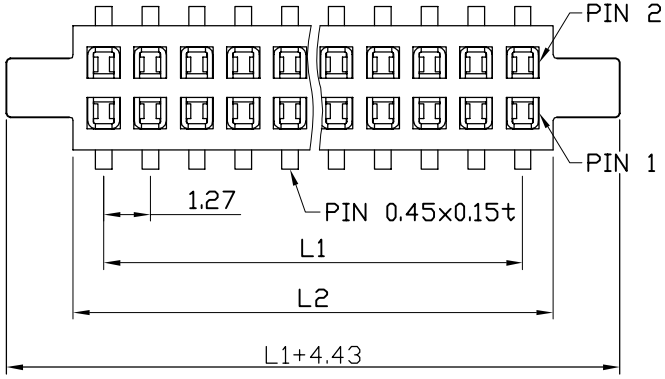



THREE SIDE CONTACT TERMINAL

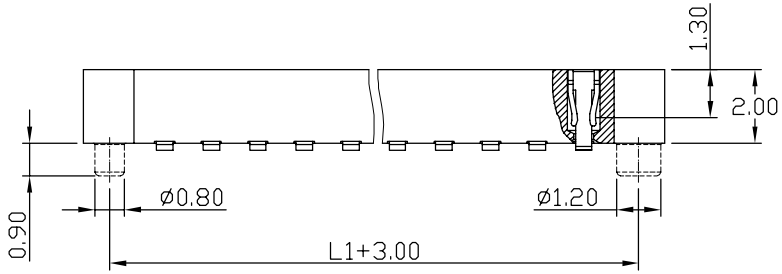



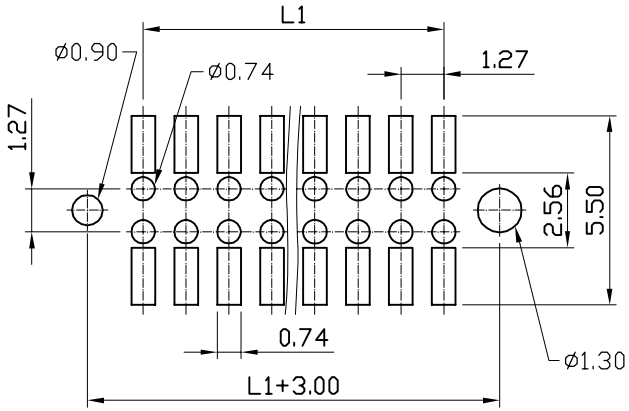

RECOMMENDED P.C.B. LAYOUT

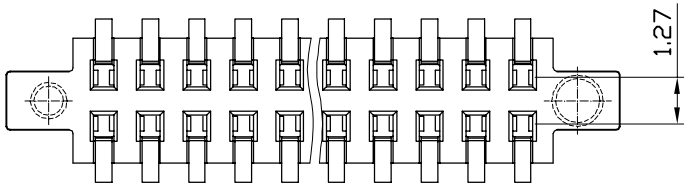

No. of Contacts	DIMENSIONS L1	L2
04	1.27	2.94
06	2.54	4.21
08	3.81	5.48
10	5.08	6.75
12	6.35	8.02
14	7.62	9.29
16	8.89	10.56
18	10.16	11.83
20	11.43	13.10
22	12.70	14.37
24	13.97	15.64
26	15.24	16.91
28	16.51	18.18
30	17.78	19.45
32	19.05	20.72
34	20.32	21.99
36	21.59	23.26
38	22.86	24.53
40	24.13	25.80
42	25.40	27.07
44	26.67	28.34
46	27.94	29.61
48	29.21	30.88
50	30.48	32.15
52	31.75	33.42
54	33.02	34.69
56	34.29	35.96
58	35.56	37.23
60	36.83	38.50
62	38.10	39.77
64	39.37	41.04
66	40.64	42.31
68	41.91	43.58
70	43.18	44.85
72	44.45	46.12
74	45.72	47.39
76	46.99	48.66
78	48.26	49.93
80	49.53	51.20
82	50.80	52.47
84	52.07	53.74
86	53.34	55.01
88	54.61	56.28
90	55.88	57.55
92	57.15	58.82
94	58.42	60.09
96	59.69	61.36
98	60.96	62.63
100	62.23	63.90

Ref.

成品規格圖		APP.		ANGLES	±3°	SIZE	A4
				LINEAR	0.0 ±0.38	SCALE	3:1
TITLE	1.27mm Female Header SMT Type	CHK.			0.00±0.25	SHEET	1/1
PART NO	22P8722-XXMOPX-XXX-X-A						
DRW NO		DR.	KEN				
UNIT	mm(INCH)	PROJECT			96.01.04		

JVE GLOBAL