
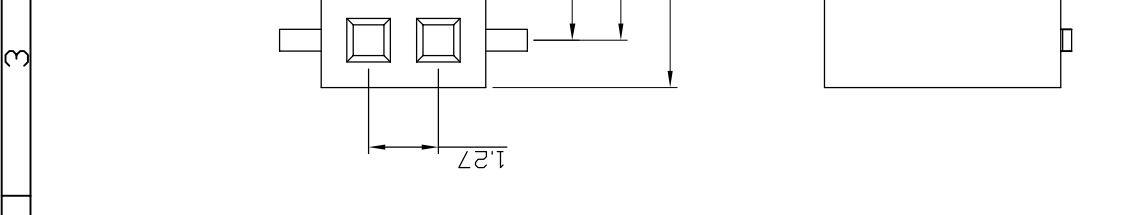
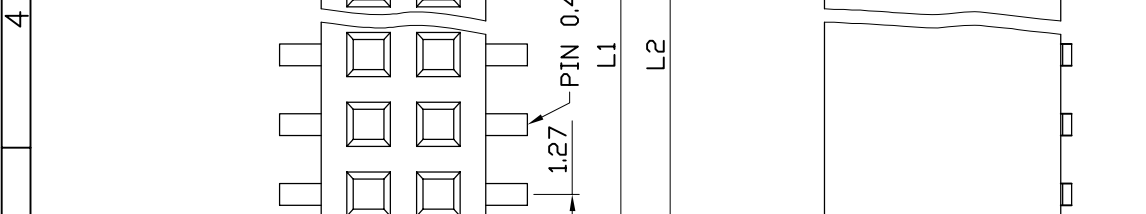
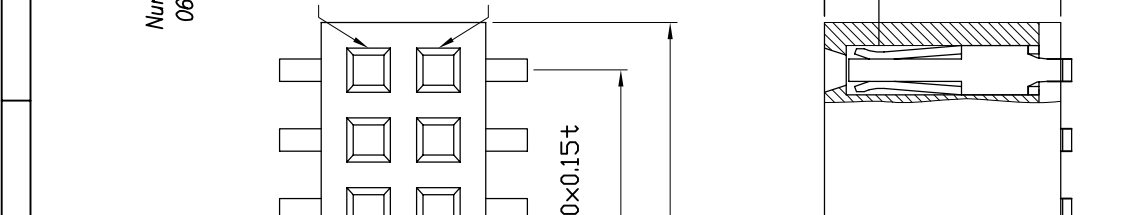
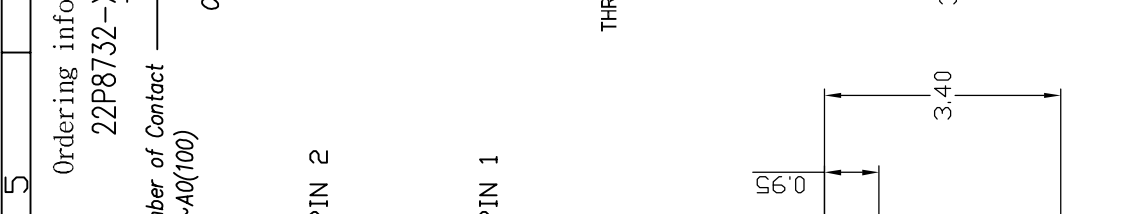


REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

**SPECIFICATIONS**  
 Current Rating: 1 Amp  
 Insulator resistance: 1000 Megohms Min.  
 Contact resistance: 20 m ohms Max.  
 Dielectric withstanding: AC 500V/minute  
 Operating Temperature: -40° ~ +105°C  
 Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature Thermoplastic +Glass Fibre UL94V-0  
 Color: Black  
 Finish: Gold, Tin or Duplex plated  
 Standard: Gold flash all over  
 Duplex plated:  
 Gold plated on contact area  
 Tin on solder area

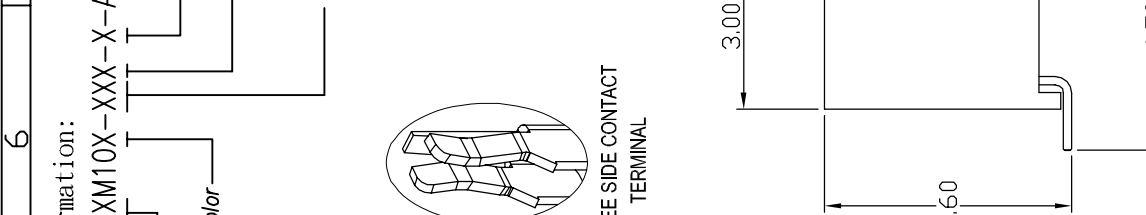

**Ordering information:**  
 22P8732-XXM10X-XXX-X-A  
 Number of Contact 06~A0(100)  
 Color  
 L LCP  
 G Gold Plated  
 T Tin Plated  
 H Duplex plated  
 Contact Plating  
 01 Normal  
 10 10μ"  
 :  
 :

Cir-cuits	Dimension mm
2x3	L1 2.54
2x4	L1 3.81
2x5	L1 5.08
2x6	L1 6.35
2x7	L1 7.62
2x8	L1 8.89
2x9	L1 10.16
2x10	L1 11.43
2x11	L1 12.70
2x12	L1 13.97
2x13	L1 15.24
2x14	L1 16.51
2x15	L1 17.78
2x16	L1 19.05
2x17	L1 20.32
2x18	L1 21.59
2x19	L1 22.86
2x20	L1 24.13
2x21	L1 25.40
2x22	L1 26.67
2x23	L1 27.94
2x24	L1 29.21
2x25	L1 30.48
2x26	L1 31.75
2x27	L1 33.02
2x28	L1 34.29
2x29	L1 35.56
2x30	L1 36.83
2x31	L1 38.10
2x32	L1 39.37
2x33	L1 40.64
2x34	L1 41.91
2x35	L1 43.18
2x36	L1 44.45
2x37	L1 45.72
2x38	L1 46.99
2x39	L1 48.26
2x40	L1 49.53
2x41	L1 50.80
2x42	L1 52.07
2x43	L1 53.34
2x44	L1 54.61
2x45	L1 55.88
2x46	L1 57.15
2x47	L1 58.42
2x48	L1 59.69
2x49	L1 60.96
2x50	L1 62.23

**RoHS Compliance**

**Ref.**

TITLE	1.27mm Female Header SMT Type	CHK.
PART NO	22P8732-XXM10X-XXX-X-A	
DRW NO		
UNIT	mm(INCH)	PROJECT

APP.	ANGLES	±3°	SIZE	A4
	LINEAR	0.0	±0.38	SCALE
		0.00±0.25		SHEET
				1/1

**成品規格圖**

DR. KEN  
 96.01.04

RECOMMENDED P. C. B. LAYOUT

mm(INCH) PROJECT

DR. KEN

96.01.04

8

