

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Current Rating:
1 Amp

Insulator resistance:
1000 Megohms Min.

Contact resistance:
20 m ohms Max.

Dielectric withstanding:
AC 500V/minute

Operating Temperature:
-40° ~ +105°C

Contact Material:
Phosphor Bronze

Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0




Color: Black

Finish:
Gold, Tin or Duplex plated
Standard: Gold flash all over
Duplex plated:
Gold plated on contact area
Tin on solder area



RoHS Compliance

Ordering information:

22P8742-XXM0PX-XXX-X-A

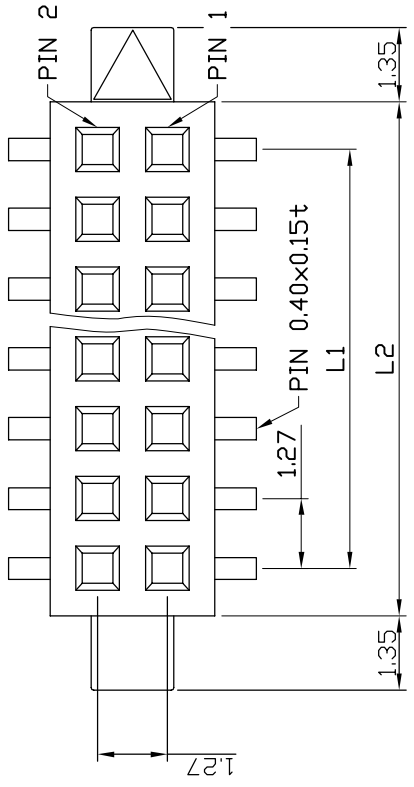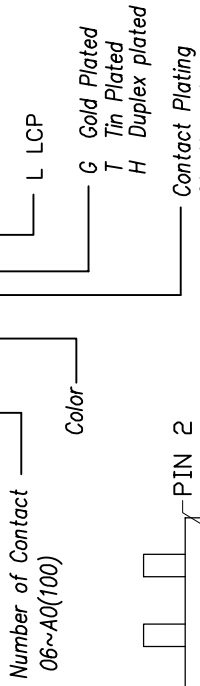

THREE SIDE CONTACT TERMINAL

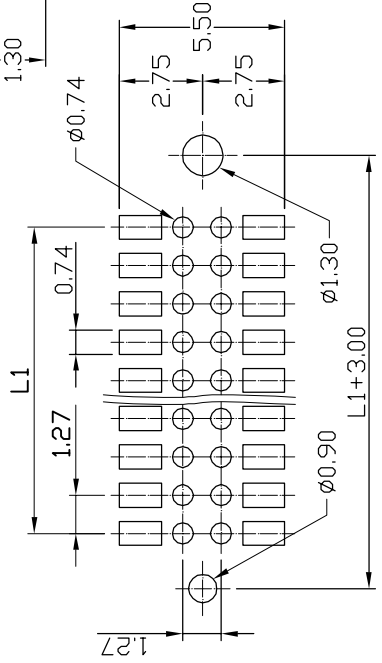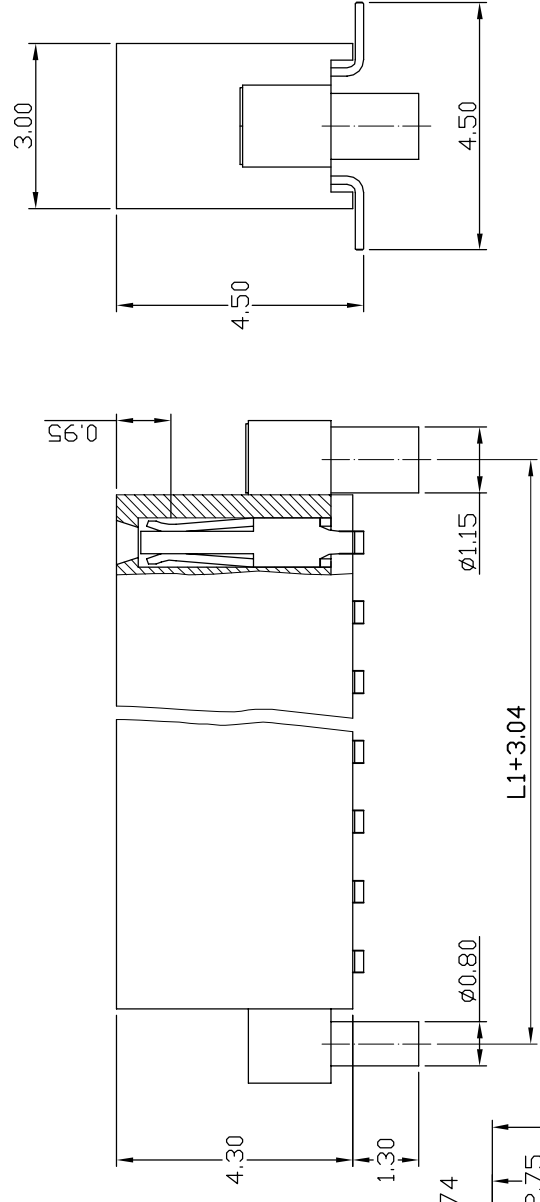

Ref.

TITLE		APP.	ANGLES	±3°	SIZE
成品規格圖			LINEAR	0.0 ±0.38	A4
PART NO 22P8742-XXM0PX-XXX-X-A		CHK.	SCALE 3:1		
DRW NO		DR.	0.00±0.25 SHEET 1/1		
UNIT mm(INCH)		PROJECT	96.01.04		
			KEN		



RECOMMENDED P. C. B. LAYOUT