
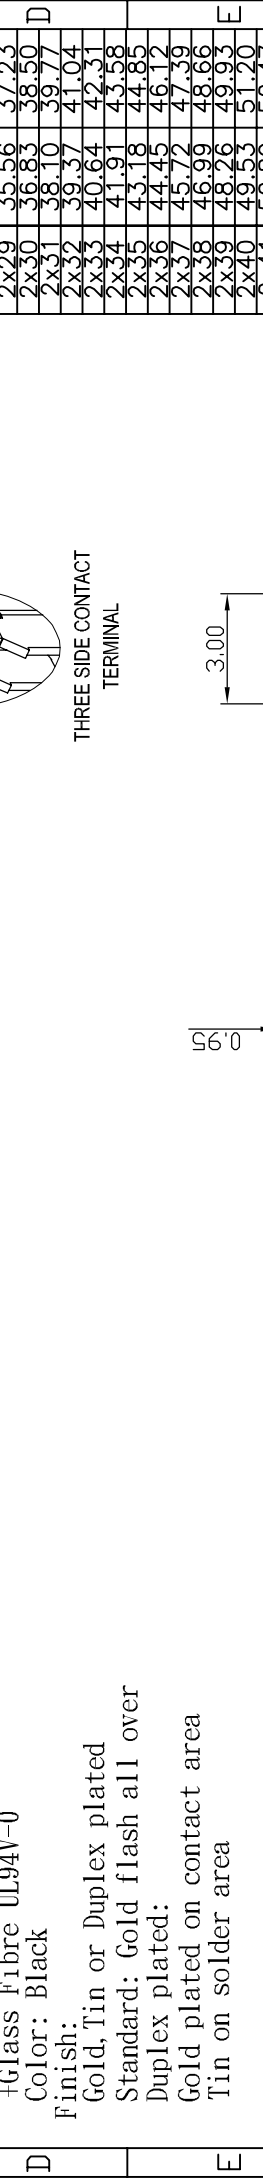


REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS
 Current Rating: 1 Amp
 Insulator resistance: 1000 Megohms Min.
 Contact resistance: 20 m ohms Max.
 Dielectric withstanding: AC 500V/minute
 Operating Temperature: -40° ~ +105°C
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic +Glass Fibre UL94V-0
 Color: Black
 Finish: Gold, Tin or Duplex plated
 Standard: Gold flash all over
 Duplex plated:
 Gold plated on contact area
 Tin on solder area

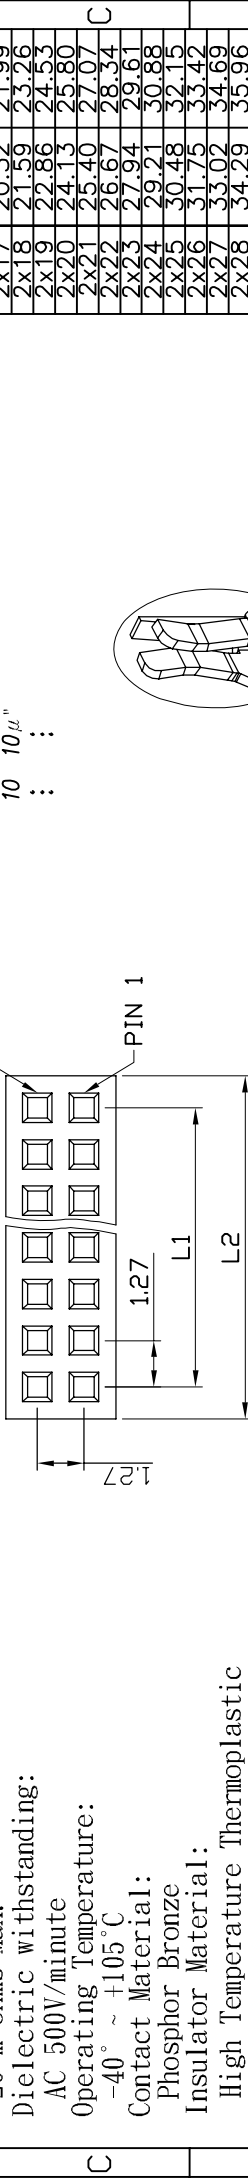

Cir-cuits	Dimension mm
2x3	L1 2.54
2x4	L2 4.21
2x5	3.81
2x6	5.48
2x7	6.75
2x8	8.02
2x9	9.29
2x10	10.56
2x11	11.83
2x12	13.10
2x13	14.37
2x14	15.64
2x15	16.91
2x16	18.18
2x17	19.45
2x18	20.72
2x19	21.99
2x20	23.26
2x21	24.53
2x22	25.80
2x23	27.07
2x24	28.34
2x25	29.61
2x26	30.88
2x27	32.15
2x28	33.42
2x29	34.69
2x30	35.96
2x31	37.23
2x32	38.50
2x33	39.77
2x34	41.04
2x35	42.31
2x36	43.58
2x37	44.85
2x38	46.12
2x39	47.39
2x40	48.66
2x41	49.93
2x42	51.20
2x43	52.47
2x44	53.74
2x45	55.01
2x46	56.28
2x47	57.55
2x48	58.82
2x49	60.09
2x50	61.36
	62.63
	63.90

RoHS Compliance

Ref.

TITLE	1.27mm Female Header Straight Type	APP.	ANGLES	±3°	SIZE	A4
PART NO	22P8742-XXS10X-XXX-X-A	CHK.	LINEAR	0.0 ±0.38	SCALE	3:1
DRW NO				0.00±0.25	SHEET	1/1
UNIT	mm(INCH)	PROJECT				
		DR.				
		KEN				
						96.01.04