
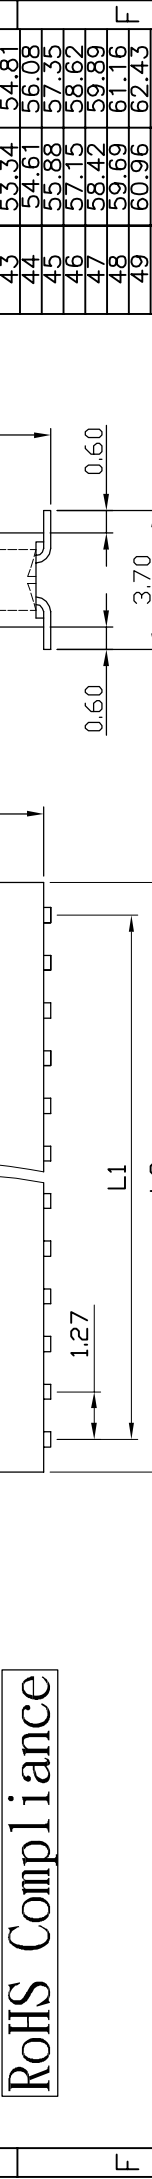
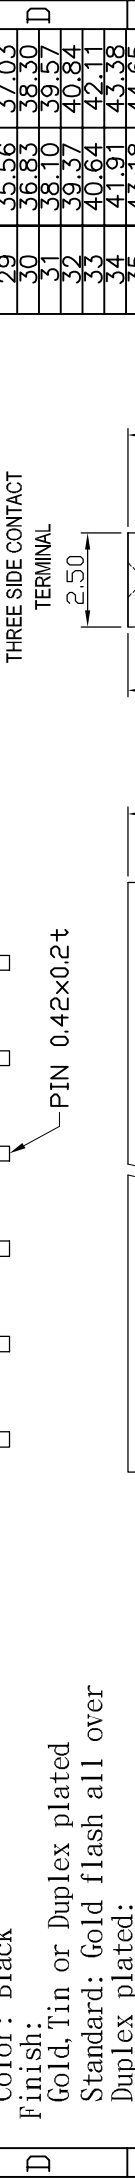


1	2	3	4	5	6	7	8
REV. DESCRIPTION	DRW. CHK.	APP.	DATE				
A	RELEASE						

**SPECIFICATIONS**  
 Current Rating: 1 Amp  
 Insulator resistance: 1000 Megohms Min.  
 Contact resistance: 20 m ohms Max.  
 Dielectric withstanding: AC 500V/minute  
 Operating Temperature: -40° ~ +105°C  
 Contact Material: Phosphor Bronze  
 Insulator Material: Nylon-6T UL94V-0  
 Color: Black  
 Finish: Gold, Tin or Duplex plated  
 Standard: Gold flash all over  
 Duplex plated: Gold plated on contact area  
 Tin on solder area  
 Mating male: 0.46 Sq

**Ordering information:**  
 22P8761-XXM10-XXX-X  
 Color  
 Number of Contact 03~50  
 A Type A  
 B Type B  
 G Gold Plated  
 T Tin Plated  
 H Duplex plated  
 Contact Plating  
 01 Normal  
 10 10μ"  
 ∴

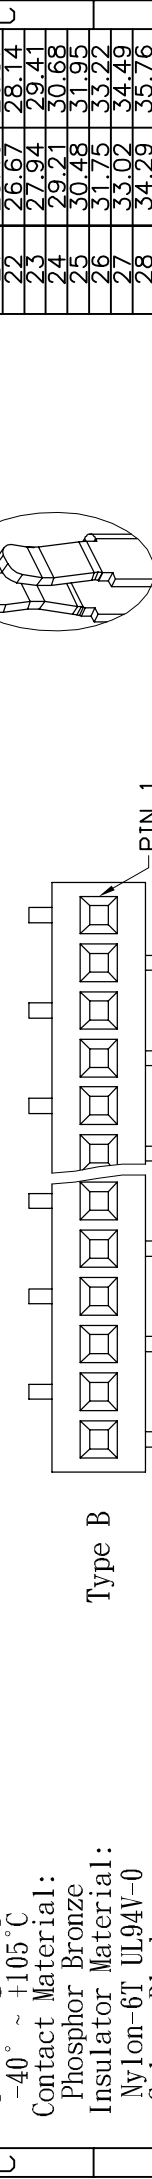

<b>RoHS Compliance</b>		<b>RECOMMENDED P. C. B. LAYOUT (Type B)</b>		<b>RECOMMENDED P. C. B. LAYOUT (Type A)</b>	
<b>Ref.</b>		<b>成品規格圖</b>		<b>APP.</b>	
<b>ANGLES</b> LINEAR		<b>±3°</b>		<b>SIZE</b> A4	
<b>SCALE</b> 3:1		<b>0.0 ±0.38</b>		<b>SCALE</b> 3:1	
<b>SHEET</b> 1/1		<b>0.00±0.25</b>		<b>SHEET</b> 1/1	
<b>DR. KEN</b>		<b>DR. KEN</b>		<b>96.01.04</b>	
<b>UNIT</b> mm(INCH)		<b>PROJECT</b>		<b>5</b>	
<b>6</b>		<b>6</b>		<b>7</b>	
<b>8</b>		<b>8</b>		<b>8</b>	

