
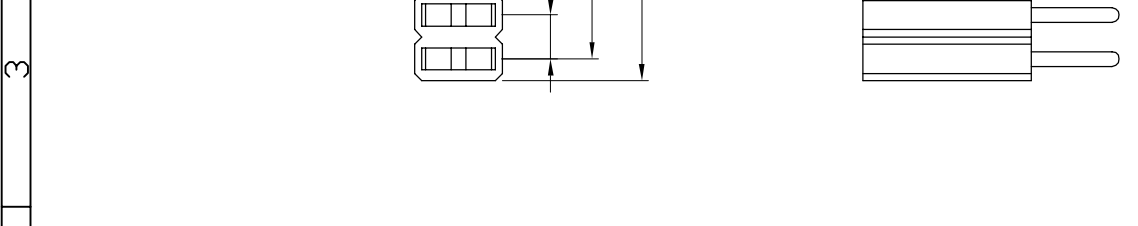
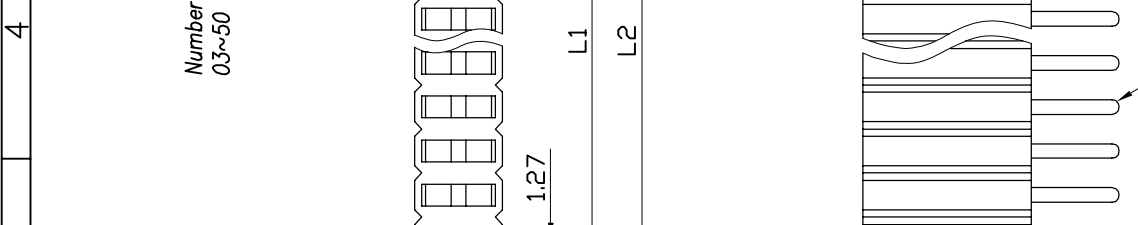
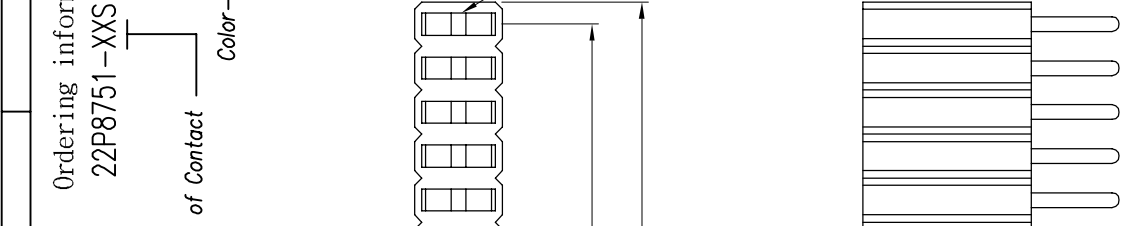


REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

**SPECIFICATIONS**  
 Current Rating:  
 1 Amp  
 Insulator resistance:  
 1000 Megohms Min.  
 Contact resistance:  
 20 m ohms Max.  
 Dielectric withstanding:  
 AC 500V/minute  
 Operating Temperature:  
 -40° ~ +105°C  
 Contact Material:  
 Phosphor Bronze  
 Insulator Material:  
 High Temperature Thermoplastic  
 +Glass Fibre UL94V-0  
 Color: Black  
 Finish:  
 Gold, Tin or Duplex plated  
 Standard: Gold flash all over  
 Duplex plated:  
 Gold plated on contact area  
 Tin on solder area  
 Mating male:  
 0.46 Sq

**Ordering information:**  
 22P8751-XXS10X-XXX-X-01  
 Number of Contact  
 03~50  
 Color  
 N Nylon-6T  
 G Gold Plated  
 T Tin Plated  
 H Duplex plated  
 Contact Plating  
 01 Normal  
 10 10μ"  
 :  
 :  
 :

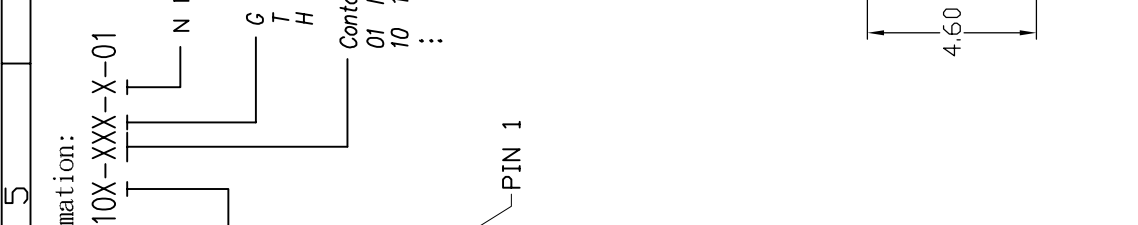

**RoHS Compliance**

**RECOMMENDED P. C. B. LAYOUT**

ANGLES	±3°	SIZE	A4
LINEAR	0.0 ±0.38	SCALE	3:1
	0.00±0.25	SHEET	1/1

DR. KEN  
 UNIT mm(INCH) PROJECT 96.01.04