
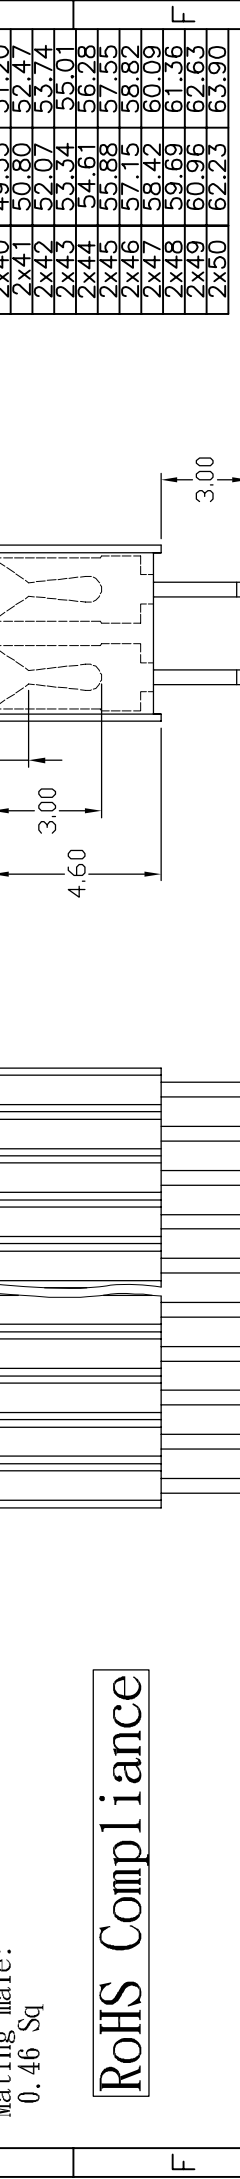
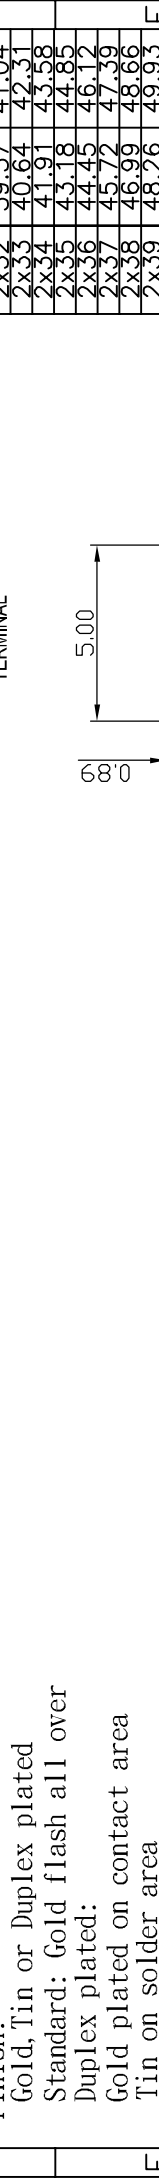


REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

**SPECIFICATIONS**  
 Current Rating: 1 Amp  
 Insulator resistance: 1000 Megohms Min.  
 Contact resistance: 20 m ohms Max.  
 Dielectric withstanding: AC 500V/minute  
 Operating Temperature: -40° ~ +105°C  
 Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature Thermoplastic +Glass Fibre UL94V-0  
 Color: Black  
 Finish: Gold, Tin or Duplex plated  
 Standard: Gold flash all over  
 Duplex plated:  
 Gold plated on contact area  
 Tin on solder area  
 Mating male: 0.46 Sq

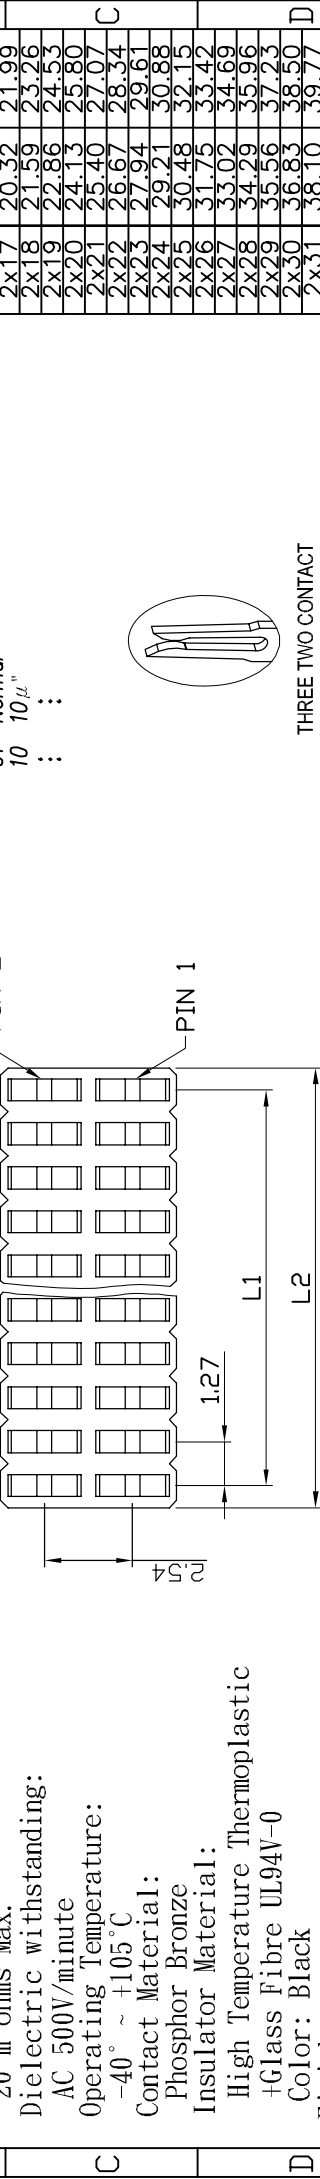

**RoHS Compliance**

**Ordering information:**  
 22P8752-XXS10X-XXX-01

Number of Contact: 06~A0(100)  
 Color: G Gold Plated, T Tin Plated, H Duplex plated

Contact Plating:  
 01 Normal  
 10 10μ"

**RoHS Compliance**

**REF. REF.**

TITLE	1.27x2.54mm Female Header Straight Type	CHK.
PART NO	22P8752-XXS10X-XXX-01	
DRW NO		
UNIT	mm(INCH)	PROJECT

APP.	ANGLES	±3°	SIZE	A4
	LINEAR	0.0 ±0.38	SCALE	3:1
		0.00±0.25	SHEET	1/1

DR. KEN  
 96.01.04

Cir-cuits	Dimension	mm
2x3	L1	2.54
2x4	L2	4.21
2x5		5.48
2x6		6.75
2x7		8.02
2x8		9.29
2x9		10.56
2x10		11.83
2x11		13.10
2x12		14.37
2x13		15.64
2x14		16.91
2x15		18.18
2x16		19.45
2x17		20.72
2x18		21.99
2x19		23.26
2x20		24.53
2x21		25.80
2x22		27.07
2x23		28.34
2x24		29.61
2x25		30.88
2x26		32.15
2x27		33.42
2x28		34.69
2x29		35.96
2x30		37.23
2x31		38.50
2x32		39.77
2x33		41.04
2x34		42.31
2x35		43.58
2x36		44.85
2x37		46.12
2x38		47.39
2x39		48.66
2x40		49.93
2x41		51.20
2x42		52.47
2x43		53.74
2x44		55.01
2x45		56.28
2x46		57.55
2x47		58.82
2x48		60.09
2x49		61.36
2x50		62.63
		63.90