
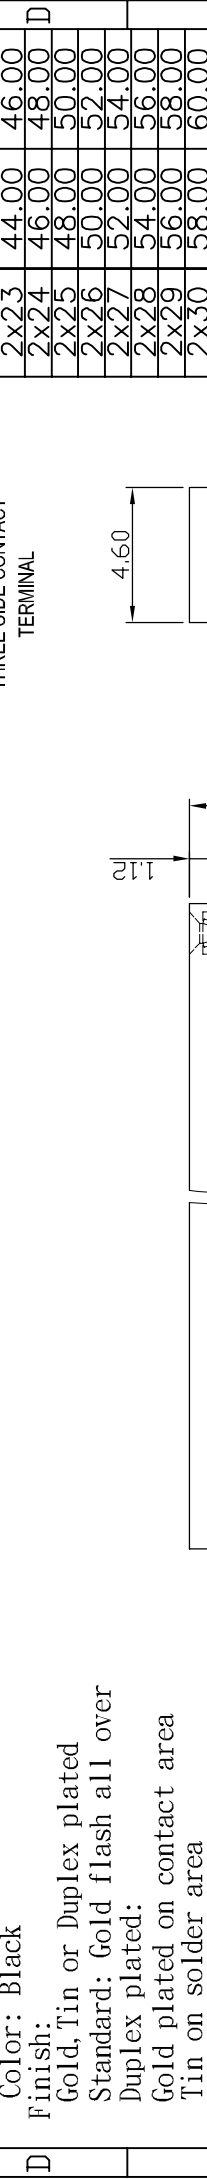



1	2	3	4	5	6	7	8
REV. DESCRIPTION	DRW. CHK.	APP.	DATE				
A	RELEASE						

SPECIFICATIONS
 Current Rating: 1 Amp
 Insulator resistance: 1000 Megohms Min.
 Contact resistance: 25 m ohms Max.
 Dielectric withstanding: AC 500V/minute
 Operating Temperature: -40° ~ +105°C
 Contact Material: Phosphor Bronze
 Insulator Material: Nylon-6T UL 94V-0
 Color: Black
 Finish: Gold, Tin or Duplex plated
 Standard: Gold flash all over Duplex plated:
 Gold plated on contact area
 Tin on solder area

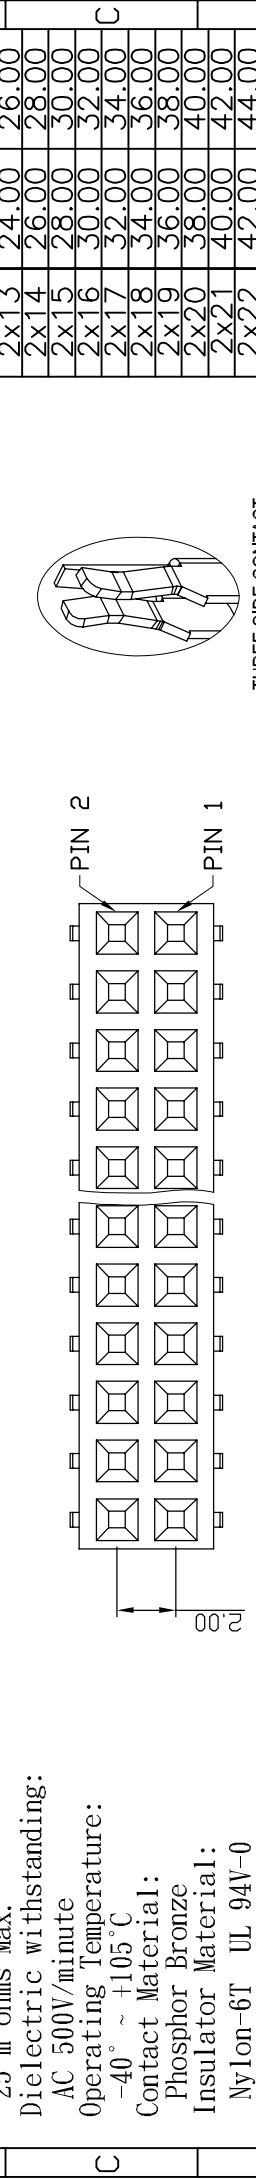

Cir-uits	Dimension mm
2x2	L1
2x3	L2
2x4	2.00
2x5	4.00
2x6	6.00
2x7	8.00
2x8	10.00
2x9	12.00
2x10	14.00
2x11	16.00
2x12	18.00
2x13	20.00
2x14	22.00
2x15	24.00
2x16	26.00
2x17	28.00
2x18	30.00
2x19	32.00
2x20	34.00
2x21	36.00
2x22	38.00
2x23	40.00
2x24	42.00
2x25	44.00
2x26	46.00
2x27	48.00
2x28	50.00
2x29	52.00
2x30	54.00
2x31	56.00
2x32	58.00
2x33	60.00
2x34	62.00
2x35	64.00
2x36	66.00
2x37	68.00
2x38	70.00
2x39	72.00
2x40	74.00
	76.00
	78.00
	80.00

RoHS Compliance

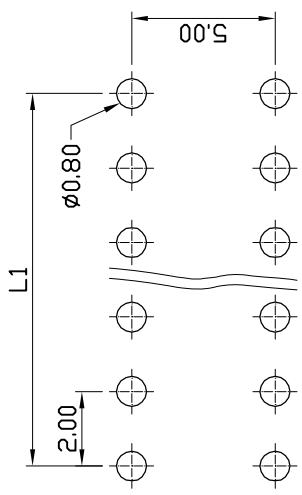

Ref.

成品規格圖 TITLE: 2.00mm Female Header Side Entry Type CHK. PART NO: 22P8242-XXC10X-XXX-5 DRW NO: UNIT: mm(INCH) PROJECT:		APP. DR. KEN 96.01.04	ANGLES: ±3° LINEAR: 0.0 ±0.38 0.00±0.25	SIZE: A4 SCALE: 3:1 SHEET: 1/1
RECOMMENDED P. C. B. LAYOUT				