

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

Ordering information:
22P8252-XXC10X-XXX

Number of Contact
 06~50

Color

G Gold Plated
 T Tin Plated
 H Duplex plated

Contact Plating
 01 Normal
 10 10 μ "
 :
 :
 :

SPECIFICATIONS

Current Rating:
 1 Amp

Insulator resistance:
 1000 Megohms Min.

Contact resistance:
 25 m ohms Max.

Dielectric withstanding:
 AC 500V/minute

Operating Temperature:
 -40° ~ +105°C



Contact Material:
 Phosphor Bronze

Insulator Material:
 High Temperature
 Thermoplastic, UL 94V-0



Color: Black

Finish:
 Gold, Tin or Duplex plated
 Standard: Gold flash all over
 Duplex plated:
 Gold plated on contact area
 Tin on solder area

RoHS Compliance

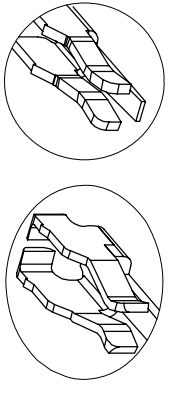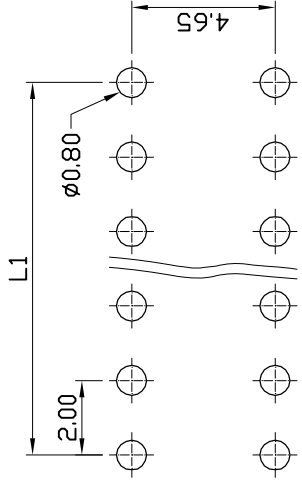

THREE SIDE CONTACT
 TERMINAL

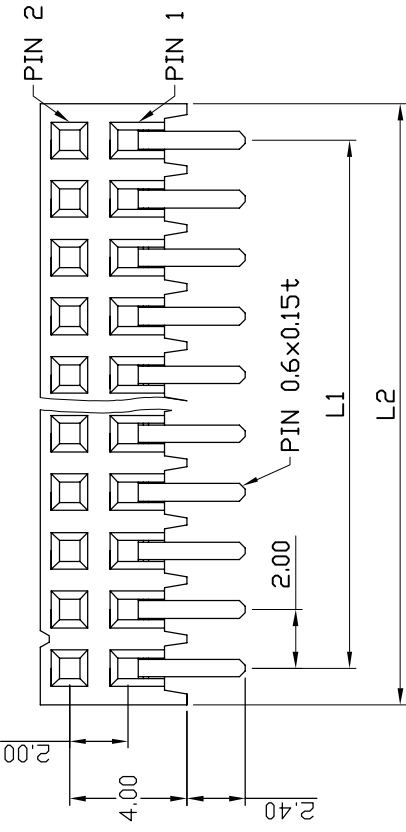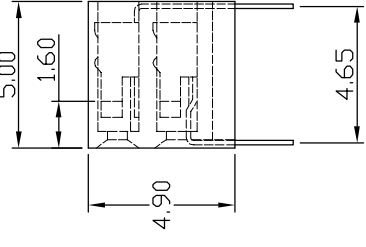

Ref.

成品規格圖		APP.	ANGLES	±3°	SIZE	A4
TITLE: 2.00mm Female Header Side Entry Type CHK.			LINEAR	0.0 ±0.38	SCALE	3:1
PART NO: 22P8252-XXC10X-XXX				0.00±0.25	SHEET	1/1
DRW NO		DR.	KEN			
UNIT	mm(INCH)	PROJECT	96.01.04			

RECOMMENDED P. C. B. LAYOUT

1	2	3	4	5	6	7	8
A	B	C	D	E	F	G	H