


REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Current Rating:
 1 Amp
 Insulator resistance:
 1000 Megohms Min.
 Contact resistance:
 25 m ohms Max.
 Dielectric withstanding:
 AC 500V/minute
 Operating Temperature:
 -40° ~ +105°C
 Contact Material:
 Phosphor Bronze
 Insulator Material:
 Nylon-6T UL94V-0
 Color: Black
 Finish:
 Gold, Tin or Duplex plated
 Standard: Gold flash all over
 Duplex plated:
 Gold plated on contact area
 Tin on solder area

RoHS Compliance



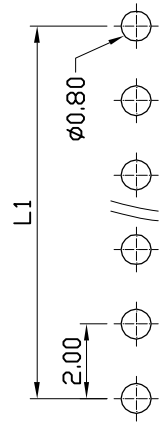


RECOMMENDED P. C. B. LAYOUT

Ordering information:

22P8241-XXD10X-XXX-01

Number of Contact
 02~40
 Color
 G Gold Plated
 T Tin Plated
 H Duplex plated
 Contact Plating
 01 Normal
 10 10μ"

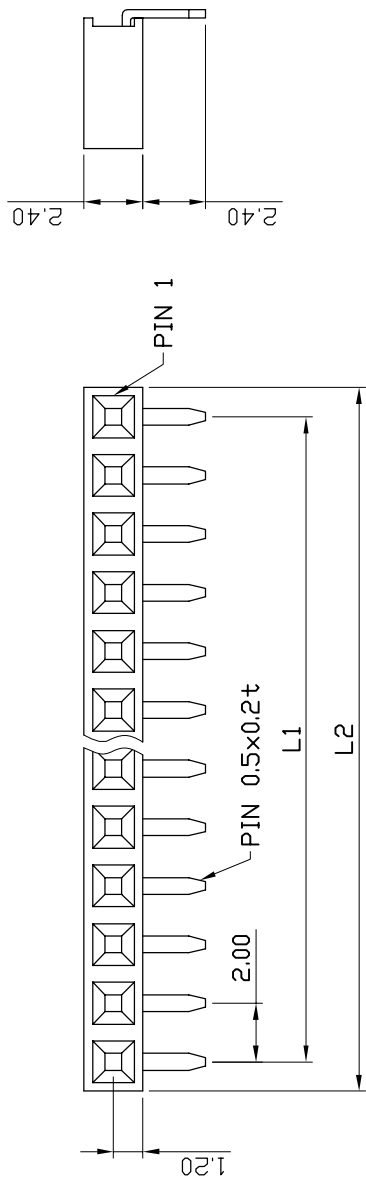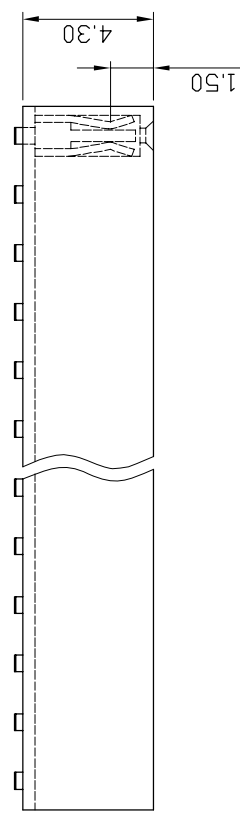

Ref.

成品規格圖		APP.	ANGLES	±3°	SIZE	A4
TITLE 2.00mm Female Header Right Angle Type		CHK.	LINEAR	0.0 ±0.38	SCALE	3:1
PART NO 22P8241-XXD10X-XXX-01		DR.	0.00±0.25 SHEET 1/1			
DRW NO	UNIT	mm(INCH)	PROJECT	DR.	KEN	96.01.04

