
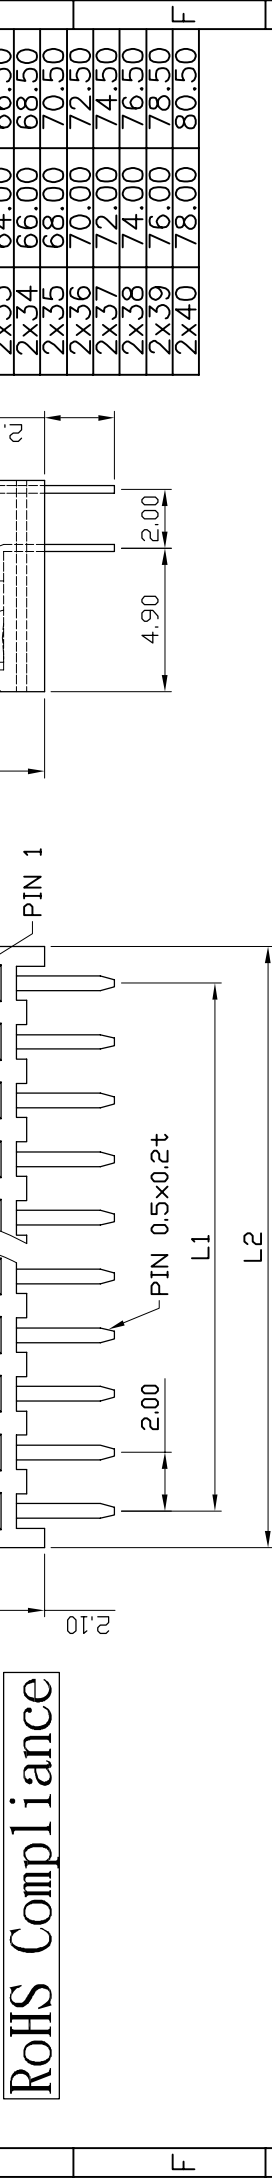


REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS
 Current Rating:
 1 Amp
 Insulator resistance:
 1000 Megohms Min.
 Contact resistance:
 25 m ohms Max.
 Dielectric withstanding:
 AC 500V/minute
 Operating Temperature:
 -40° ~ +105°C
 Contact Material:
 Phosphor Bronze
 Insulator Material:
 Nylon-46 UL94V-0
 Color: Black
 Finish:
 Gold, Tin or Duplex plated
 Standard: Gold flash all over
 Duplex plated:
 Gold plated on contact area
 Tin on solder area

Ordering information:
 22P8252-XXD10X-XXX-01
 Number of Contact: 04~80
 Color: G Gold Plated, T Tin Plated, H Duplex plated
 Contact Plating: 01 Normal, 10 10µ"

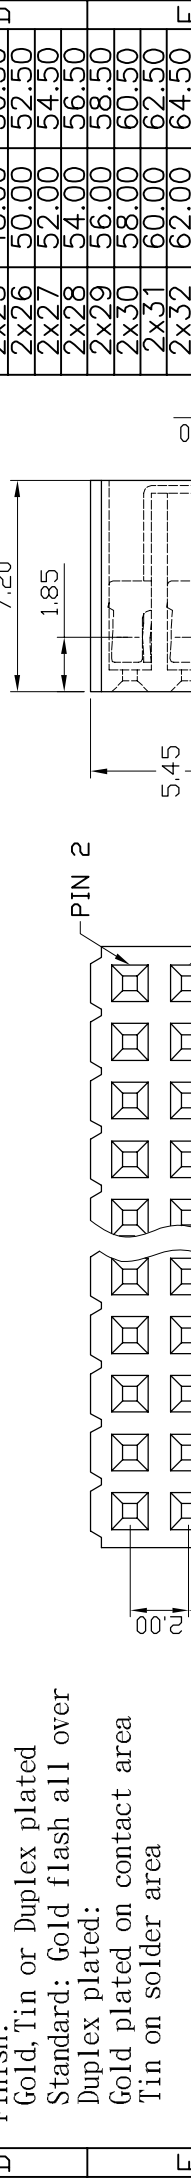

Ref.

成品規格圖		APP.	ANGLES	±3°	SIZE	A4
TITLE 2.00mm Female Header Right Angle Type		CHK.	LINEAR	0.0	±0.38	SCALE 3:1
PART NO 22P8252-XXD10X-XXX-01		DR.				
DRW NO	UNIT mm(INCH)	PROJECT				

RECOMMENDED P. C. B. LAYOUT