

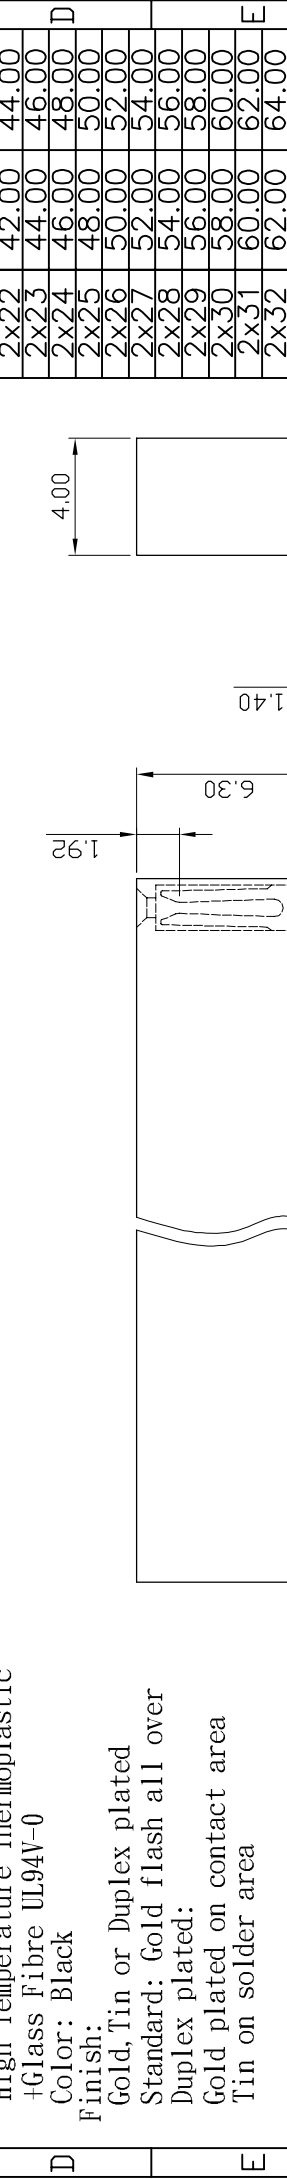


REV. DESCRIPTION	DRW. CHK.	CHK. APP.	DATE
A	RELEASE		

SPECIFICATIONS
 Current Rating: 1 Amp
 Insulator resistance: 1000 Megohms Min.
 Contact resistance: 25 m ohms Max.
 Dielectric withstanding: AC 500V/minute
 Operating Temperature: -40° ~ +105°C
 Contact Material: Brass
 Insulator Material: High Temperature Thermoplastic +Glass Fibre UL94V-0
 Color: Black
 Finish: Gold, Tin or Duplex plated
 Standard: Gold flash all over
 Duplex plated:
 Gold plated on contact area
 Tin on solder area

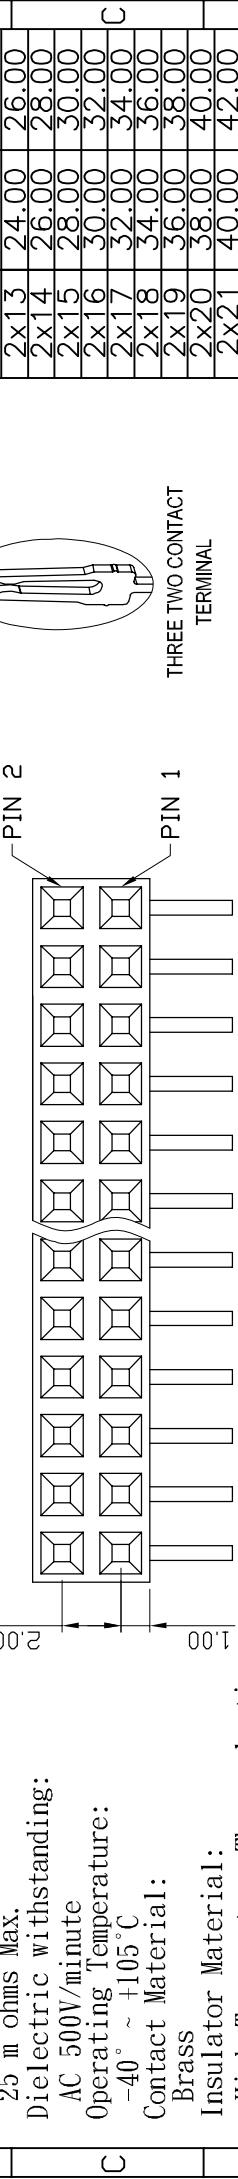

RoHS Compliance

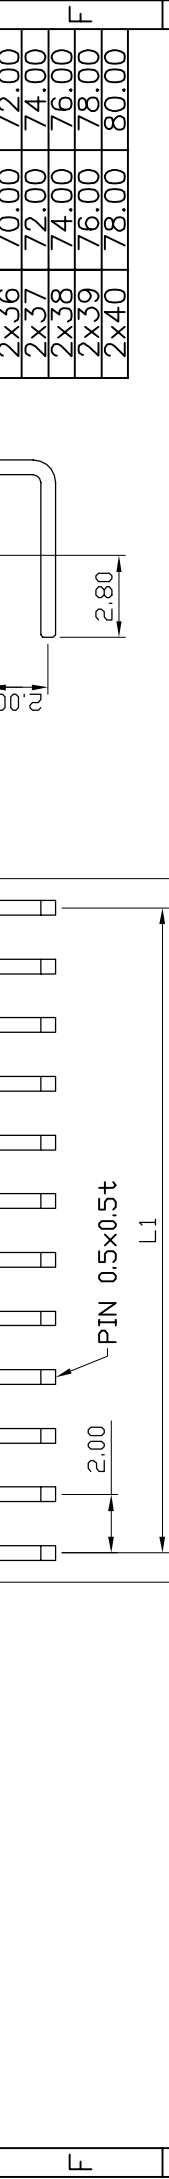

Ref.

成品規格圖 TITLE 2.00mm Female Header Right Angle Type PART NO 22P8262-XXD10X-XXX-X DRW NO UNIT mm(INCH) PROJECT 96.01.04		APP. CHK. DR. KEN	ANGLES LINEAR	±3° 0.0 ±0.38 0.00±0.25	SIZE A4 SCALE 3:1 SHEET 1/1
JVE GLOBAL			8		