
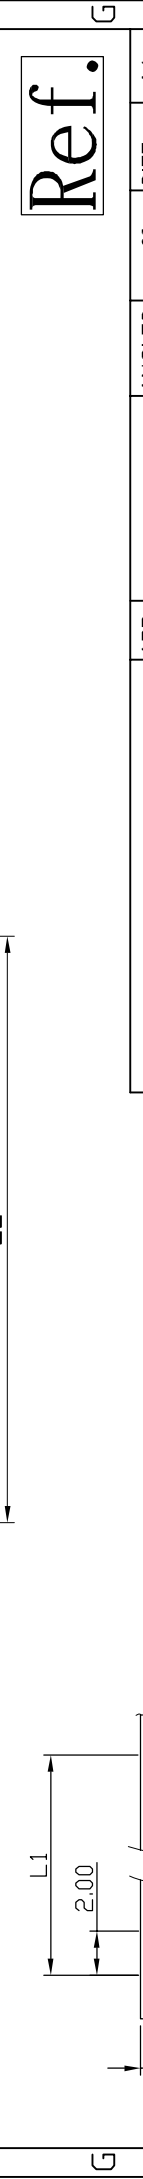
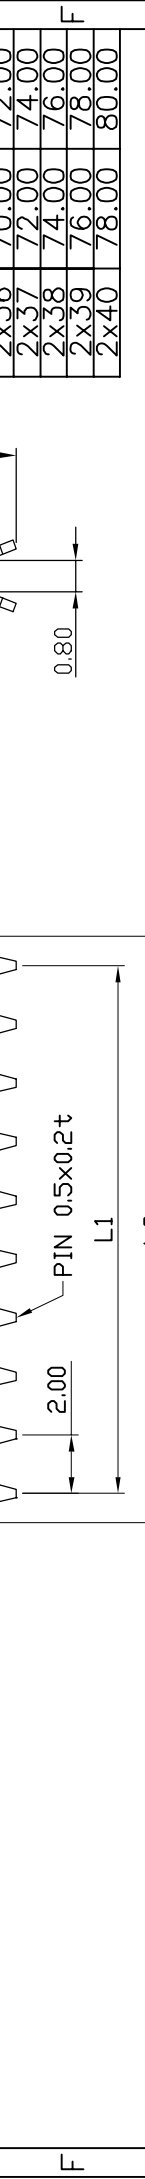
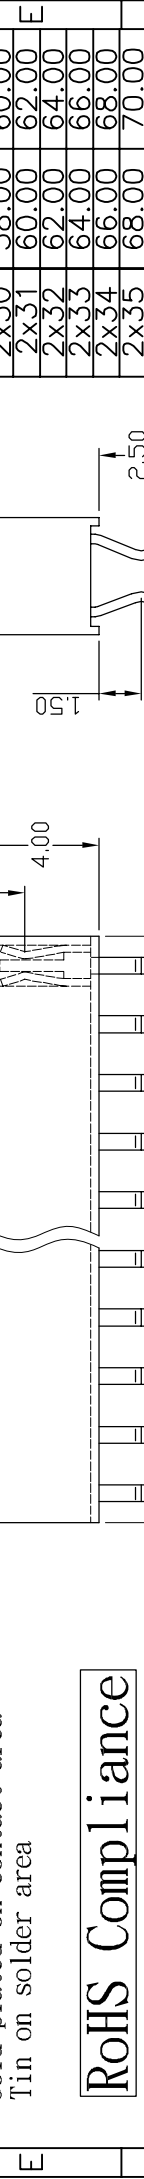
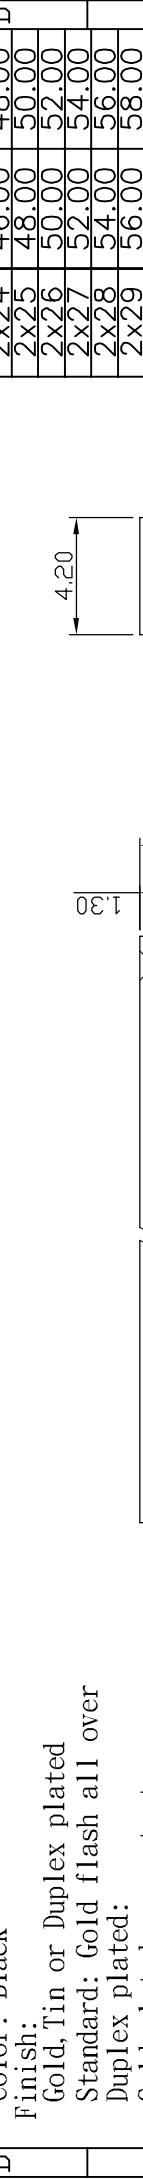


1	2	3	4	5	6	7	8
REV. DESCRIPTION	DRW. CHK.	APP.	DATE				
A	RELEASE						

**SPECIFICATIONS**  
 Current Rating: 1 Amp  
 Insulator resistance: 1000 Megohms Min.  
 Contact resistance: 25 m ohms Max.  
 Dielectric withstanding: AC 500V/minute  
 Operating Temperature: -40° ~ +105°C  
 Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature Thermoplastic +Glass Fibre UL94V-0  
 Color: Black  
 Finish: Gold, Tin or Duplex plated  
 Standard: Gold flash all over  
 Duplex plated:  
 Gold plated on contact area  
 Tin on solder area

Ordering information:  
 22P8242-XXH10X-XXX-X  
 Number of Contact 04~80  
 Color N Nylon-6T  
 Contact Plating G Gold Plated  
 01 Normal T Tin Plated  
 10 10 $\mu$ " H Duplex plated

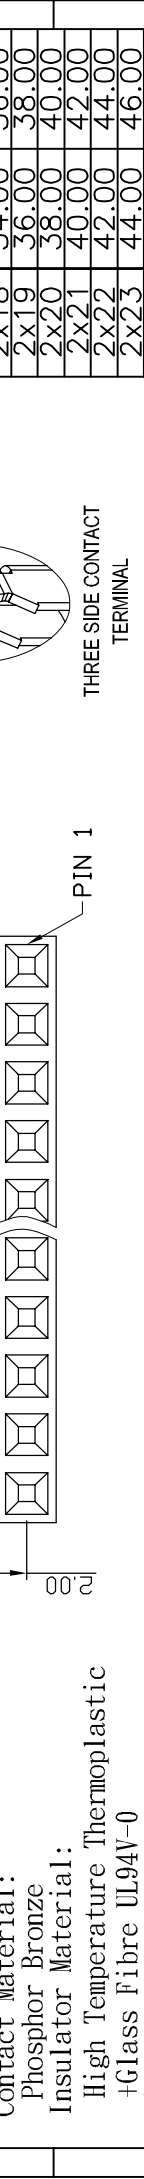

APP.		ANGLES	±3°	SIZE	A4
TITLE 2.00 Female Header Clip Type		LINEAR	0.0 ±0.38	SCALE	3:1
PART NO 22P8242-XXH10X-XXX-X			0.00±0.25	SHEET	1/1
DRW NO		DR.	KEN		
UNIT mm(INCH)		PROJECT	96.01.04		
5		6	7		
4		3		8	

**RoHS Compliance**

成品規格圖

2.00 Female Header Clip Type

22P8242-XXH10X-XXX-X

96.01.04

RECOMMENDED P. C. B. LAYOUT

Ref.