


1	2	3	4	5	6	7	8
REV. DESCRIPTION	DRW. CHK.	APP.	DATE				
A	RELEASE						

SPECIFICATIONS
 Current Rating: 1 Amp
 Insulator resistance: 1000 Megohms Min.
 Contact resistance: 25 m ohms Max.
 Dielectric withstanding: AC 500V/minute
 Operating Temperature: -40° ~ +105°C
 Contact Material: Phosphor Bronze
 Insulator Material: Nylon-6T UL94V-0
 Color: Black
 Finish: Gold, Tin or Duplex plated
 Standard: Gold flash all over
 Duplex plated:
 Gold plated on contact area
 Tin on solder area

Ordering information:
 22P8212-XXMXXX-XXX
 Number of Contact 10~60
 10 W/O Locating Peg
 OP With Locating Peg
 Color
 G Gold Plated
 T Tin Plated
 H Duplex plated
 Contact Plating
 01 Normal
 10 10μ"

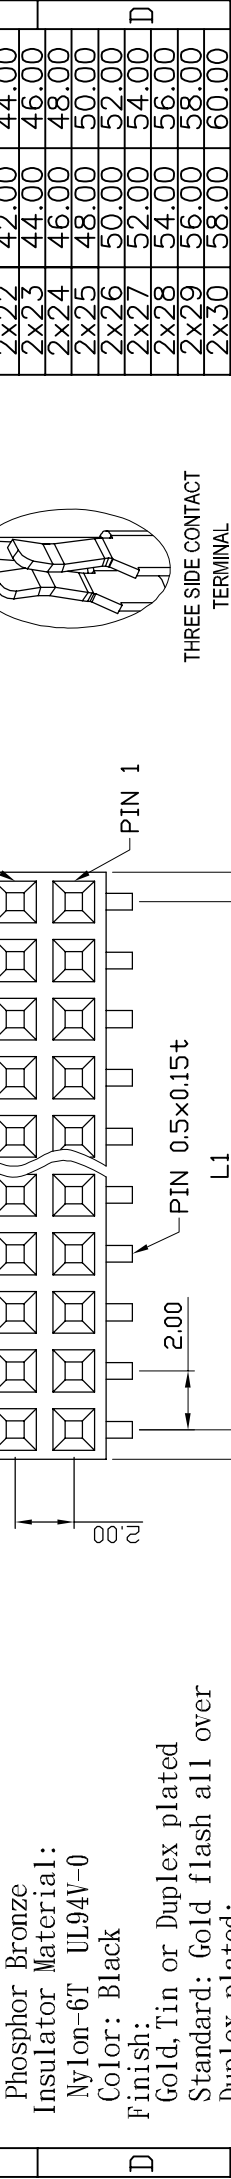


RoHS Compliance

Ref.

成品規格圖		APP.	ANGLES	±3°	SIZE	A4
TITLE 2.00mm Female Header SMT Type		CHK.	LINEAR	0.0 ±0.38	SCALE	3:1
PART NO 22P8212-XXMXXX-XXX		DR.	0.00±0.25 SHEET 1/1			
UNIT mm(INCH)		PROJECT	KEN			
96.01.04						

RECOMMENDED P. C. B. LAYOUT



96.01.04

8

7

6

5

4

3

2

1

8

7

6

5

4

3

2

1

