

| | | | | | | | |
|------------------|-----------|------|------|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| REV. DESCRIPTION | DRW. CHK. | APP. | DATE | | | | |
| A | RELEASE | | | | | | |

SPECIFICATIONS

Current Rating:
1 Amp

Insulator resistance:
1000 Megohms Min.

Contact resistance:
25 m ohms Max.

Dielectric withstanding:
AC 500V/minute

Operating Temperature:
-40° ~ +105°C

Contact Material:
Phosphor Bronze

Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0

Color: Black

Finish:
Gold, Tin or Duplex plated
Standard: Gold flash all over
Duplex plated:
Gold plated on contact area
Tin on solder area

RoHS Compliance





Ordering information:
22P8241-XXM10X-XXX-X-X

Number of Contact
03~40

Color

A Type A
B Type B
N Nylon-6T
G Gold Plated
T Tin Plated
H Duplex plated

Contact Plating
01 Normal
10 10µ"

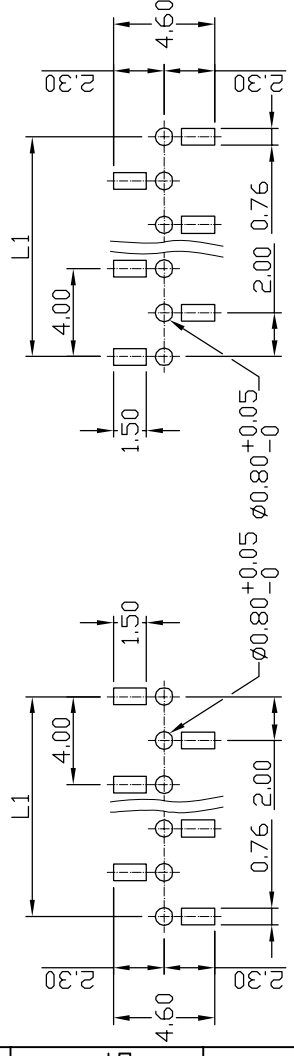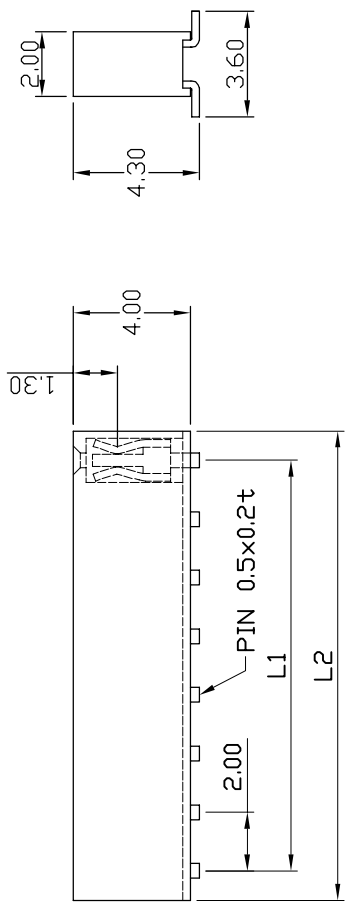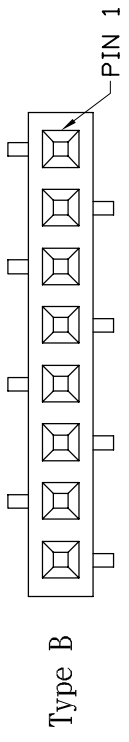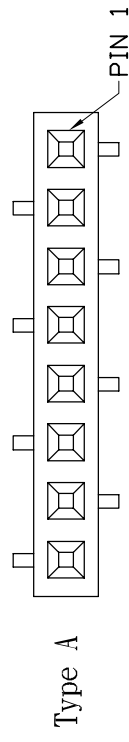

Ref.

| | | | | | | |
|-------------------------------------|---------|------|------------|-----------|-------|-----|
| 成品規格圖 | | APP. | ANGLES | ±3° | SIZE | A4 |
| TITLE 2.00mm Female Header SMT Type | | CHK. | LINEAR | 0.0 ±0.38 | SCALE | 3:1 |
| PART NO 22P8241-XXM10X-XXX-X-X | | | | 0.00±0.25 | SHEET | 1/1 |
| DRW NO | | DR. | JVE GLOBAL | | | |
| UNIT mm(INCH) | PROJECT | | 96.01.04 | | | |

RECOMMENDED P. C. B. LAYOUT(Type B) RECOMMENDED P. C. B. LAYOUT(Type A)