
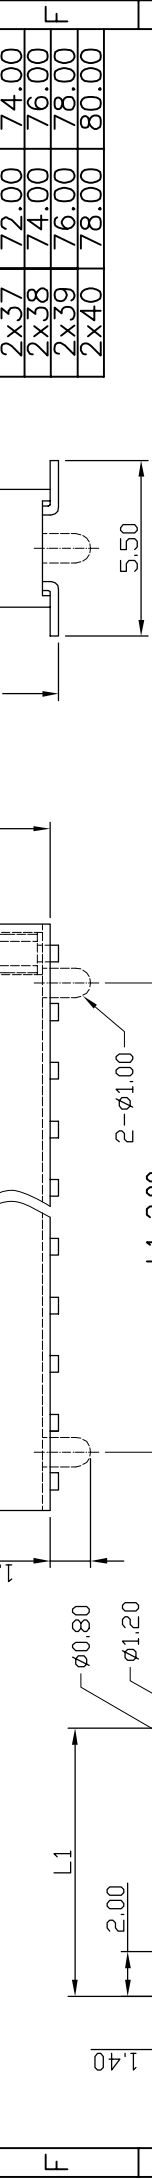
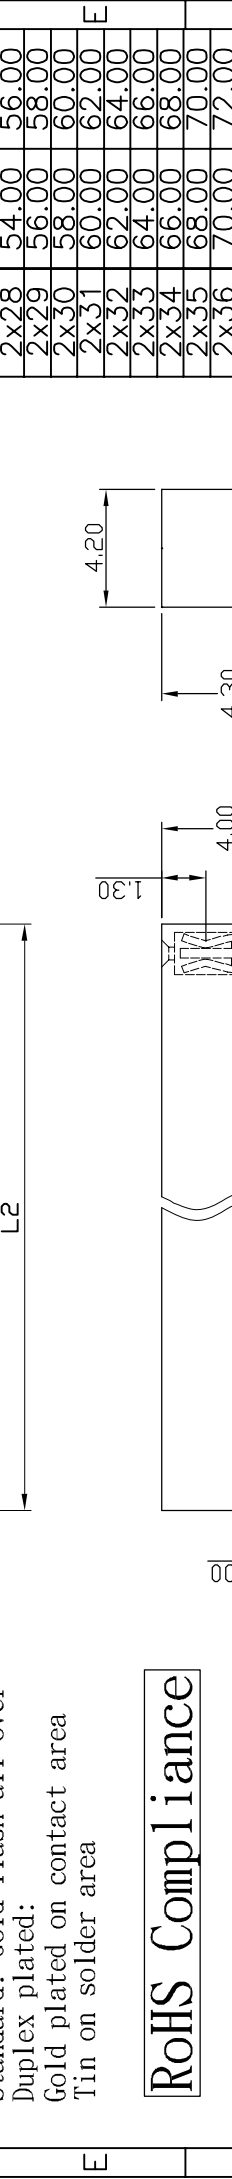


1	2	3	4	5	6	7	8
REV. DESCRIPTION	DRW. CHK.	APP.	DATE				
A	RELEASE						

**SPECIFICATIONS**  
 Current Rating: 1 Amp  
 Insulator resistance: 1000 Megohms Min.  
 Contact resistance: 25 m ohms Max.  
 Dielectric withstanding: AC 500V/minute  
 Operating Temperature: -40° ~ +105°C  
 Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature Thermoplastic +Glass Fibre UL94V-0  
 Color: Black  
 Finish: Gold, Tin or Duplex plated  
 Standard: Gold flash all over  
 Duplex plated:  
 Gold plated on contact area  
 Tin on solder area

**Ordering information:**  
 22P8242-XXMXXX-XXX-X  
 Number of Contact 04~80  
 10 W/O Locating Peg  
 OP With Locating Peg  
 Color  
 N Nylon-6T  
 G Gold Plated  
 T Tin Plated  
 H Duplex plated  
 Contact Plating  
 01 Normal  
 10 10μ"

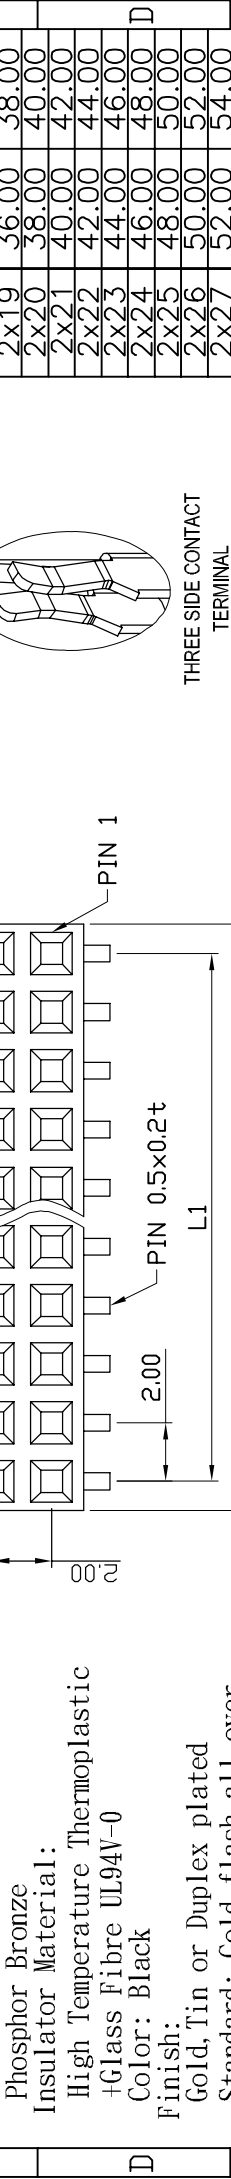

**RoHS Compliance**

RECOMMENDED P. C. B. LAYOUT		PROJECT		UNIT		DR.		CHK.		APP.	
22P8242-XXMXXX-XXX-X		mm(INCH)		KEN		96.01.04		2.00mm Female Header SMT Type		LINEAR	
TITLE		PART NO		DRW NO		UNIT		CHK.		APP.	
22P8242-XXMXXX-XXX-X		22P8242-XXMXXX-XXX-X		KEN		96.01.04		2.00mm Female Header SMT Type		LINEAR	
ANGLES		±3°		SIZE		A4		SCALE		3:1	
LINEAR		0.0 ±0.38		SCALE		3:1		SHEET		1/1	
0.00±0.25		SHEET		1/1							



Ref.