

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Current Rating:
1 Amp

Insulator resistance:
1000 Megohms Min.

Contact resistance:
25 m ohms Max.

Dielectric withstanding:
AC 500V/minute

Operating Temperature:
-40° ~ +105°C

Contact Material:
Phosphor Bronze


Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0

Color: Black

Finish:
Gold, Tin or Duplex plated

Standard: Gold flash all over
Duplex plated:
Gold plated on contact area
Tin on solder area

RoHS Compliance

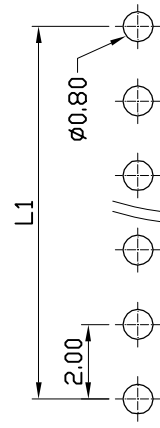

RECOMMENDED P. C. B. LAYOUT

Ordering information:

22P8241-XXS10X-XXX-X



Number of Contact
0.3~40

Color


N Nylon-6T

G Gold Plated
T Tin Plated
H Duplex plated

Contact Plating
01 Normal
10 10µ"

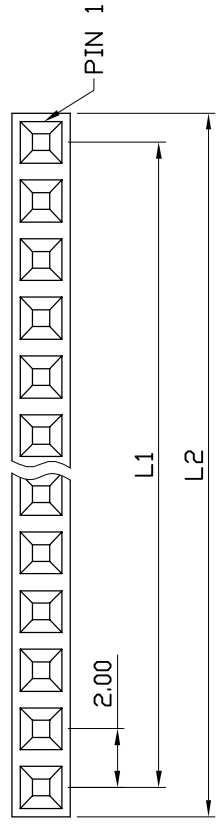

THREE SIDE CONTACT
TERMINAL

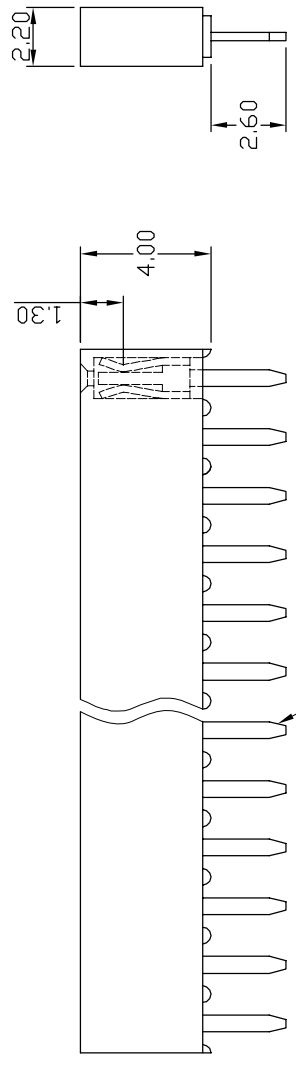

PIN 0.5x0.2t

Ref.

Cir- cuits	Dimension mm	
	L1	L2
3	4.00	6.50
4	6.00	8.50
5	8.00	10.50
6	10.00	12.50
7	12.00	14.50
8	14.00	16.50
9	16.00	18.50
10	18.00	20.50
11	20.00	22.50
12	22.00	24.50
13	24.00	26.50
14	26.00	28.50
15	28.00	30.50
16	30.00	32.50
17	32.00	34.50
18	34.00	36.50
19	36.00	38.50
20	38.00	40.50
21	40.00	42.50
22	42.00	44.50
23	44.00	46.50
24	46.00	48.50
25	48.00	50.50
26	50.00	52.50
27	52.00	54.50
28	54.00	56.50
29	56.00	58.50
30	58.00	60.50
31	60.00	62.50
32	62.00	64.50
33	64.00	66.50
34	66.00	68.50
35	68.00	70.50
36	70.00	72.50
37	72.00	74.50
38	74.00	76.50
39	76.00	78.50
40	78.00	80.50

成品規格圖		APP.	ANGLES	±3°	SIZE	A4
TITLE 2.00mm Female Header Straight Type		CHK.	LINEAR	0.0 ±0.38	SCALE	3:1
PART NO 22P8241-XXS10X-XXX-X				0.00±0.25	SHEET	1/1
DRW NO		DR.	JVEGLOBAL			
UNIT mm(INCH)		PROJECT	96.01.04			