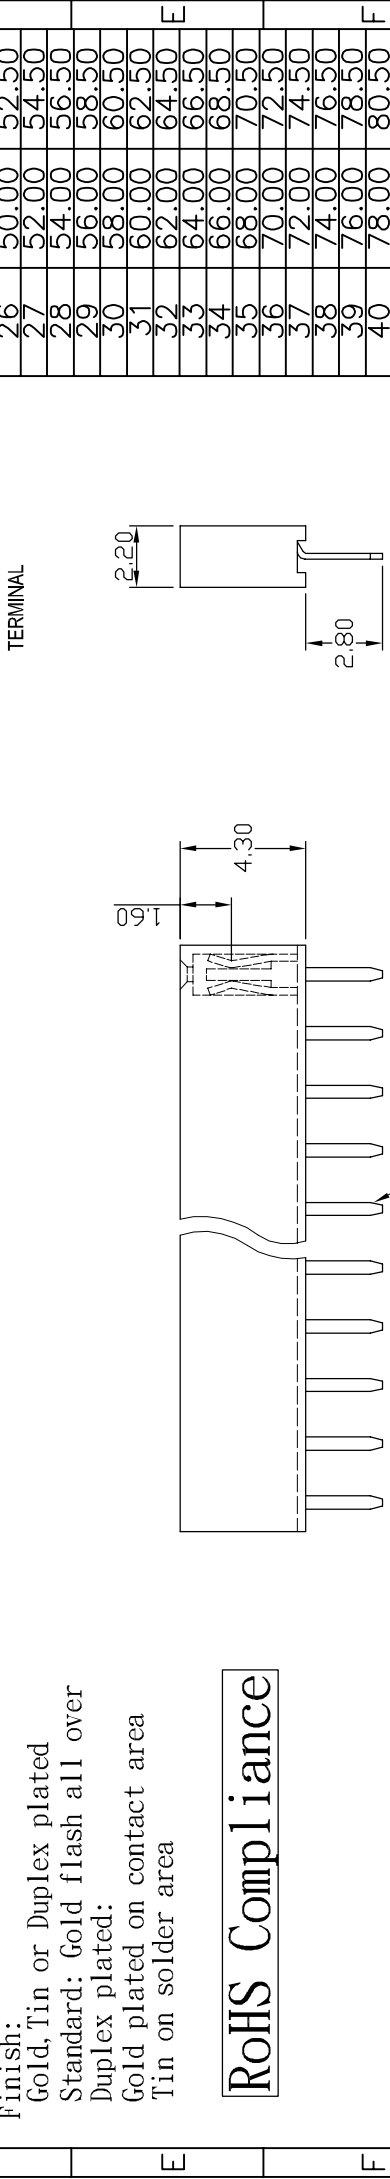
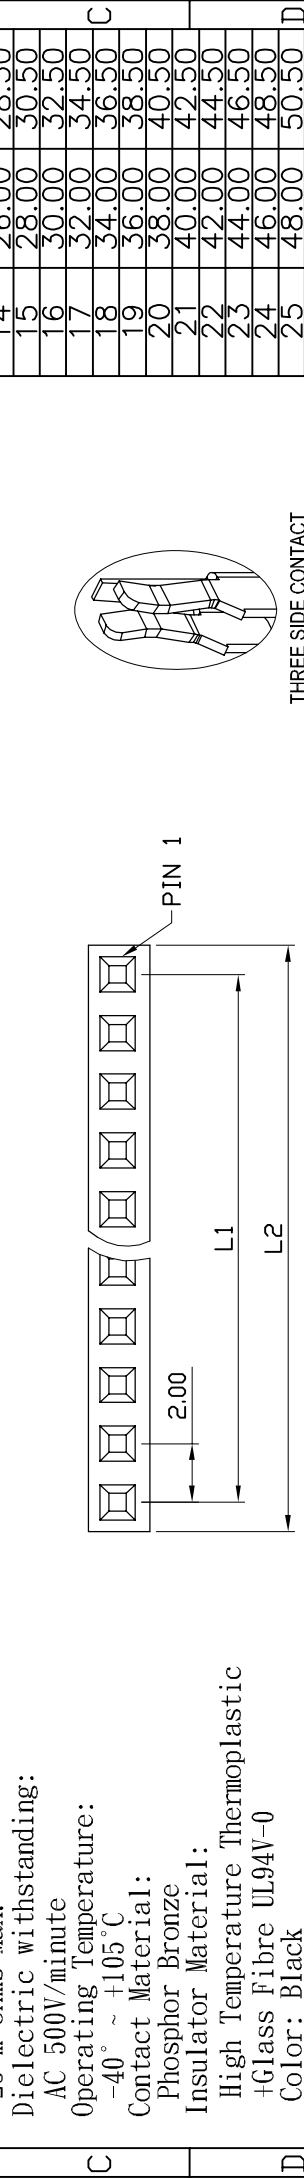


REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

**SPECIFICATIONS**  
 Current Rating: 1 Amp  
 Insulator resistance: 1000 Megohms Min.  
 Contact resistance: 25 m ohms Max.  
 Dielectric withstanding: AC 500V/minute  
 Operating Temperature: -40° ~ +105°C  
 Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature Thermoplastic +Glass Fibre UL94V-0  
 Color: Black  
 Finish: Gold, Tin or Duplex plated  
 Standard: Gold flash all over  
 Duplex plated:  
 Gold plated on contact area  
 Tin on solder area



**RoHS Compliance**

REV.		DESCRIPTION		DRW.	CHK.	APP.	DATE
A		RELEASE					

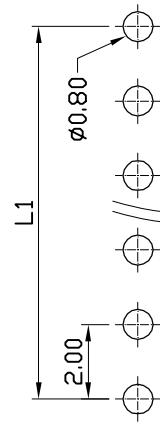
TITLE		2.00mm Female Header Straight Type		CHK.	
PART NO		22P8241-XXS10X-XXX-X-A		DR.	KEN
UNIT		mm(INCH)		PROJECT	96.01.04

ANGLES	±3°	SIZE	A4
LINEAR	0.0 ±0.38	SCALE	3:1
	0.00±0.25	SHEET	1/1

Ref.



RECOMMENDED P. C. B. LAYOUT