
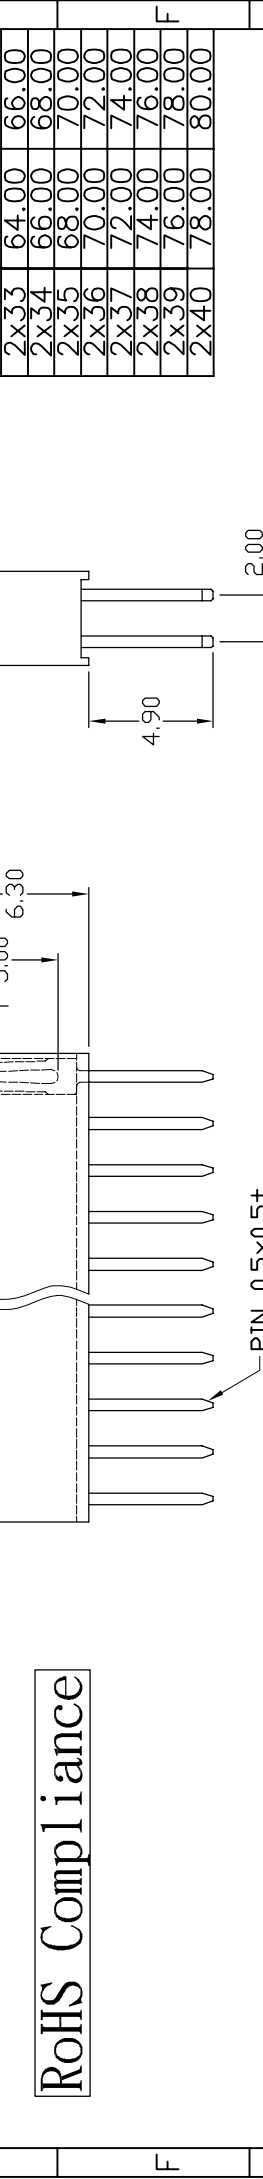
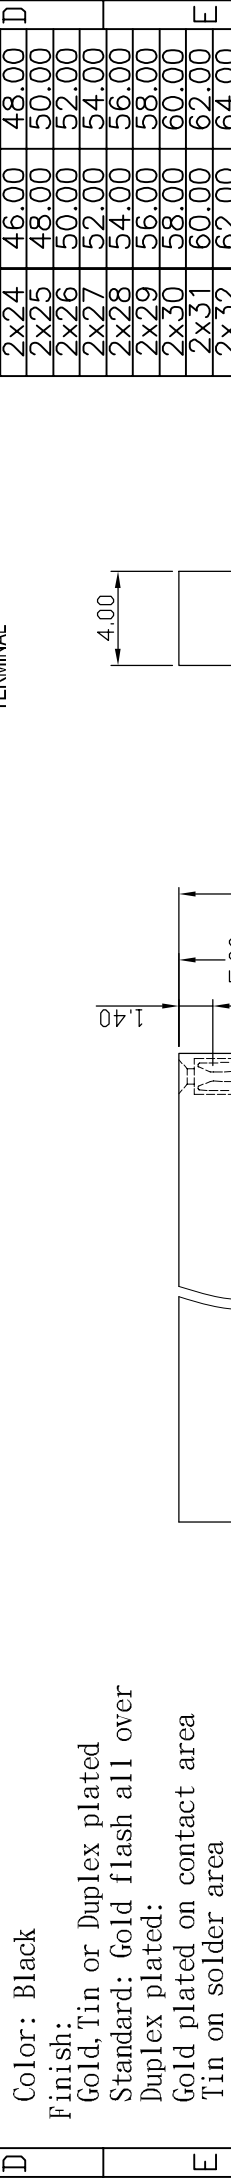


1	2	3	4	5	6	7	8
REV. DESCRIPTION	DRW. CHK.	APP.	DATE				
A	RELEASE						

SPECIFICATIONS
 Current Rating: 1 Amp
 Insulator resistance: 1000 Megohms Min.
 Contact resistance: 25 m ohms Max.
 Dielectric withstanding: AC 500V/minute
 Operating Temperature: -40° ~ +105°C
 Contact Material: Brass
 Insulator Material: High Temperature Thermoplastic +Glass Fibre UL94V-0
 Color: Black
 Finish: Gold, Tin or Duplex plated
 Standard: Gold flash all over Duplex plated:
 Gold plated on contact area
 Tin on solder area

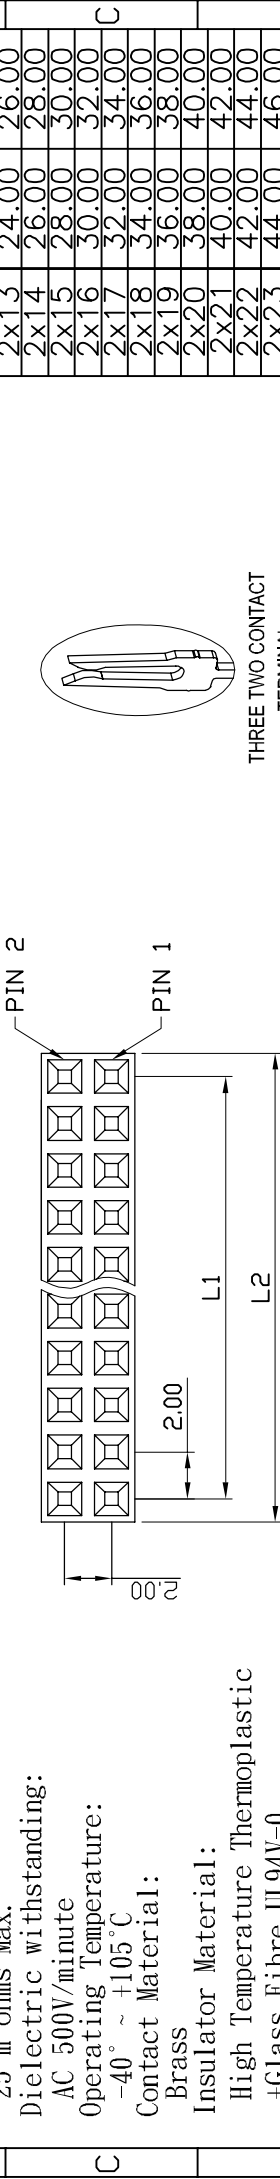

Ordering information:
 22P8262-XXSD0X-XXX-X

Number of Contact: 04~80
 Color: N Nylon-6T
 Contact Plating: G Gold Plated, T Tin Plated, H Duplex plated
 01 Normal
 10 10 μ
 :: ::

THREE TWO CONTACT TERMINAL

RoHS Compliance

RoHS Compliance

RECOMMENDED P. C. B. LAYOUT

Ref.

ANGLES	±3°	SIZE	A4
LINEAR	0.0 ±0.38	SCALE	3:1
	0.00±0.25	SHEET	1/1