
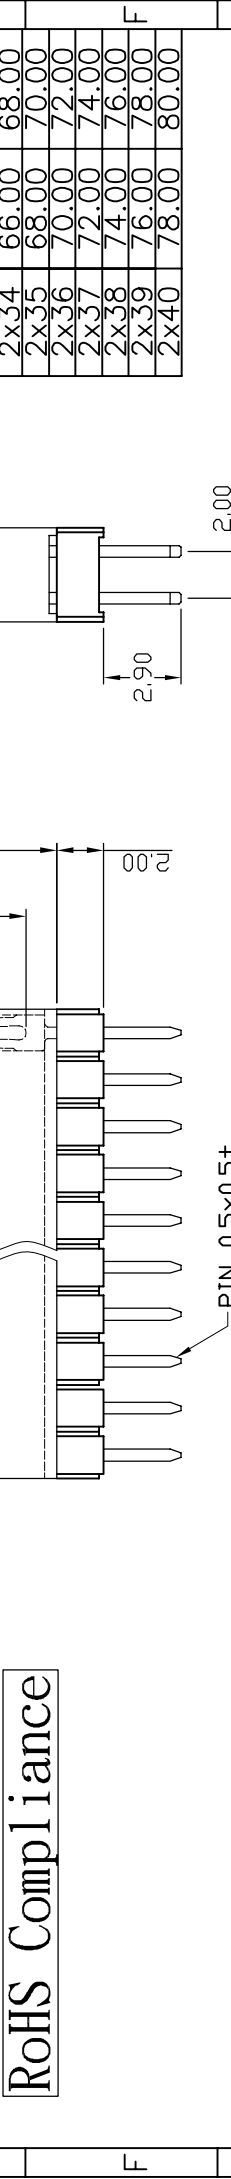
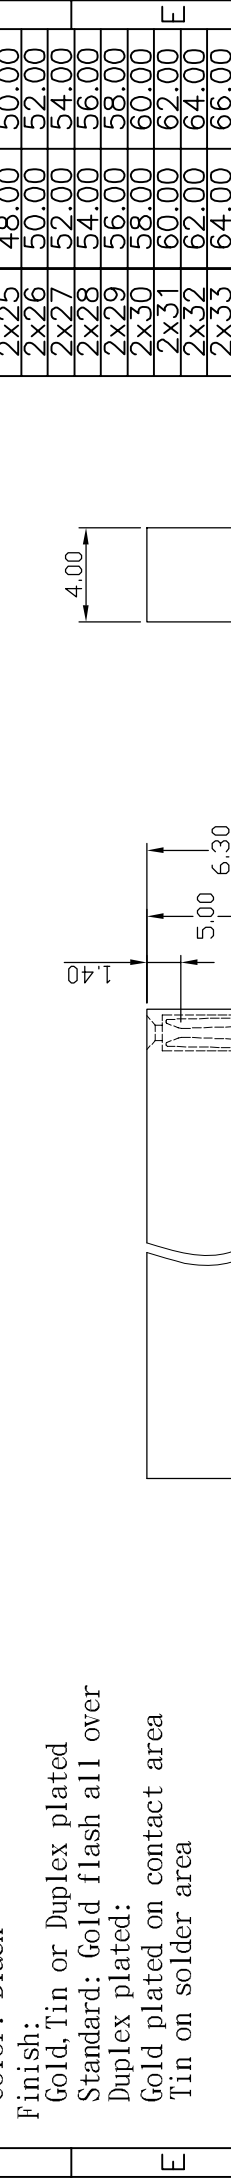



1	2	3	4	5	6	7	8
REV. DESCRIPTION	DRW. CHK.	APP.	DATE				
A	RELEASE						

SPECIFICATIONS
 Current Rating: 1 Amp
 Insulator resistance: 1000 Megohms Min.
 Contact resistance: 25 m ohms Max.
 Dielectric withstanding: AC 500V/minute
 Operating Temperature: -40° ~ +105°C
 Contact Material: Brass
 Insulator Material: High Temperature Thermoplastic +Glass Fibre UL94V-0
 Color: Black
 Finish: Gold, Tin or Duplex plated
 Standard: Gold flash all over Duplex plated:
 Gold plated on contact area
 Tin on solder area

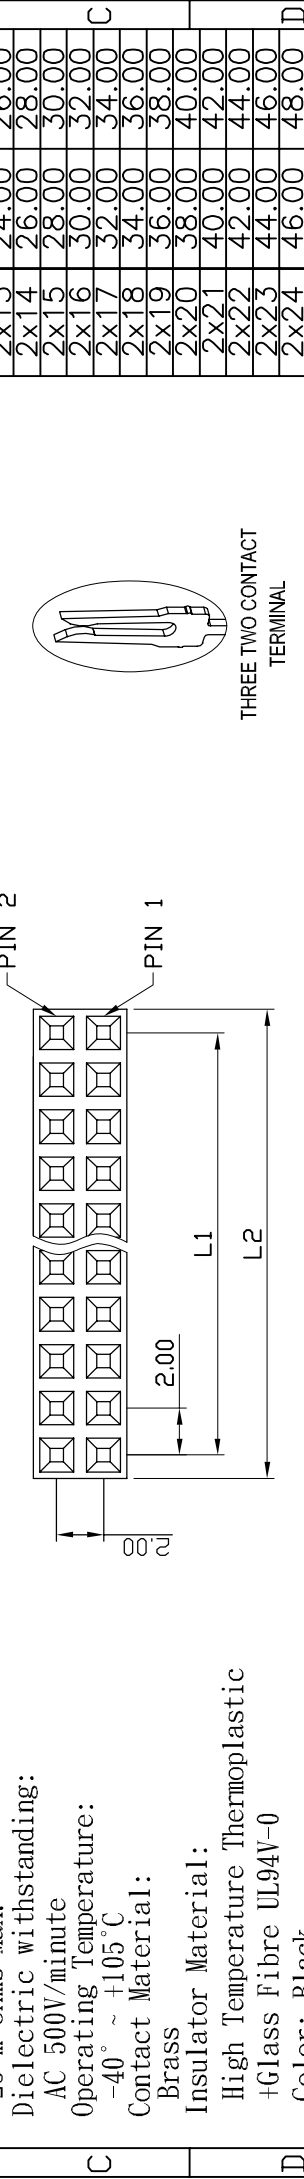

Ref.

成品規格圖		APP.		ANGLES	±3°	SIZE	A4
TITLE		2.00mm Female Header Straight Type		LINEAR	0.0 ±0.38	SCALE	3:1
PART NO		22P8262-XXSD1X-XXX-X		CHK.		SHEET	
DRW NO				DR.		1/1	
UNIT		mm(INCH)		PROJECT		KEN	
				96.01.04			

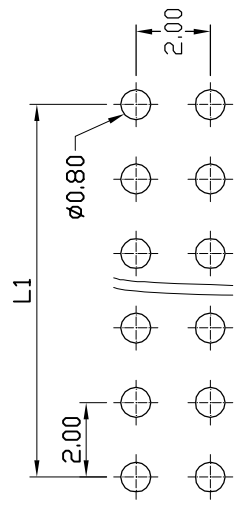

RECOMMENDED P. C. B. LAYOUT

RoHS Compliance