


REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

**SPECIFICATIONS**

- Current Rating: 1 Amp
- Insulator resistance: 1000 Megohms Min.
- Contact resistance: 25 m ohms Max.
- Dielectric withstanding: AC 500V/minute
- Operating Temperature: -40° ~ +105°C
- Contact Material: Brass
- Insulator Material: High Temperature Thermoplastic +Glass Fibre UL94V-0
- Color: Black
- Finish: Gold, Tin or Duplex plated
- Standard: Gold flash all over
- Duplex plated:
- Gold plated on contact area
- Tin on solder area

**RoHS Compliance**

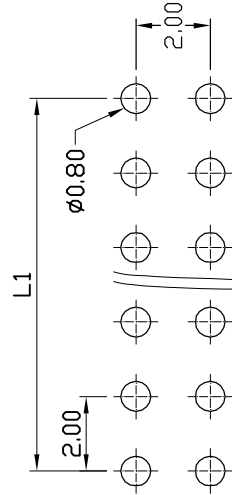


RECOMMENDED P. C. B. LAYOUT

**Ordering information:**



22P8262-XXSR3X-XXX-X

Number of Contact 04~80  
Color  
Contact Plating  
01 Normal  
10 10µ

G Gold Plated  
T Tin Plated  
H Duplex plated  
N Nylon-6T



THREE TWO CONTACT TERMINAL

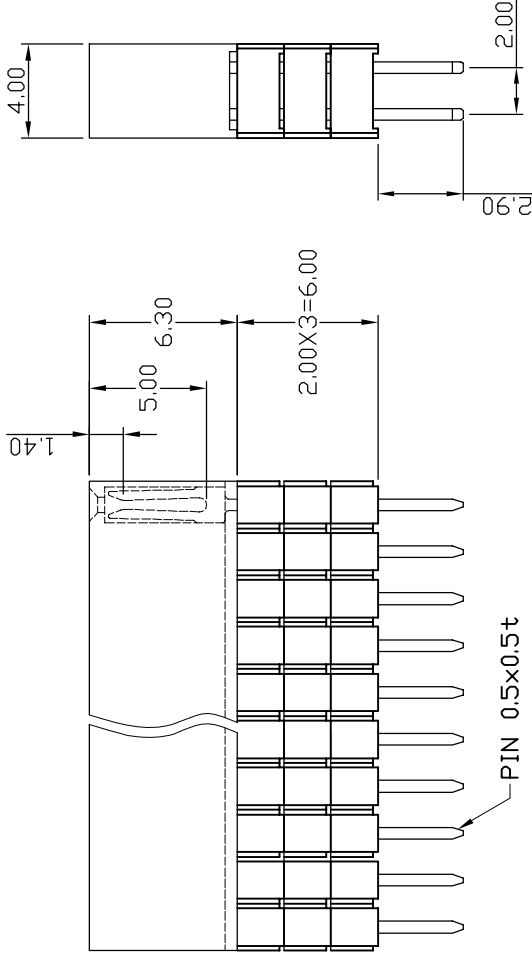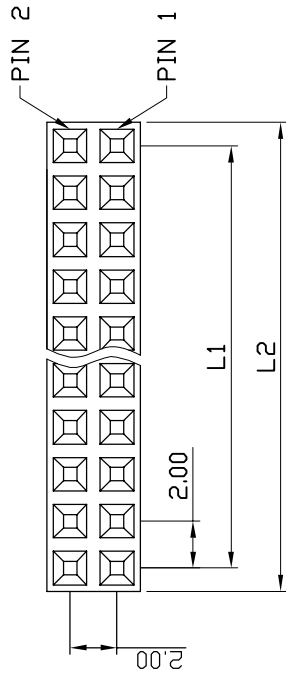

PIN 0.5x0.5t

**Ref.**

成品規格圖		APP.	ANGLES	±3°	SIZE	A4
TITLE	2.00mm Female Header Straight Type	CHK.	LINEAR	0.0 ±0.38	SCALE	3:1
PART NO	22P8262-XXSR3X-XXX-X			0.00±0.25	SHEET	1/1
DRW NO		DR.	KEN			
UNIT	mm(INCH)	PROJECT	◎			

