

| Cir-cuits | Dimension mm | | |
|-----------|--------------|-------|-------|
| | L1 | L2 | L3 |
| 2X3 | 2.54 | 10.11 | 8.56 |
| 2X5 | 5.08 | 12.65 | 11.10 |
| 2X6 | 6.35 | 13.92 | 12.37 |
| 2X7 | 7.62 | 15.19 | 13.64 |
| 2X8 | 8.89 | 16.46 | 14.91 |
| 2X10 | 11.43 | 19.00 | 17.45 |
| 2X12 | 13.97 | 21.54 | 19.99 |
| 2X13 | 15.24 | 22.81 | 21.26 |
| 2X14 | 16.51 | 24.08 | 22.53 |
| 2X15 | 17.78 | 25.35 | 23.80 |
| 2X17 | 20.32 | 27.89 | 26.34 |
| 2X20 | 24.13 | 31.70 | 30.15 |
| 2X22 | 26.67 | 34.24 | 32.69 |
| 2X25 | 30.48 | 38.05 | 36.50 |
| 2X30 | 36.83 | 44.40 | 42.85 |
| 2X32 | 39.37 | 46.94 | 45.39 |
| 2X34 | 41.91 | 49.48 | 47.93 |
| 2X40 | 49.53 | 57.10 | 55.55 |
| 2X50 | 62.23 | 69.80 | 68.25 |

Ordering information:

23X6740-XXDXXX-XXX-01

N Nylon-6T
L LCP


Number of Contact

06, 10, 12, 14, 16, 20, 22,
26, 28, 30, 34, 40, 44, 50,
60, 64, 68, 80, 100

□ 0.40 Squite Pin

Dimension
10 = 1.00mm
15 = 1.50mm
XX = X.XXmm

Color

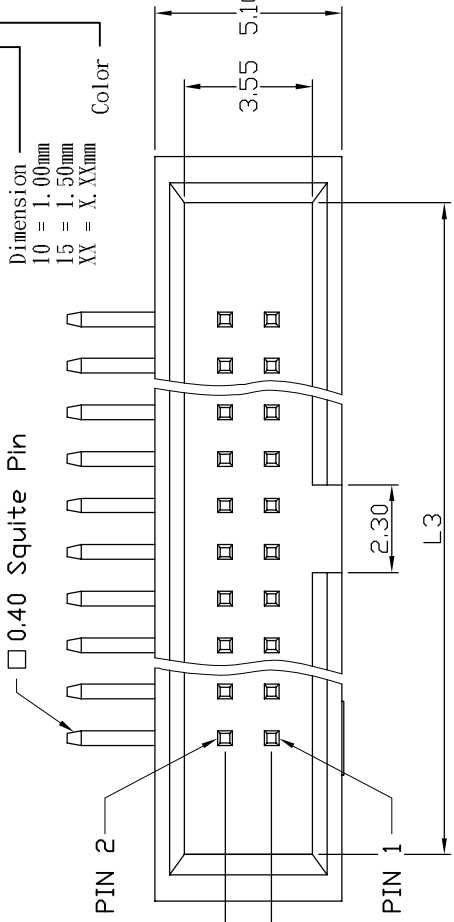

SPECIFICATIONS

Current Rating:
1 Amp

Insulator resistance:
1000 Megohms Min.

Contact resistance:
20 m ohms Max.

Dielectric withstanding:
AC 500V/minute

Operating Temperature:
-40° ~ +105°C

Contact Material:
BRASS

Insulator Material:
High Temperature Thermoplastic

+Glass Fibre UL94V-0

Color: Black

Finish:

Gold, Tin or Duplex plated


Standard: Gold flash all over

Duplex plated:


Gold plated on contact area

Tin on solder area

RoHS Compliance

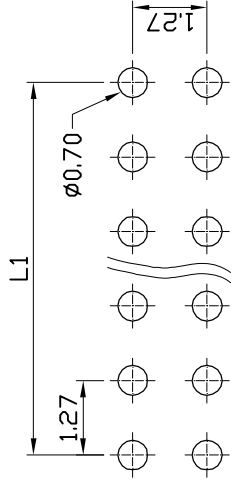

RECOMMENDED P. C. B. LAYOUT

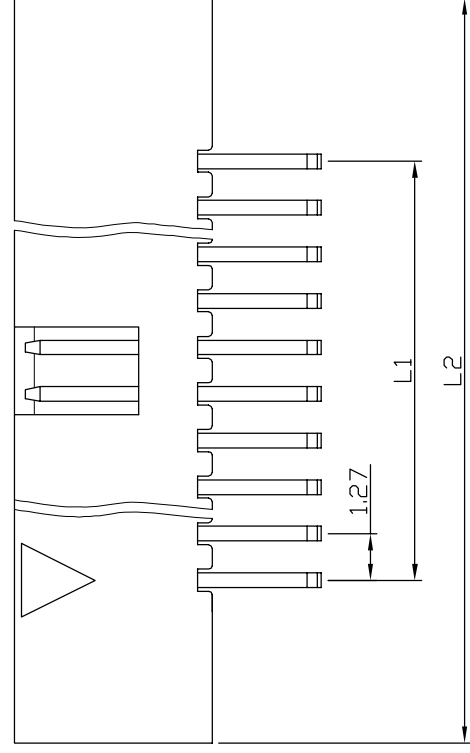

Ref.

成品規格圖

| | | | |
|---------|------------------------------------|---------|----------|
| TITLE | 1.27mm Box Header Right Angle Type | CHK. | |
| PART NO | 23X6740-XXDXXX-XXX-01 | | |
| DRW NO | | DR. | KEN |
| UNIT | mm(INCH) | PROJECT | 96.01.04 |

| | | | | |
|--------|--------|-----------|-------|-----|
| ANGLES | ±3° | SIZE | A4 | |
| | LINEAR | 0.0 ±0.38 | SCALE | 3:1 |
| | | 0.00±0.25 | SHEET | 1/1 |

