


REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Current Rating:
 1 Amp
 Insulator resistance:
 1000 Megohms Min.
 Contact resistance:
 20 m ohms Max.
 Dielectric withstanding:
 AC 500V/minute
 Operating Temperature:
 -40° ~ +105°C
 Contact Material:
 BRASS
 Insulator Material:
 High Temperature Thermoplastic
 +Glass Fibre UL94V-0
 Color: Black
 Finish:
 Gold, Tin or Duplex plated
 Standard: Gold flash all over
 Duplex plated:
 Gold plated on contact area
 Tin on solder area




RoHS Compliance

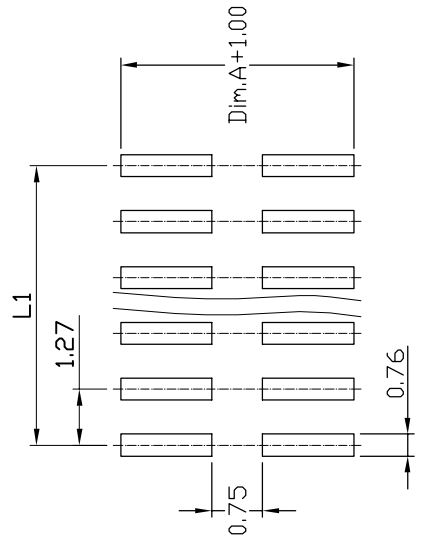

RECOMMENDED P. C. B. LAYOUT

Ordering information:

23X6740-XXMXXX-XXX-A

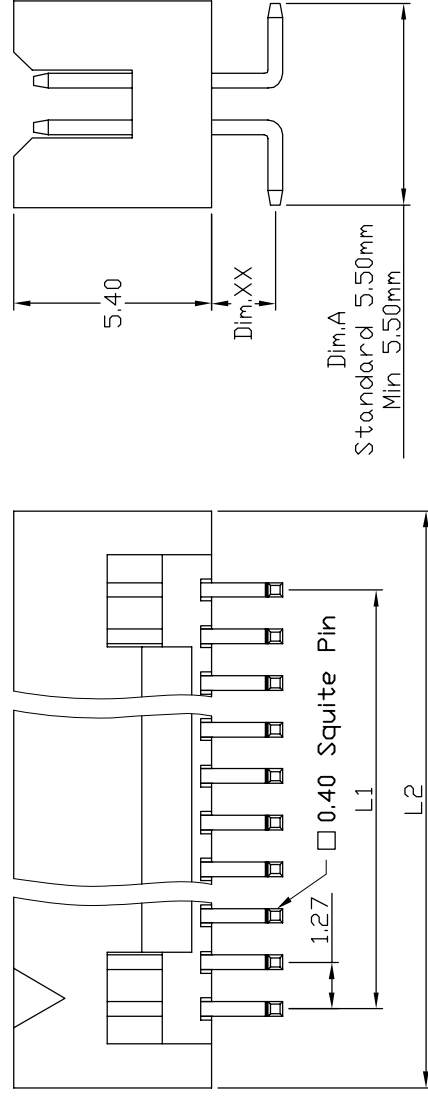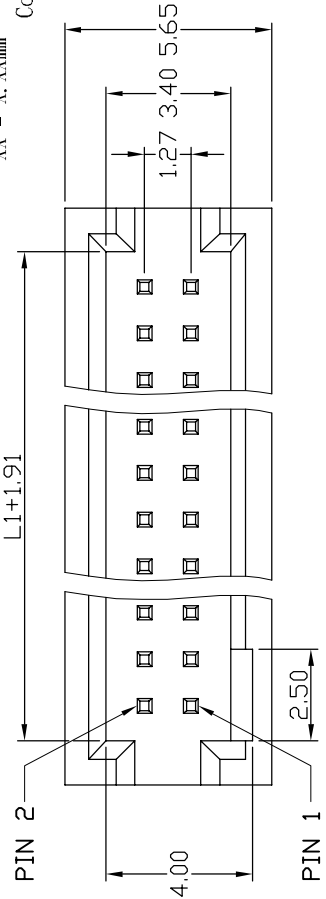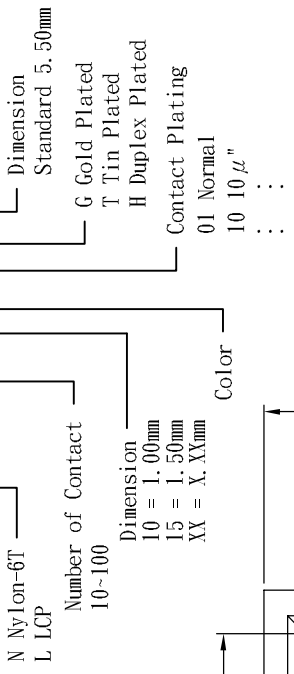

Ref.

成品規格圖		APP.	ANGLES	±3°	SIZE	A4
TITLE 1.27mm Box Header SMT Type		CHK.	LINEAR		0.0 ±0.38	SCALE 3:1
PART NO 23X6740-XXMXXX-XXX-A					0.00±0.25	SHEET 1/1
DRW NO		DR.	KEN			
UNIT	mm(INCH)	PROJECT	◎		96.01.04	

