
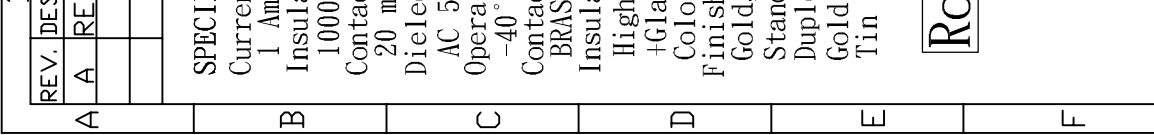
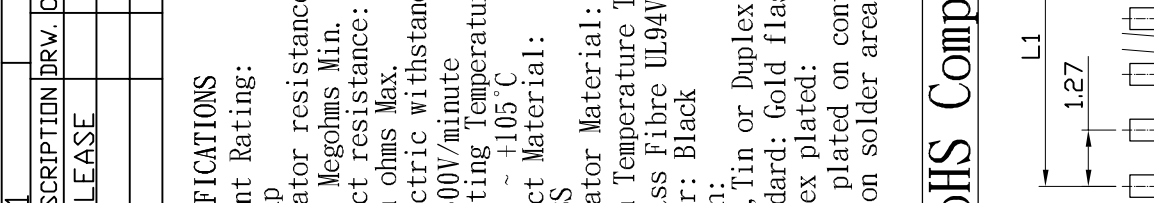
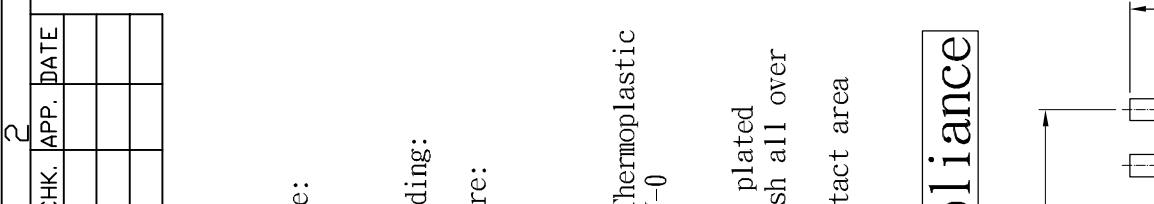
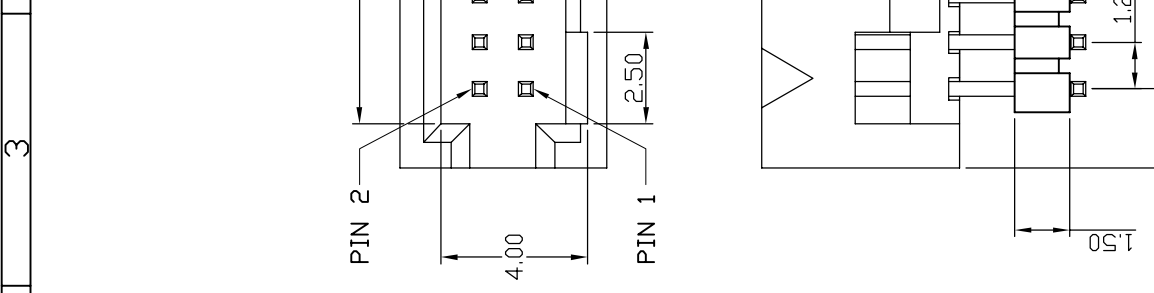
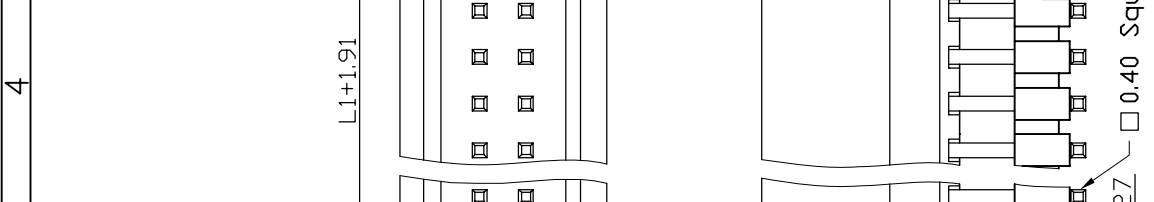
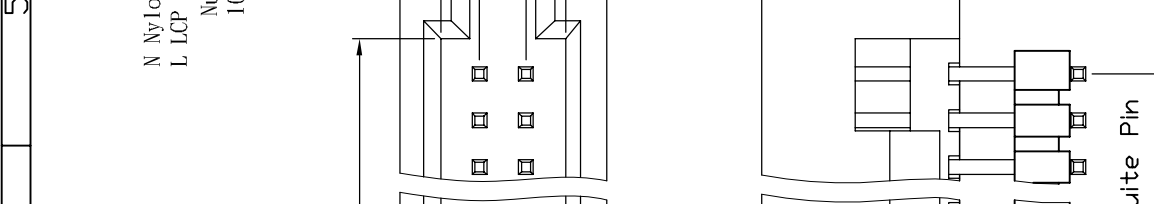
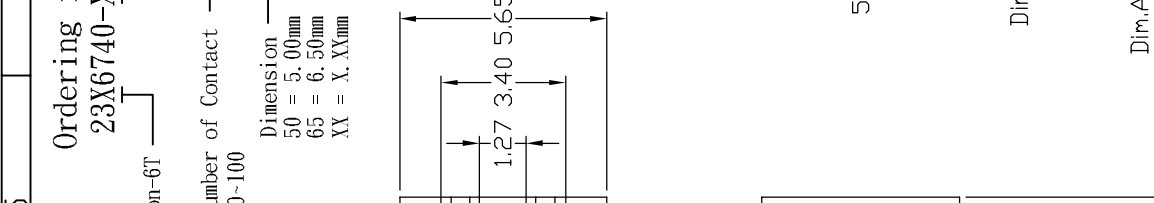


| REV. | DESCRIPTION | DRW. | CHK. | APP. | DATE |
|------|-------------|------|------|------|------|
| A | RELEASE | | | | |

SPECIFICATIONS
 Current Rating:
 1 Amp
 Insulator resistance:
 1000 Megohms Min.
 Contact resistance:
 20 m ohms Max.
 Dielectric withstanding:
 AC 500V/minute
 Operating Temperature:
 -40° ~ +105°C
 Contact Material:
 BRASS
 Insulator Material:
 High Temperature Thermoplastic
 +Glass Fibre UL94V-0
 Color: Black
 Finish:
 Gold, Tin or Duplex plated
 Standard: Gold flash all over
 Duplex plated:
 Gold plated on contact area
 Tin on solder area

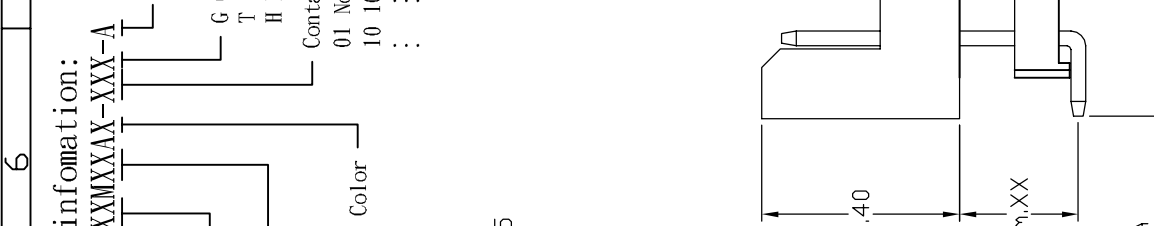

| ANGLES | ±3° | SIZE | A4 |
|--------|-----------|-------|-----|
| LINEAR | 0.0 ±0.38 | SCALE | 3:1 |
| | 0.00±0.25 | SHEET | 1/1 |

Ref.

| TITLE | 1.27mm Box Header SMT Type | CHK. |
|---------|----------------------------|---------|
| PART NO | 23X6740-XXMXXAX-XXX-A | |
| DRW NO | | |
| UNIT | mm(INCH) | PROJECT |

| APP. | DR. | 96.01.04 |
|------|-----|----------|
| | KEN | |

| mm(INCH) | PROJECT | 5 | 6 | 7 | 8 |
|----------|---------|---|---|---|---|
| | | | | | |

| UNIT | PROJECT | 5 | 6 | 7 | 8 |
|------|---------|---|---|---|---|
| | | | | | |

| UNIT | PROJECT | 5 | 6 | 7 | 8 |
|------|---------|---|---|---|---|
| | | | | | |

| UNIT | PROJECT | 5 | 6 | 7 | 8 |
|------|---------|---|---|---|---|
| | | | | | |

| UNIT | PROJECT | 5 | 6 | 7 | 8 |
|------|---------|---|---|---|---|
| | | | | | |

| UNIT | PROJECT | 5 | 6 | 7 | 8 |
|------|---------|---|---|---|---|
| | | | | | |



RECOMMENDED P. C. B. LAYOUT