

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE	Dimension mm		
						L1	L2	L3
A	RELEASE					2.54	10.11	8.56
						5.08	12.65	11.10
						6.35	13.92	12.37
						7.62	15.19	13.64
						8.89	16.46	14.91
						11.43	19.00	17.45
						13.97	21.54	19.99
						15.24	22.81	21.26
						16.51	24.08	22.53
						17.78	25.53	23.80
						20.32	27.89	26.34
						24.13	31.70	30.15
						26.67	34.24	32.69
						30.48	38.05	36.50
						36.83	44.40	42.85
						39.37	46.94	45.39
						41.91	49.48	47.93
						49.53	57.10	55.55
						62.23	69.80	68.25

**Ordering information:**




23X6740-XXMXXAX-XXX-A-01

- N Nylon-6T
- L LCP
- Number of Contact  
06, 10, 12, 14, 16, 20, 22,  
26, 28, 30, 34, 40, 44, 50,  
60, 64, 68, 80, 100
- Dimension  
50 = 5.00mm  
65 = 6.50mm  
XX = X.XXmm
- Color
- Dimension Standard 6.50mm
- G Gold Plated
- T Tin Plated
- H Duplex Plated
- Contact Plating  
01 Normal  
10 10 μ"

**SPECIFICATIONS**

- Current Rating:  
1 Amp
- Insulator resistance:  
1000 Megohms Min.
- Contact resistance:  
20 m ohms Max.
- Dielectric withstanding:  
AC 500V/minute  
Operating Temperature:  
-40° ~ +105° C
- Contact Material:  
BRASS
- Insulator Material:  
High Temperature Thermoplastic  
+Glass Fibre UL94V-0  
Color: Black
- Finish:  
Gold, Tin or Duplex plated  
Standard: Gold flash all over  
Duplex plated:  
Gold plated on contact area  
Tin on solder area

**RoHS Compliance**

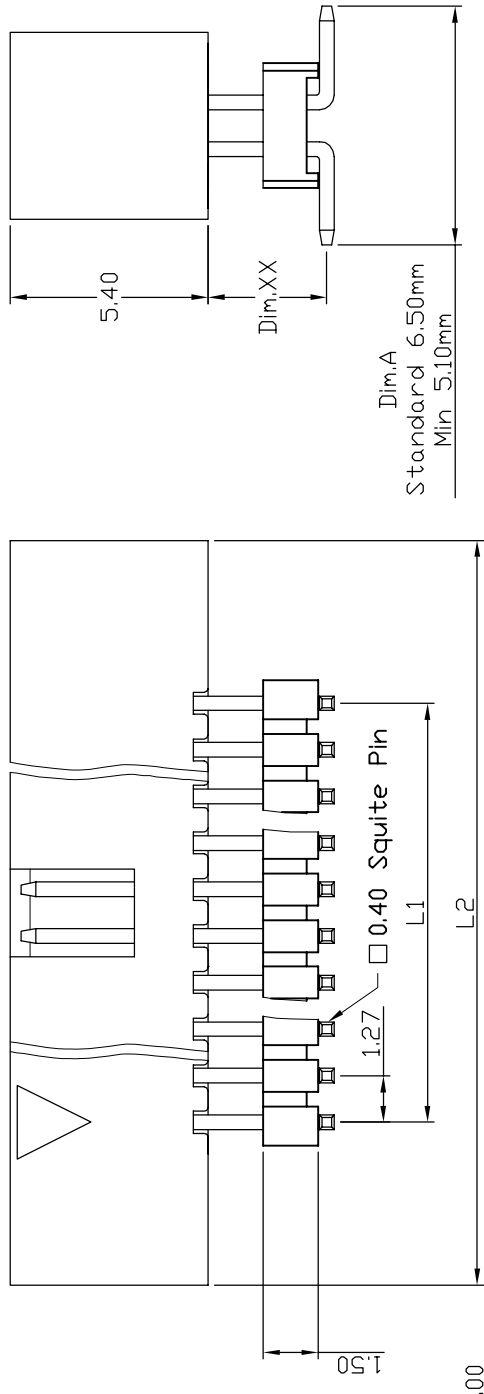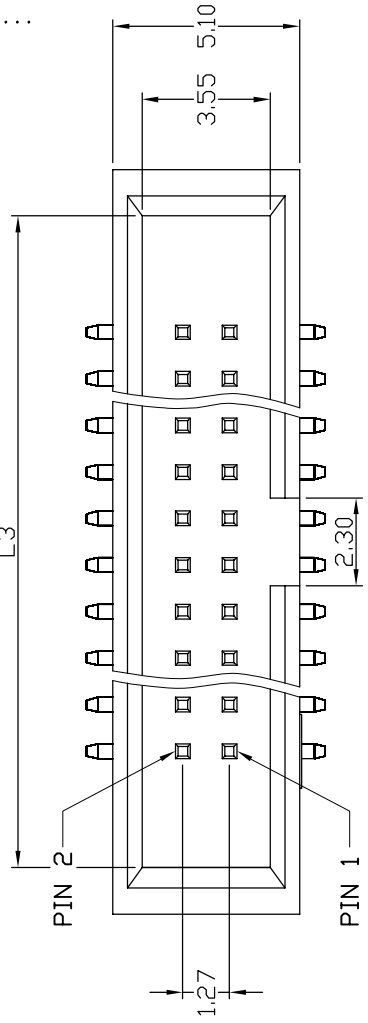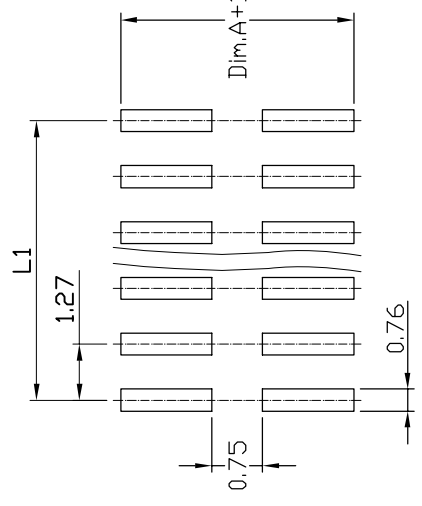

**Ref.**

成品規格圖		APP.	ANGLES ±3°	SIZE A4
TITLE	1.27mm Box Header SMT Type	CHK.	LINEAR	0.0 ±0.38 SCALE 3:1
PART NO	23X6740-XXMXXAX-XXX-A-01			0.00±0.25 SHEET 1/1
DRW NO		DR.	KEN	
UNIT	mm(INCH)	PROJECT	96.01.04	



RECOMMENDED P. C. B. LAYOUT