

| REV. | DESCRIPTION | DRW. | CHK. | APP. | DATE | Dimension mm | | |
|------|-------------|------|------|------|------|--------------|-------|-------|
| | | | | | | L1 | L2 | L3 |
| A | RELEASE | | | | | 2.54 | 10.11 | 8.56 |
| | | | | | | 5.08 | 12.65 | 11.10 |
| | | | | | | 6.35 | 13.92 | 12.37 |
| | | | | | | 7.62 | 15.19 | 13.64 |
| | | | | | | 8.89 | 16.46 | 14.91 |
| | | | | | | 11.43 | 19.00 | 17.45 |
| | | | | | | 13.97 | 21.54 | 19.99 |
| | | | | | | 15.24 | 22.81 | 21.26 |
| | | | | | | 16.51 | 24.08 | 22.53 |
| | | | | | | 17.78 | 25.53 | 23.80 |
| | | | | | | 20.32 | 27.89 | 26.34 |
| | | | | | | 24.13 | 31.70 | 30.15 |
| | | | | | | 26.67 | 34.24 | 32.69 |
| | | | | | | 30.48 | 38.05 | 36.50 |
| | | | | | | 36.83 | 44.40 | 42.85 |
| | | | | | | 39.37 | 46.94 | 45.39 |
| | | | | | | 41.91 | 49.48 | 47.93 |
| | | | | | | 49.53 | 57.10 | 55.55 |
| | | | | | | 62.23 | 69.80 | 68.25 |

Ordering information:




23X6740-XXS22X-XXX-A-01

- N Nylon-6T
- L LCP
- Number of Contact
06, 10, 12, 14, 16, 20, 22,
26, 28, 30, 34, 40, 44, 50,
60, 64, 68, 80, 100
- Color
- Contact Plating
01 Normal
10 10 μ"
: :
: :
- G Gold Plated
T Tin Plated
H Duplex Plated
- Dimension

SPECIFICATIONS

- Current Rating:
1 Amp
- Insulator resistance:
1000 Megohms Min.
- Contact resistance:
20 m ohms Max.
- Dielectric withstanding:
AC 500V/minute
Operating Temperature:
-40° ~ +105°C
- Contact Material:
BRASS
- Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0
Color: Black
- Finish:
Gold, Tin or Duplex plated
Standard: Gold flash all over
Duplex plated:
Gold plated on contact area
Tin on solder area

RoHS Compliance

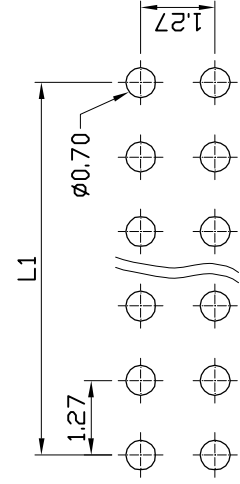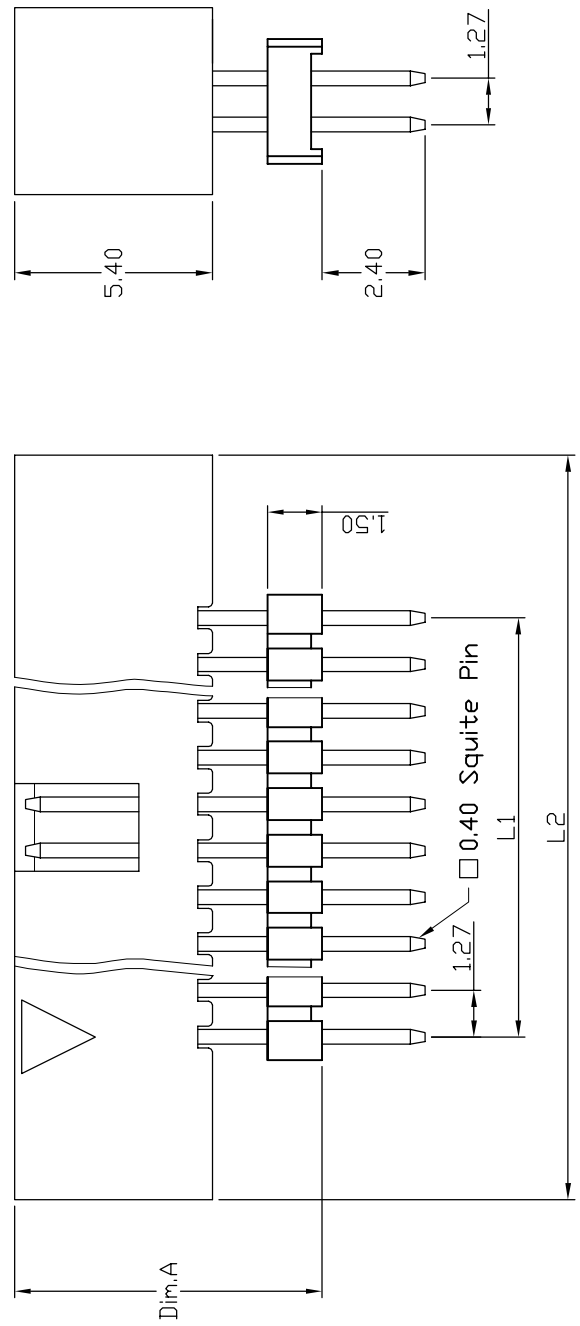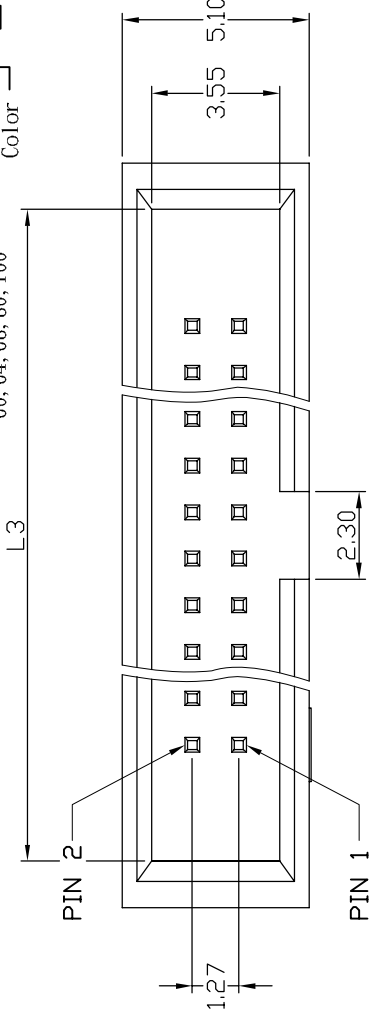

Ref.

| 成品規格圖 | | APP. | ANGLES | ±3° | SIZE | A4 |
|---------|---------------------------------|---------|--------|-----------|-------|-----|
| TITLE | 1.27mm Box Header Straight Type | CHK. | LINEAR | 0.0 ±0.38 | SCALE | 3:1 |
| PART NO | 23X6740-XXS22X-XXX-A-01 | | | 0.00±0.25 | SHEET | 1/1 |
| DRW NO | | DR. | KEN | | | |
| UNIT | mm(INCH) | PROJECT | ◎ | | | |
| | 5 | | | | | |
| | 6 | | | | | |
| | 7 | | | | | |
| | 8 | | | | | |



RECOMMENDED P. C. B. LAYOUT