

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

Ordering information:
23X6746-XXD00X-XXX

B PBT
 N Nylon-6T

Number of Contact
 20, 26, 30, 34, 40, 50,
 60, 68, 80, 100

G Gold Plated
 T Tin Plated
 H Duplex Plated

Contact Plating
 01 Normal
 10 10 μ"

Color

Cir- cuits	Dimension mm	
	L1	L2
2X10	11.43	20.46
2X13	15.24	24.30
2X15	17.78	26.88
2X17	20.32	29.42
2X20	24.13	33.30
2X25	30.48	39.62
2X30	36.83	45.98
2X34	41.91	51.10
2X40	49.53	58.75
2X50	62.23	71.48

SPECIFICATIONS

Current Rating:
 1 Amp

Insulator resistance:
 1000 Megohms Min.
 Contact resistance:
 20 m ohms Max.


Dielectric withstanding:
 AC 500V/minute
 Operating Temperature:
 -40° ~ +105° C

Contact Material:
 BRASS



Insulator Material:
 High Temperature Thermoplastic
 +Glass Fibre UL94V-0
 Color: Black

Finish:
 Gold, Tin or Duplex plated
 Standard: Gold flash all over
 Duplex plated:
 Gold plated on contact area
 Tin on solder area

RoHS Compliance

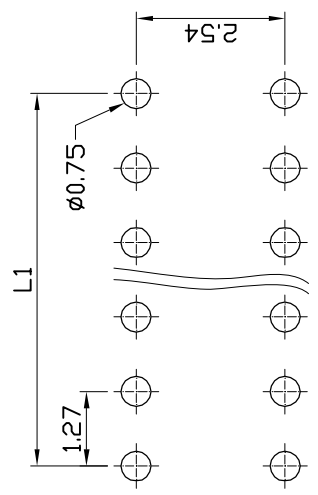

□ 0.46 Squite Pin

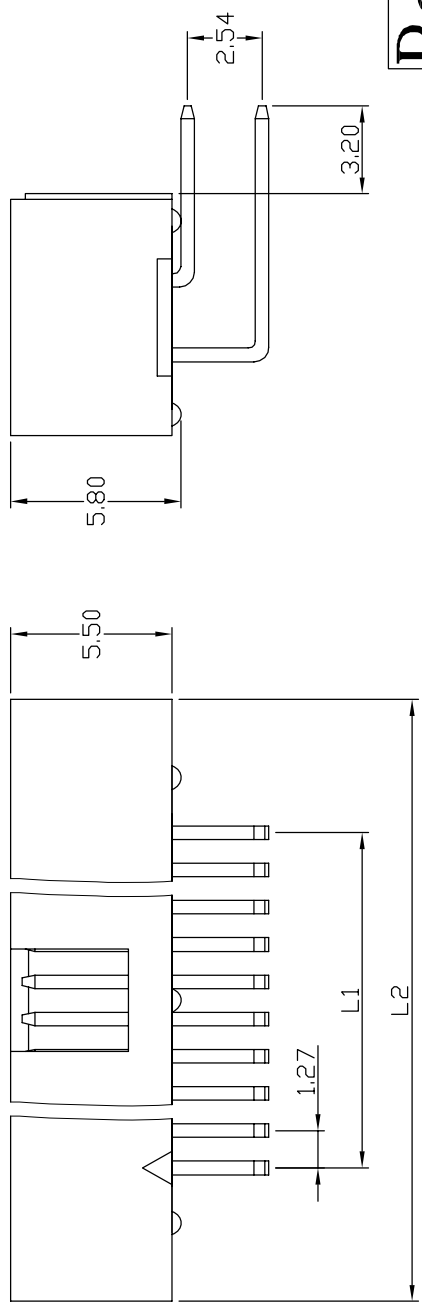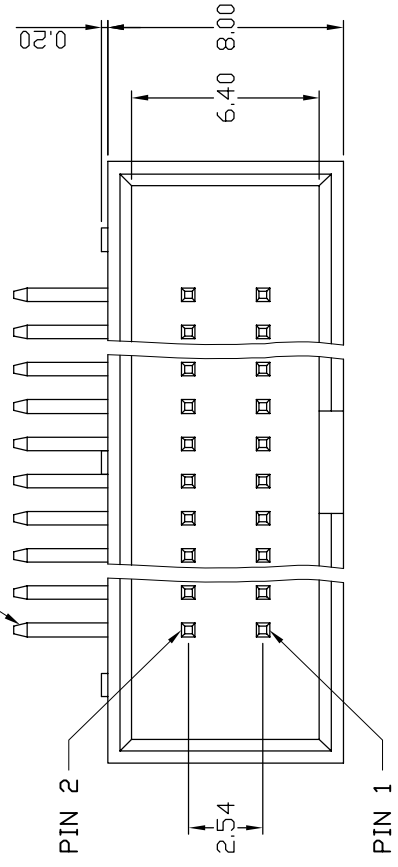

Ref.

成品規格圖		APP.	ANGLES	±3°	SIZE	A4
TITLE	1.27X2.54mm Box Header Right Angle Type	CHK.	LINEAR	0.0	±0.38	3:1
PART NO	23X6746-XXD00X-XXX			0.00±0.25		1/1
DRW NO		DR.	KEN			
UNIT	mm(INCH)	PROJECT	◎			
	5					
	6					
	7					
	8					



RECOMMENDED P. C. B. LAYOUT