

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

### SPECIFICATIONS

Current Rating:

1 Amp

Insulator resistance:

1000 Megohms Min.

Contact resistance:

20 m ohms Max.

Dielectric withstanding:

AC 500V/minute

Operating Temperature:

-40° ~ +105°C

Contact Material:

BRASS

Insulator Material:

High Temperature Thermoplastic

+Glass Fibre UL94V-0

Color: Black

Finish:

Gold, Tin or Duplex plated


Standard: Gold flash all over

Duplex plated:

Gold plated on contact area

Tin on solder area

**RoHS Compliance**

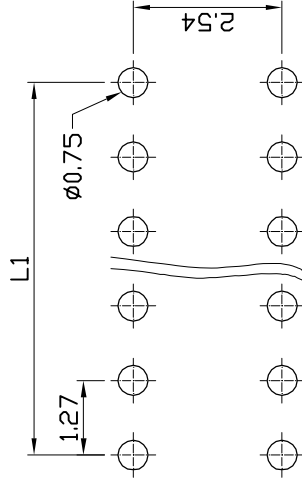

RECOMMENDED P. C. B. LAYOUT

### Ordering information:

23X6746-XXDXXAX-XXX

B PBT  
N Nylon-6T

□ 0.46 Squire Pin

G Gold Plated  
T Tin Plated  
H Duplex Plated

Contact Plating

01 Normal

10 10 μ"

: :

: :

: :

Color

Dimension

50 = 5.00mm



65 = 6.50mm

XX = X.XXmm

Number of Contact

20, 26, 30, 34, 40, 50,

60, 68, 80, 100

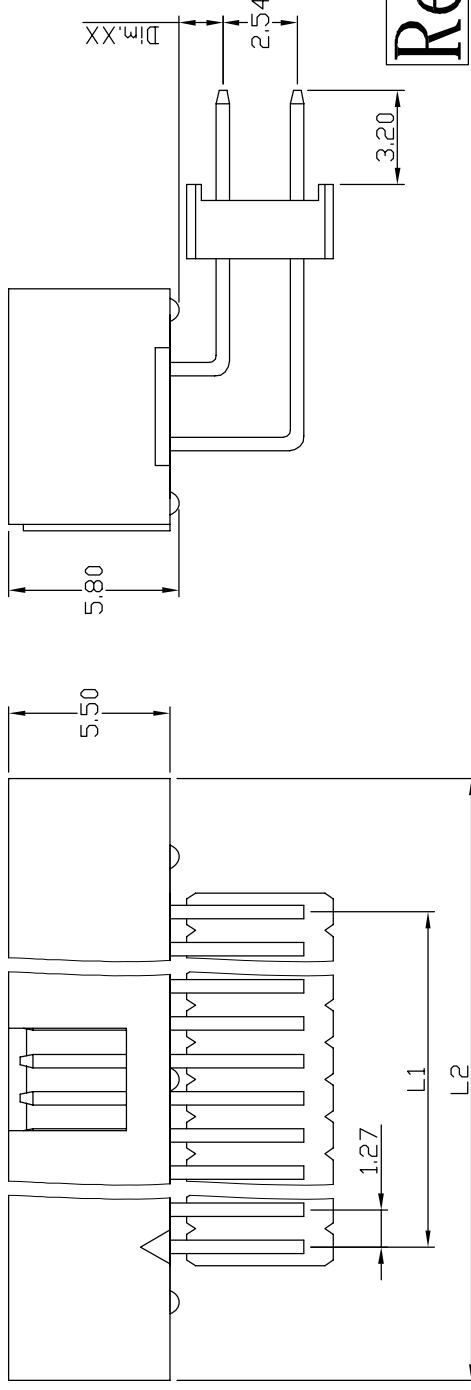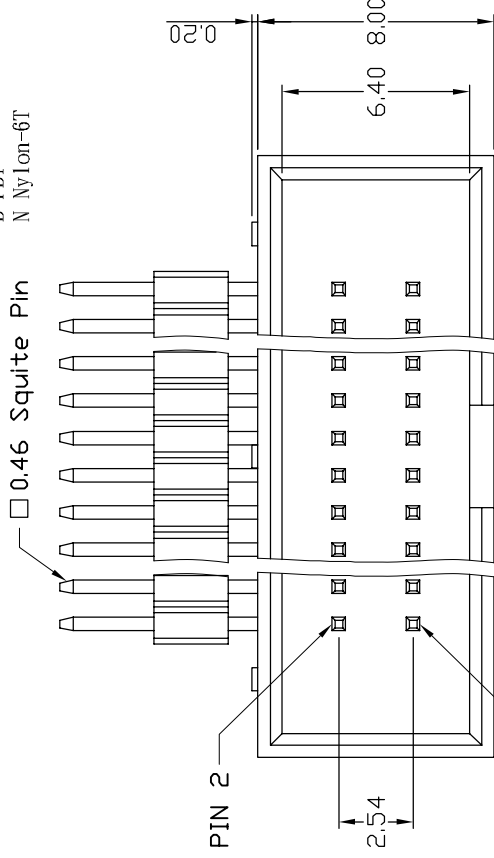

Ref.

### 成品規格圖

TITLE	1.27X2.54mm Box Header Right Angle Type	CHK.	APP.	ANGLES	±3°	SIZE	A4
PART NO	23X6746-XXDXXAX-XXX			LINEAR	0.0 ±0.38	SCALE	3:1
DRW NO					0.00±0.25	SHEET	1/1
UNIT	mm(INCH)	PROJECT	DR. KEN				
			96.01.04				

