


1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

**SPECIFICATIONS**



Current Rating:  
 1 Amp  
 Insulator resistance:  
 1000 Megohms Min.  
 Contact resistance:  
 20 m ohms Max.  
 Dielectric withstanding:  
 AC 500V/minute  
 Operating Temperature:  
 -40° ~ +105° C  
 Contact Material:  
 BRASS  
 Insulator Material:  
 High Temperature Thermoplastic  
 +Glass Fibre UL94V-0  
 Color: Black  
 Finish:  
 Gold, Tin or Duplex plated  
 Standard: Gold flash all over  
 Duplex plated:  
 Gold plated on contact area  
 Tin on solder area

**RoHS Compliance**

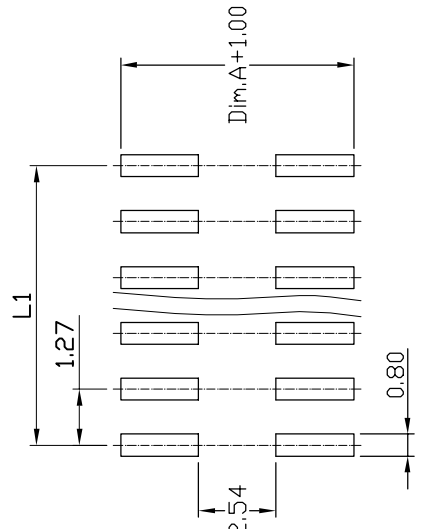

**Ordering information:**  
 23X6746-XXM00X-XXX-A

B PBT  
 N Nylon-6T  
 Number of Contact  
 20, 26, 30, 34, 40, 50,  
 60, 68, 80, 100  
 Color  
 Dimension Standard 8.40mm  
 G Gold Plated  
 T Tin Plated  
 H Duplex Plated  
 Contact Plating  
 01 Normal  
 10 10 μ"

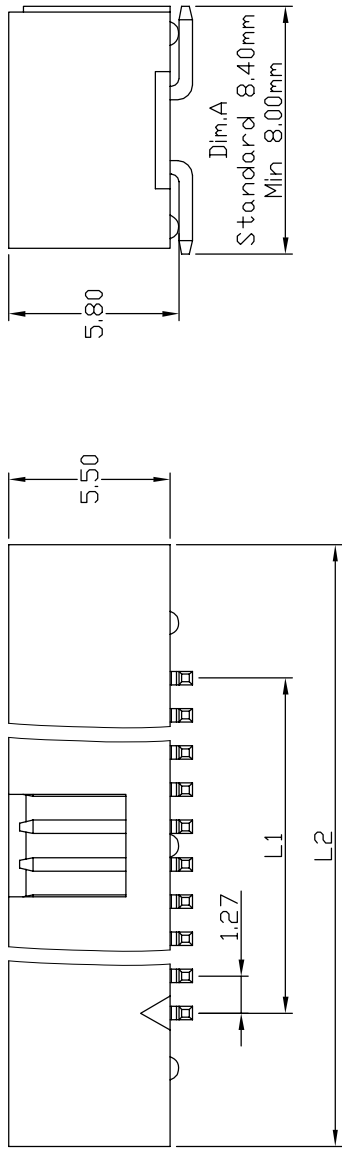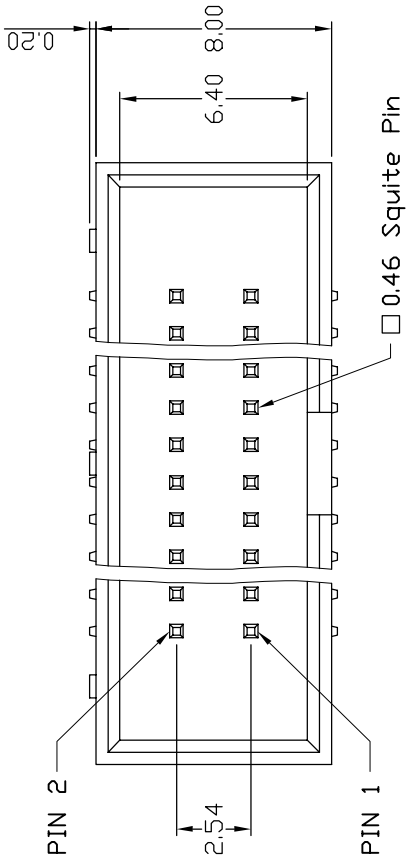

**Ref.**

TITLE		APP.	ANGLES	±3°	SIZE	A4
1.27X2.54mm Box Header SMT Type		CHK.	LINEAR	0.0	±0.38	3:1
PART NO 23X6746-XXM00X-XXX-A				0.00±0.25		1/1
DRW NO		DR.	KEN			
UNIT	mm(INCH)	PROJECT	96.01.04			



RECOMMENDED P. C. B. LAYOUT

1 2 3 4 5 6 7 8