

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS
 Current Rating:
 1 Amp
 Insulator resistance:
 1000 Megohms Min.
 Contact resistance:
 20 m ohms Max.
 Dielectric withstanding:
 AC 500V/minute
 Operating Temperature:
 -40° ~ +105° C
 Contact Material:
 BRASS
 Insulator Material:
 High Temperature Thermoplastic
 +Glass Fibre UL94V-0
 Color: Black
 Finish:
 Gold, Tin or Duplex plated
 Standard: Gold flash all over
 Duplex plated:
 Gold plated on contact area
 Tin on solder area

Ordering information:
 23X6746-XXM00AX-XXX-A

B PBT
 N Nylon-6T

Number of Contact
 20, 26, 30, 34, 40, 50,
 60, 68, 80, 100





Dimension
 Standard 8.40mm

G Gold Plated
 T Tin Plated
 H Duplex Plated

Contact Plating
 01 Normal
 10 10 μ"

Color

Cir-cuits	Dimension mm
2X10	L1 11.43
2X13	L2 20.46
2X15	L1 15.24
2X17	L2 24.30
2X20	L1 17.78
2X25	L2 26.88
2X30	L1 20.32
2X34	L2 29.42
2X40	L1 24.13
2X50	L2 33.30
	L1 30.48
	L2 39.62
	L1 45.98
	L2 51.10
	L1 58.75
	L2 71.48

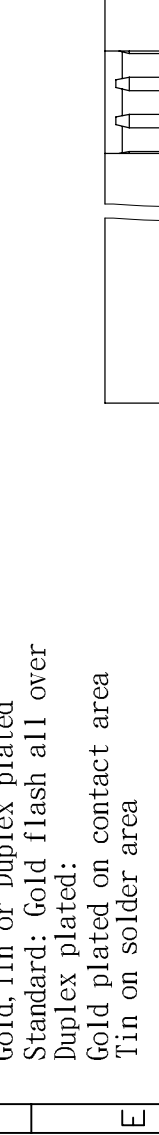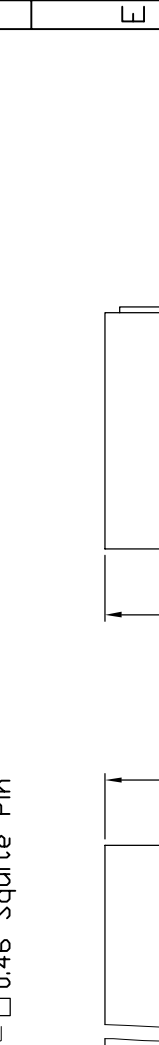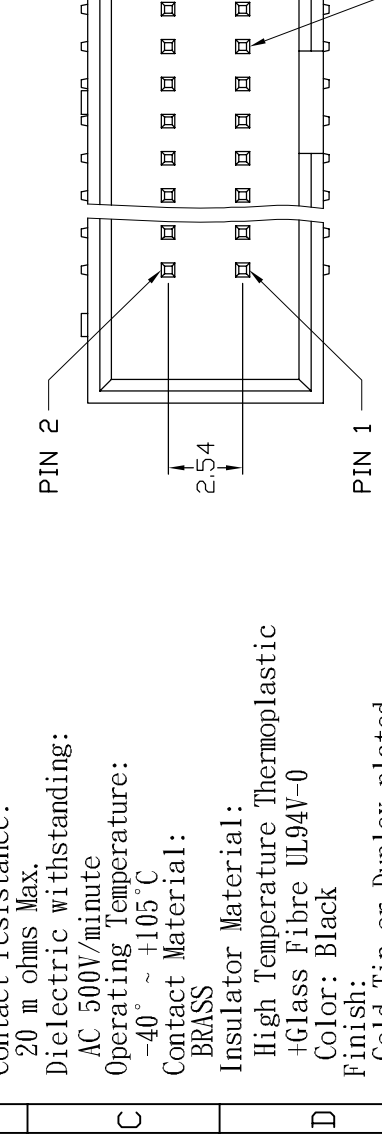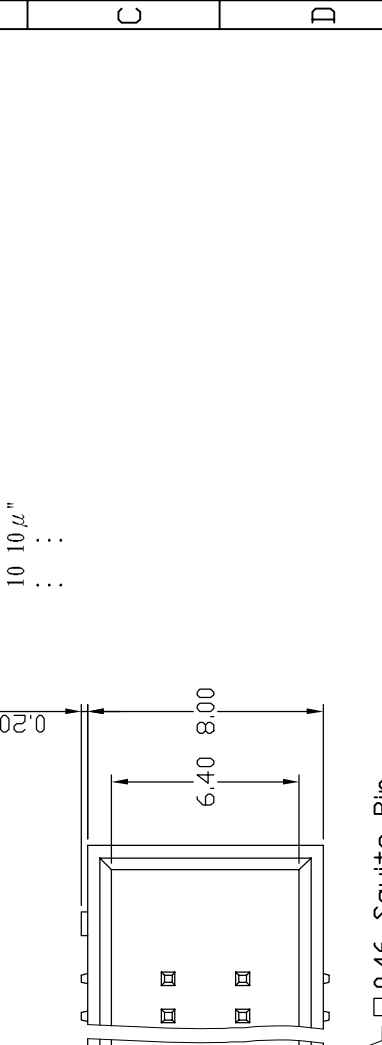

RoHS Compliance



Ref.

ANGLES	±3°	SIZE	A4
LINEAR	0.0 ±0.38	SCALE	3:1
	0.00±0.25	SHEET	1/1

TITLE	1.27X2.54mm Box Header SMT Type	CHK.
PART NO	23X6746-XXM00AX-XXX-A	
DRW NO		
UNIT	mm(INCH)	PROJECT
		DR. KEN
		96.01.04

APP.	成品規格圖