REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Current Rating:
1 Amp
Insulator resistance:
1000 Megohms Min.
Contact resistance:
20 m ohms Max.
Dielectric withstanding:
AC 500V/minute
Operating Temperature:
-40° ~ +105°C
Contact Material:
BRASS
Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0
Color: Black
Finish:
Gold, Tin or Duplex plated
Standard: Gold flash all over
Duplex plated:
Gold plated on contact area
Tin on solder area

RoHS Compliance

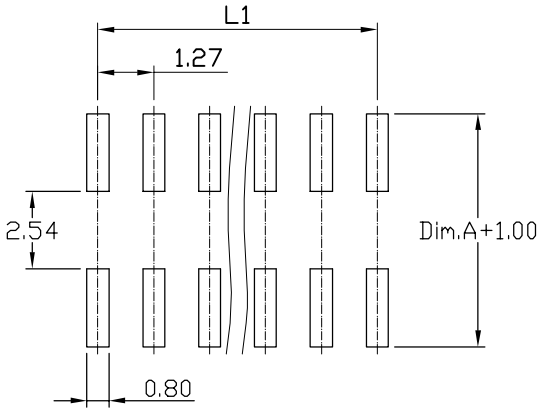

RECOMMENDED P.C.B. LAYOUT

Ordering infomation:
23X6746-XXMXXX-XXX-A

- B PBT / N Nylon-6T
- Number of Contact: 20, 26, 30, 34, 40, 50, 60, 68, 80, 100
- Dimension: 10 = 1.00mm, 15 = 1.50mm, XX = X.XXmm
- Color
- Contact Plating: 01 Normal, 10 10μ"
- G Gold Plated, T Tin Plated, H Duplex Plated
- Dimension: Standard 8.40mm

Cir-cuits	Dimension mm L1	L2
2X10	11.43	20.46
2X13	15.24	24.30
2X15	17.78	26.88
2X17	20.32	29.42
2X20	24.13	33.30
2X25	30.48	39.62
2X30	36.83	45.98
2X34	41.91	51.10
2X40	49.53	58.75
2X50	62.23	71.48

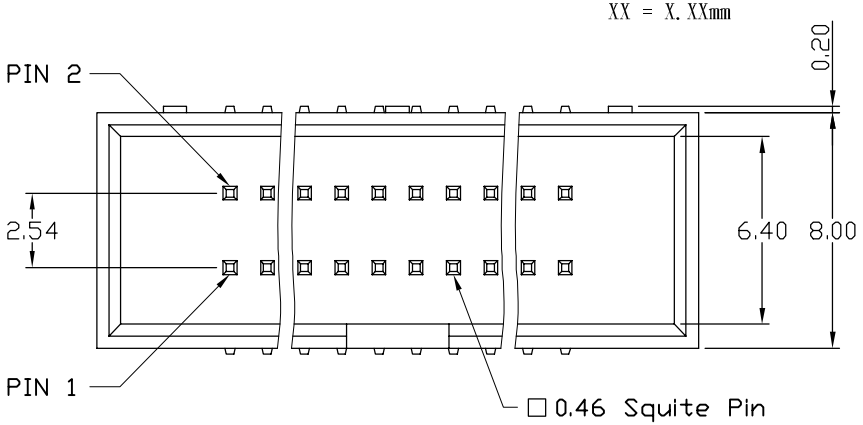

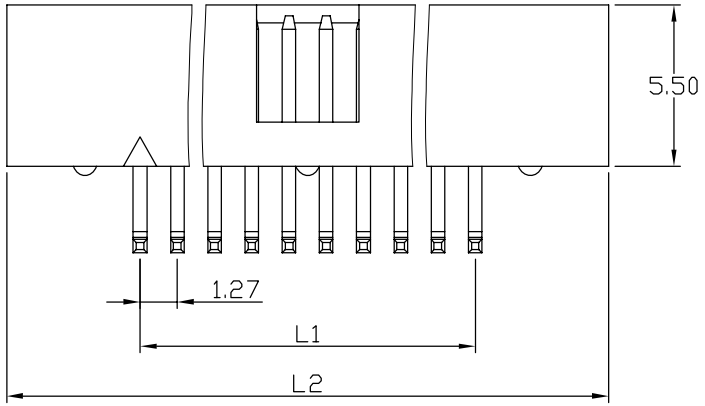

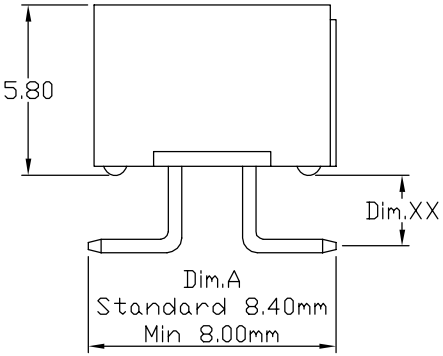

Ref.

成品規格圖		APP.		ANGLES	±3°	SIZE	A4
				LINEAR	0.0 ±0.38	SCALE	3:1
TITLE	1.27X2.54mm Box Header SMT Type	CHK.			0.00±0.25	SHEET	1/1
PART NO	23X6746-XXMXXX-XXX-A						
DRW NO		DR.	KEN				
UNIT	mm(INCH)	PROJECT			96.01.04		

JVE GLOBAL