


1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Current Rating:
 1 Amp
Insulator resistance:
 1000 Megohms Min.
Contact resistance:
 20 m ohms Max.
Dielectric withstanding:
 AC 500V/minute
 Operating Temperature:
 -40° ~ +105° C
Contact Material:
 BRASS
Insulator Material:
 High Temperature Thermoplastic
 +Glass Fibre UL94V-0
 Color: Black
Finish:
 Gold, Tin or Duplex plated
 Standard: Gold flash all over
 Duplex plated:
 Gold plated on contact area
 Tin on solder area



RoHS Compliance

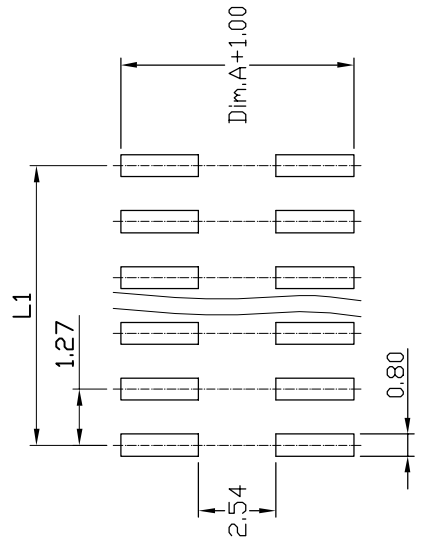

Ordering information:

23X6746-XXMXXAX-XXX-A

B PBT
N Nylon-6T
Dimension
 50 = 5.00mm
 65 = 6.50mm
 XY = X. XYmm
Color
 : :
 : :
 : :
Number of Contact
 20, 26, 30, 34, 40, 50,
 60, 68, 80, 100
Dimension
 Standard 8.40mm
G Gold Plated
T Tin Plated
H Duplex Plated
Contact Plating
 01 Normal
 10 10 μ"

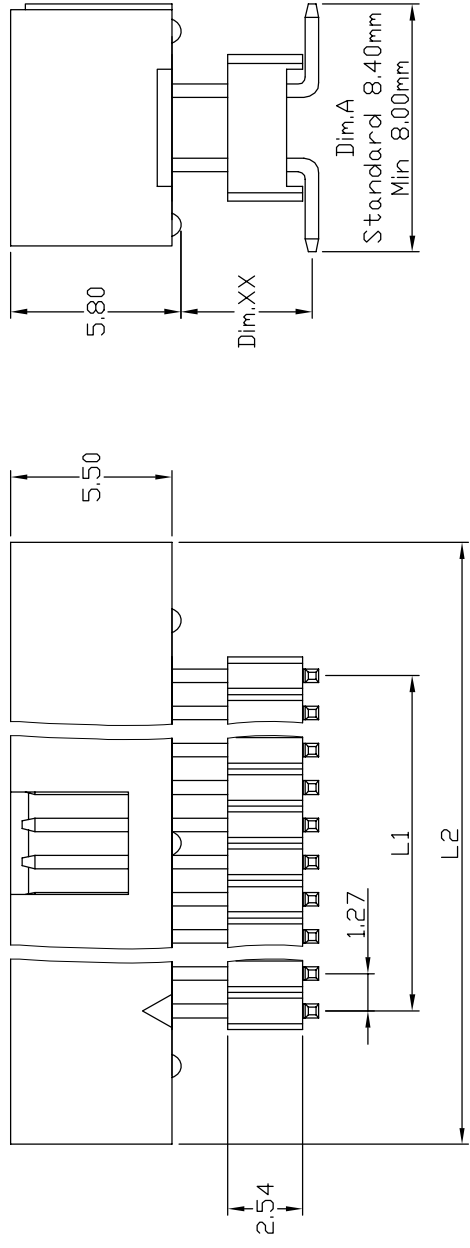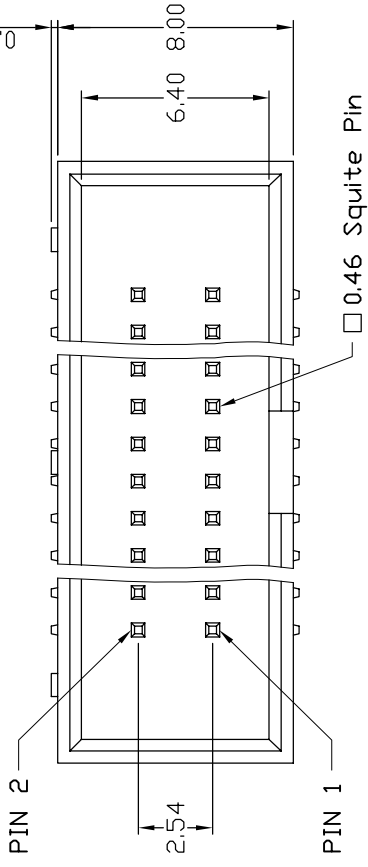

Ref.

成品規格圖		APP.	ANGLES	±3°	SIZE	A4
TITLE	1.27X2.54mm Box Header SMT Type	CHK.	LINEAR	0.0 ±0.38	SCALE	3:1
PART NO	23X6746-XXMXXAX-XXX-A			0.00±0.25	SHEET	1/1
DRW NO		DR.	KEN			
UNIT	mm(INCH)	PROJECT	◎			
						96.01.04



RECOMMENDED P. C. B. LAYOUT

1 2 3 4 5 6 7 8