

1 2 3 4 5 6 7 8




REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

**SPECIFICATIONS**

Current Rating:  
 1 Amp  
 Insulator resistance:  
 1000 Megohms Min.  
 Contact resistance:  
 20 m ohms Max.  
 Dielectric withstanding:  
 AC 500V/minute  
 Operating Temperature:  
 -40° ~ +105° C  
 Contact Material:  
 BRASS  
 Insulator Material:  
 High Temperature Thermoplastic  
 +Glass Fibre UL94V-0  
 Color: Black  
 Finish:  
 Gold, Tin or Duplex plated  
 Standard: Gold flash all over  
 Duplex plated:  
 Gold plated on contact area  
 Tin on solder area


**Ordering information:**  
 23X6746-XXRXXAX-XXX

B PBT  
 N Nylon-6T  
 G Gold Plated  
 T Tin Plated  
 H Duplex Plated  
 Contact Plating  
 01 Normal  
 10 10 μ"  
 : :  
 : :  
 Color  
 Dimension  
 50 = 5.00mm  
 65 = 6.50mm  
 XX = X.XXmm  
 Number of Contact  
 20, 26, 30, 34, 40, 50,  
 60, 68, 80, 100

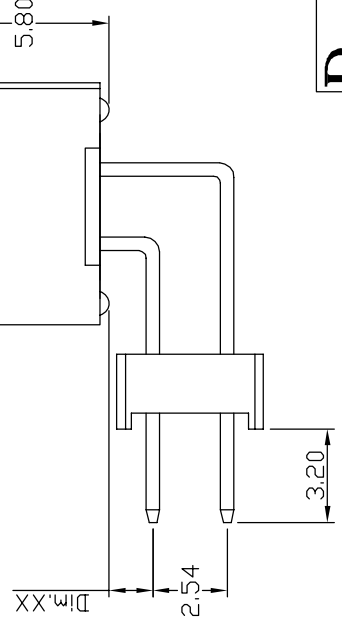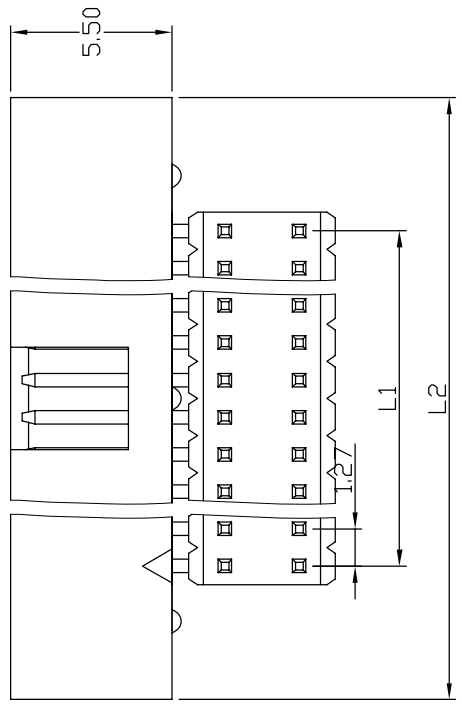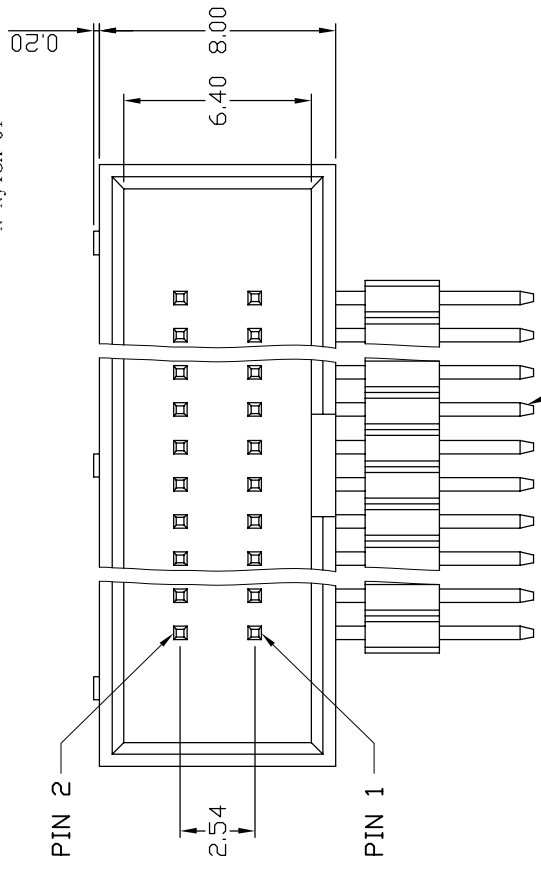

**Ref.**

**RoHS Compliance**

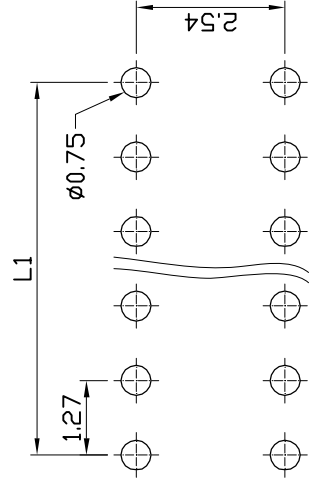

**成品規格圖**

TITLE	1.27X2.54mm Box Header Right Angle Type	CHK.		APP.		ANGLES	±3°	SIZE	A4
PART NO	23X6746-XXRXXAX-XXX					LINEAR	0.0 ±0.38	SCALE	3:1
DRW NO							0.00±0.25	SHEET	1/1
UNIT	mm(INCH)	PROJECT	◎	DR.	KEN				
									96.01.04



RECOMMENDED P. C. B. LAYOUT

1 2 3 4 5 6 7 8