


REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Current Rating:
 1 Amp
 Insulator resistance:
 1000 Megohms Min.
 Contact resistance:
 20 m ohms Max.
 Dielectric withstanding:
 AC 500V/minute
 Operating Temperature:
 -40° ~ +105°C
 Contact Material:
 BRASS
 Insulator Material:
 High Temperature Thermoplastic
 +Glass Fibre UL94V-0
 Color: Black
 Finish:
 Gold, Tin or Duplex plated
 Standard: Gold flash all over
 Duplex plated:
 Gold plated on contact area
 Tin on solder area



RoHS Compliance

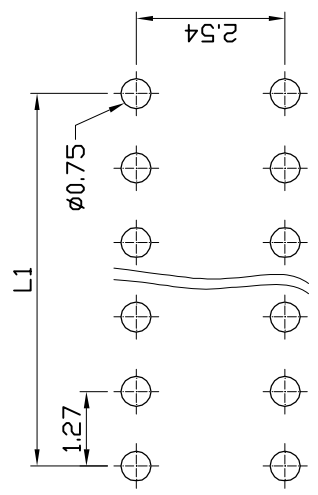

RECOMMENDED P. C. B. LAYOUT

Ordering information:
 23X6746-XXS10X-XXX

B PBT
 N Nylon-6T
 Number of Contact
 20, 26, 30, 34, 40, 50,
 60, 68, 80, 100
 Color
 G Gold Plated
 T Tin Plated
 H Duplex Plated
 Contact Plating
 01 Normal
 10 10 μ"
 : :
 : :

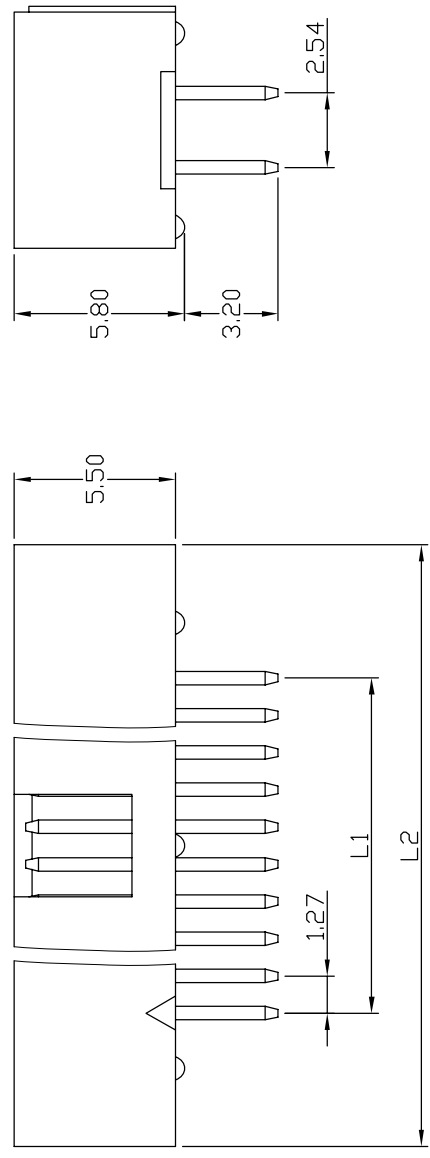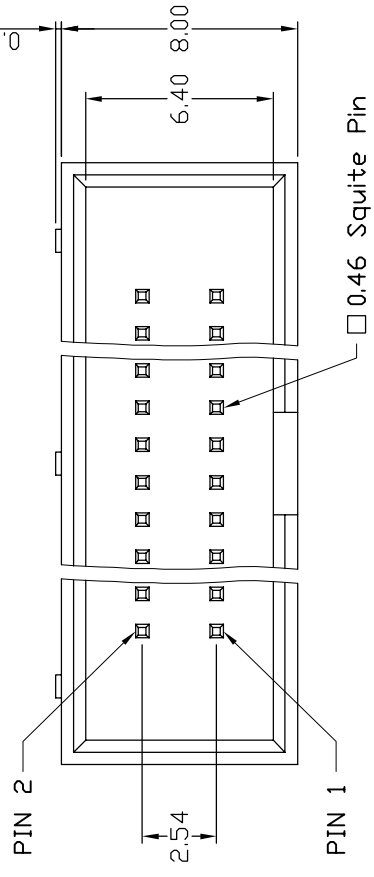

Ref.

APP.		ANGLES	±3°	SIZE	A4
成品規格圖		LINEAR	0.0 ±0.38	SCALE	3:1
TITLE 1.27X2.54mm Box Header Straight Type			0.00±0.25	SHEET	1/1
PART NO 23X6746-XXS10X-XXX					
DRW NO	DR.	KEN			
UNIT mm(INCH)	PROJECT	◎			
5	6	7		8	



96.01.04