

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Current Rating:
1 Amp

Insulator resistance:
1000 Megohms Min.
Contact resistance:
20 m ohms Max.


Dielectric withstanding:
AC 500V/minute
Operating Temperature:
-40° ~ +105°C

Contact Material:
BRASS

Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0
Color: Black

Finish:
Gold, Tin or Duplex plated
Standard: Gold flash all over
Duplex plated:
Gold plated on contact area
Tin on solder area

RoHS Compliance

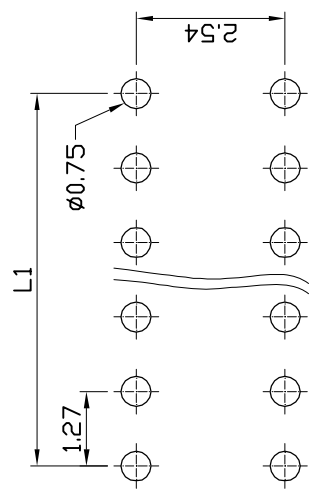

RECOMMENDED P. C. B. LAYOUT

Ordering information:

23X6746-XXS11X-XXX



B PBT
N Nylon-6T

Number of Contact
20, 26, 30, 34, 40, 50,
60, 68, 80, 100

Color

G Gold Plated
T Tin Plated
H Duplex Plated

Contact Plating
01 Normal
10 10 μ"

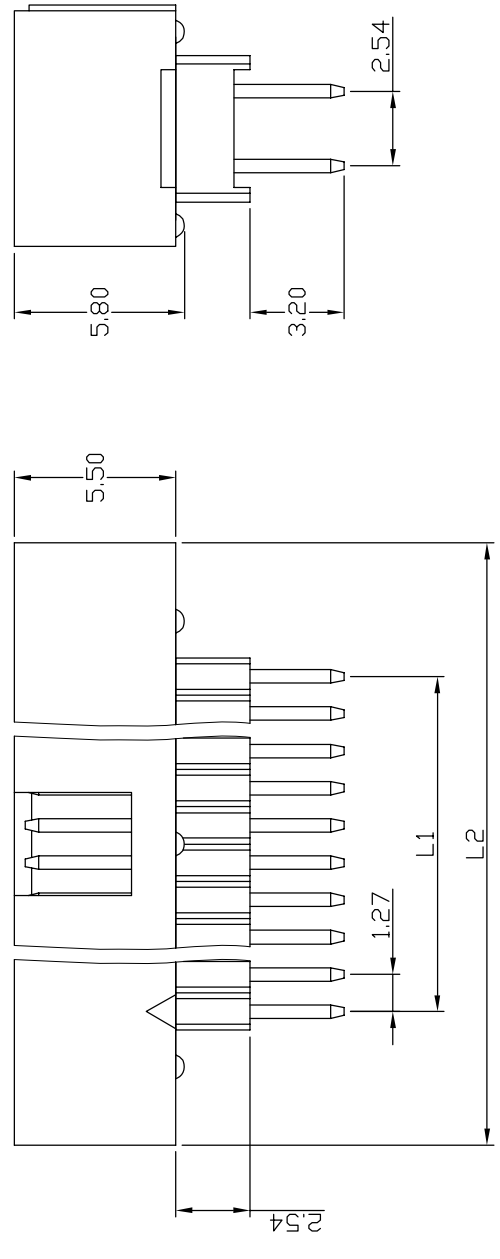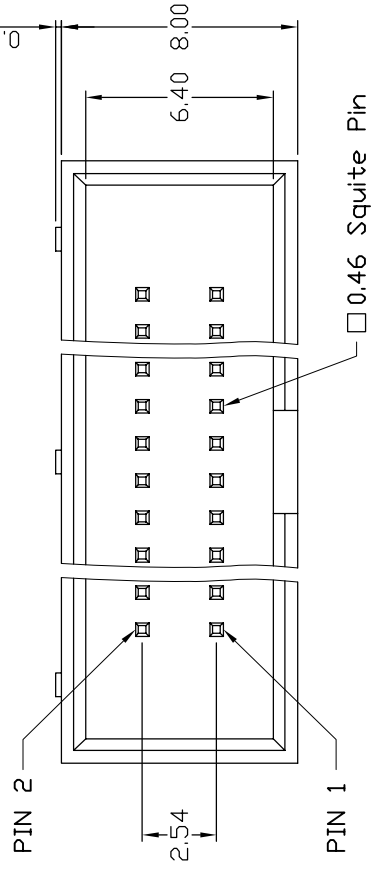

Ref.

成品規格圖		APP.	ANGLES	±3°	SIZE	A4
TITLE	1.27X2.54mm Box Header Straight Type	CHK.	LINEAR	0.0 ±0.38	SCALE	3:1
PART NO	23X6746-XXS11X-XXX			0.00±0.25	SHEET	1/1
DRW NO		DR.	KEN			
UNIT	mm(INCH)	PROJECT	96.01.04			

