REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

Ordering infomation:

23N6850-XXDXXAX-XXX

- N Nylon-6T
- No. of Contact: 06, 08, 10, 12, 14, 16, 20, 24, 26, 30, 34, 40, 44, 50, 68,
- Dimension: 10 = 1.00mm, 15 = 1.50mm, XX = X.XXmm
- Color
- Contact Plating: 01 Normal, 10 10μ"
- G Gold Plated, T Tin Plated, H Duplex Plated

Cir-cuits	Dimension mm L1	L2
2x3	4.00	13.20
2x4	6.00	15.20
2x5	8.00	17.20
2x6	10.00	19.20
2x7	12.00	21.20
2x8	14.00	23.20
2x10	18.00	27.20
2x12	22.00	31.20
2x13	24.00	33.20
2x15	28.00	37.20
2x17	32.00	41.20
2x20	38.00	47.20
2x22	42.00	51.20
2x25	48.00	57.20
2x34	66.00	75.20

SPECIFICATIONS

Current Rating:
1 Amp
Insulator resistance:
1000 Megohms Min.
Contact resistance:
25 m ohms Max.
Dielectric withstanding:
AC 500V/minute
Operating Temperature:
-40° ~ +105°C
Contact Material:
Brass
Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0
Color: Black
Finish:
Gold, Tin or Duplex plated
Standard: Gold flash all over
Duplex plated:
Gold plated on contact area
Tin on solder area

RoHS Compliance

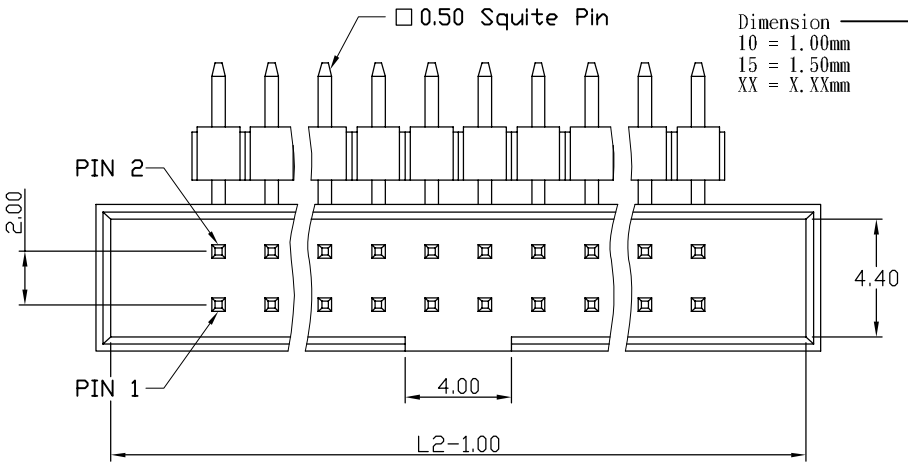

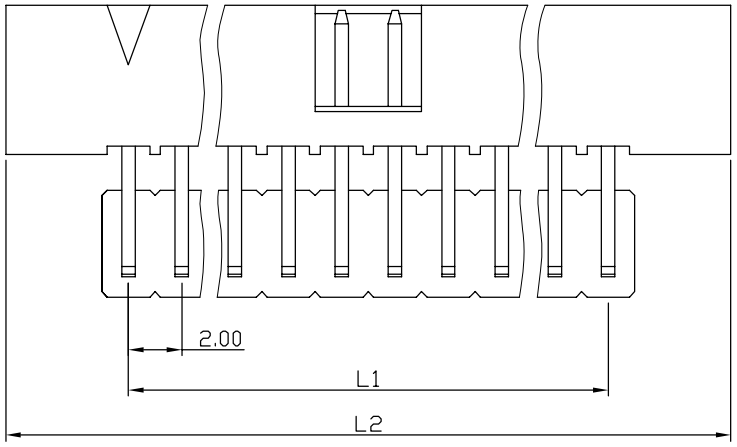

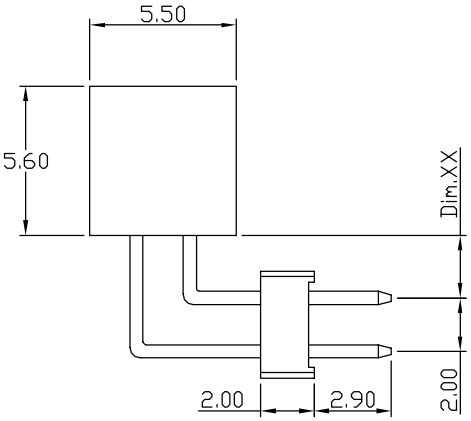

Ref.

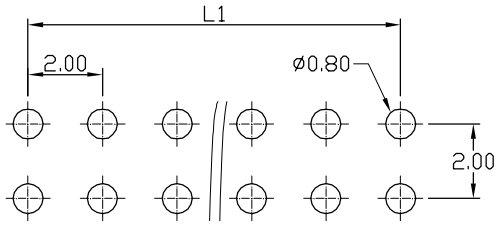

RECOMMENDED P.C.B. LAYOUT

成品規格圖		APP.		ANGLES	±3° SIZE A4
TITLE	2.00mm Box Header Right Angle Type	CHK.		LINEAR	0.0 ±0.38 SCALE 3:1
PART NO	23N6850-XXDXXAX-XXX				0.00±0.25 SHEET 1/1
DRW NO		DR.	KEN		
UNIT	mm(INCH) PROJECT		96.01.04		

JVE GLOBAL