

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Current Rating:
1 Amp

Insulator resistance:
1000 Megohms Min.

Contact resistance:
25 m ohms Max.

Dielectric withstanding:
AC 500V/minute

Operating Temperature:
-40° ~ +105°C


Contact Material:
Brass

Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0

Color: Black

Finish:
Gold, Tin or Duplex plated
Standard: Gold flash all over
Duplex plated:
Gold plated on contact area
Tin on solder area

RoHS Compliance

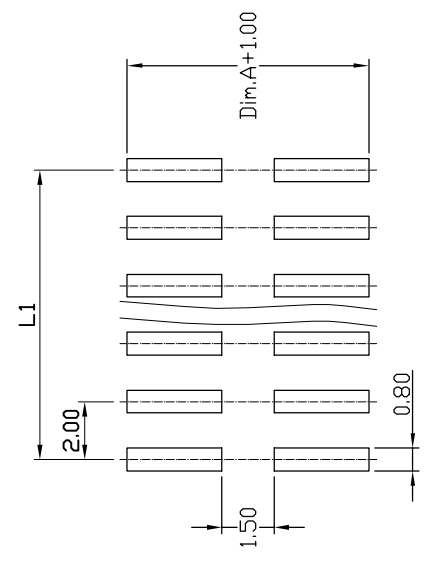

RECOMMENDED P. C. B. LAYOUT

Ordering information:

23N6850-XXMXXAX-XXX-A

N Nylon-6T

No. of Contact
06, 08, 10, 12, 14,
16, 20, 24, 26, 30,
34, 40, 44, 50, 68,



Dimension
50 = 5.00mm
65 = 6.50mm
XX = X.XXmm

Color

Dimension Standard 7.50mm

G Gold Plated
T Tin Plated
H Duplex Plated

Contact Plating
01 Normal
10 10 μ"

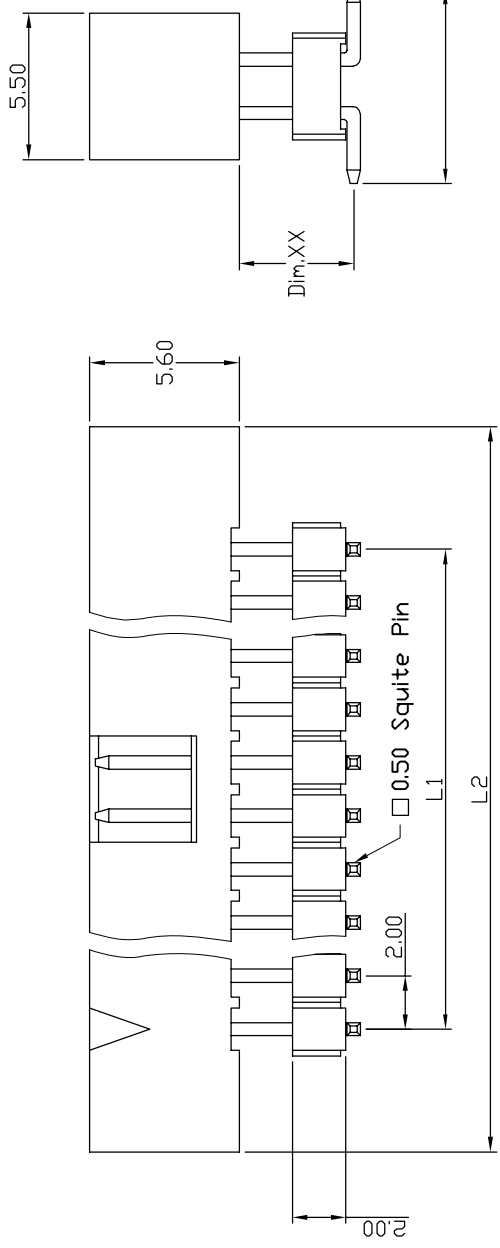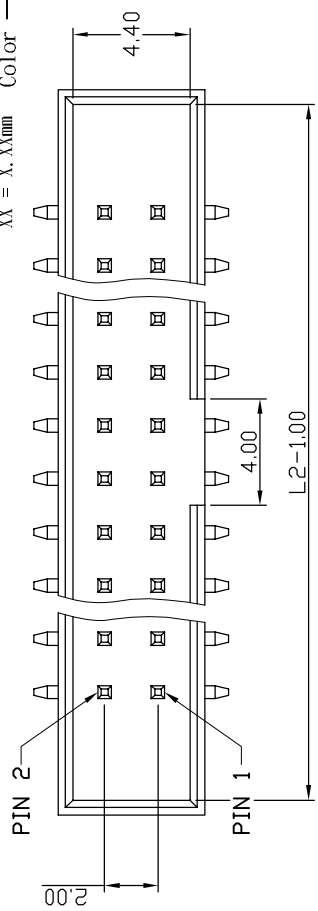

Ref.

成品規格圖		APP.	ANGLES	±3°	SIZE	A4
TITLE 2.00mm Box Header SMT Type		CHK.	LINEAR	0.0	±0.38	SCALE 3:1
PART NO 23N6850-XXMXXAX-XXX-A				0.00	±0.25	SHEET 1/1
DRW NO		DR.	KEN		96.01.04	
UNIT	mm(INCH)	PROJECT	◎		5 6 7 8	

