

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				


SPECIFICATIONS	Current Rating:	1 Amp
	Insulator resistance:	1000 Megohms Min.
	Contact resistance:	25 m ohms Max.
	Dielectric withstanding:	AC 500V/minute
	Operating Temperature:	-40° ~ +105°C
	Contact Material:	Brass
	Insulator Material:	High Temperature Thermoplastic +Glass Fibre UL94V-0
	Color:	Black
	Finish:	Gold, Tin or Duplex plated
	Standard:	Gold flash all over Duplex plated: Gold plated on contact area Tin on solder area

Ordering information:
23N6850-XXRXXAX-XXX

N Nylon-6T
 No. of Contact
 06, 08, 10, 12, 14,
 16, 20, 24, 26, 30,
 34, 40, 44, 50, 68,

Dimension
 10 = 1.00mm
 15 = 1.50mm
 XX = Y.XXmm

Color
 G Gold Plated
 T Tin Plated
 H Duplex Plated
 Contact Plating
 01 Normal
 10 10 μ"

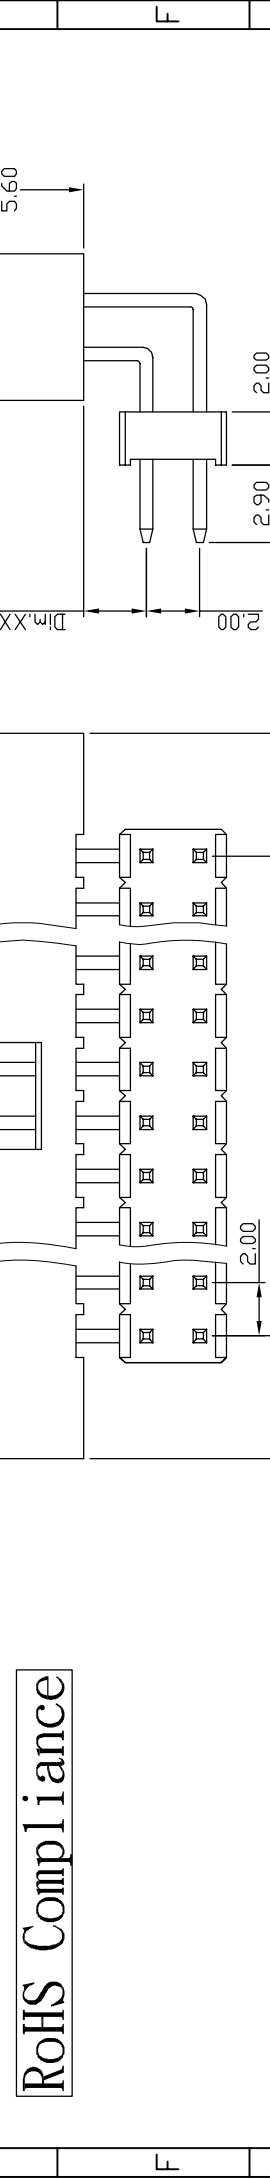

RoHS Compliance

成品規格圖

TITLE 2.00mm Box Header Right Angle Type CHK.

PART NO 23N6850-XXRXXAX-XXX

DRW NO

UNIT mm(INCH) PROJECT DR. KEN 96.01.04

APP.

ANGLES	±3°	SIZE	A4
LINEAR	0.0 ±0.38	SCALE	3:1
	0.00±0.25	SHEET	1/1