

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Current Rating:
1 Amp

Insulator resistance:
1000 Megohms Min.

Contact resistance:
25 m ohms Max.

Dielectric withstanding:
AC 500V/minute

Operating Temperature:
-40° ~ +105°C

Contact Material:
Brass

Insulator Material:

High Temperature Thermoplastic

+Glass Fibre UL94V-0

Color: Black

Finish:

Gold, Tin or Duplex plated

Standard: Gold flash all over

Duplex plated:

Gold plated on contact area

Tin on solder area

RoHS Compliance

No. of Contact
06, 08, 10, 12, 14,
16, 20, 24, 26, 30,
34, 40, 44, 50, 68,

N Nylon-6T

Ordering information:

23N6850-XXS22X-XXX-A




Dimension

G Gold Plated
T Tin Plated
H Duplex Plated

Contact Plating

01 Normal
10 10 μ"

Color

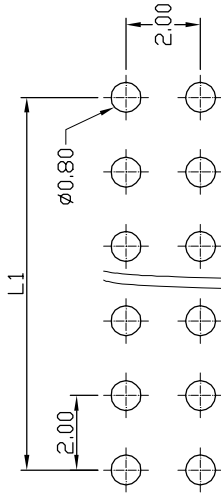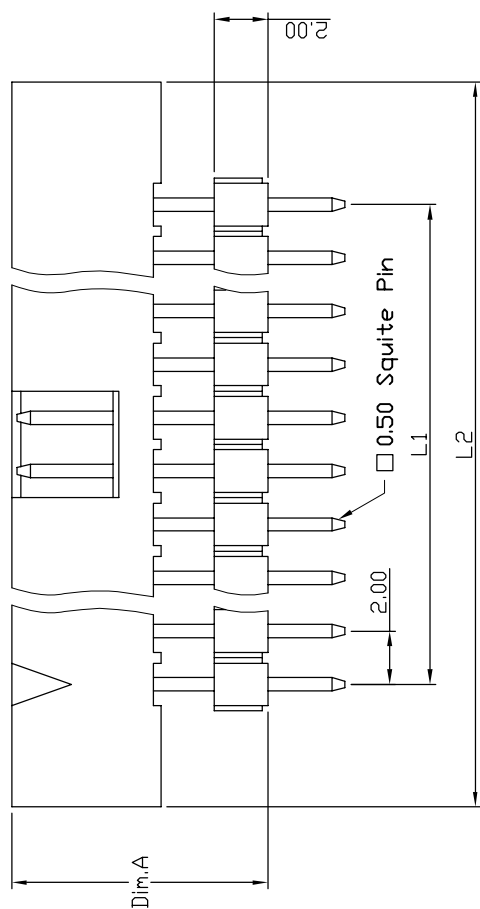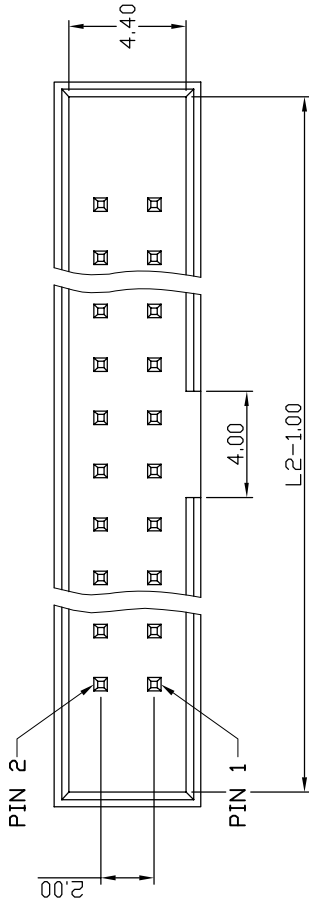

Ref.

TITLE		APP.	ANGLES	±3°	SIZE
2.00mm Box Header Straight Type			LINEAR	0.0	A4
PART NO 23N6850-XXS22X-XXX-A		CHK.		±0.38	SCALE
DRW NO				0.00±0.25	3:1
UNIT mm(INCH)		PROJECT			SHEET
96.01.04		DR.			1/1
KEN					



RECOMMENDED P. C. B. LAYOUT