

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Current Rating:
3 Amp

Insulator resistance:
5000 Megohms Min.

Contact resistance:
20 m ohms Max.

Dielectric withstanding:
AC 1000V/minute

Operating Temperature:
-40° ~ +105°C


Contact Material:
BRASS

Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0

Color: Black

Finish:
Gold, Tin or Duplex plated
Standard: Gold flash all over
Duplex plated:
Gold plated on contact area
Tin on solder area

RoHS Compliance

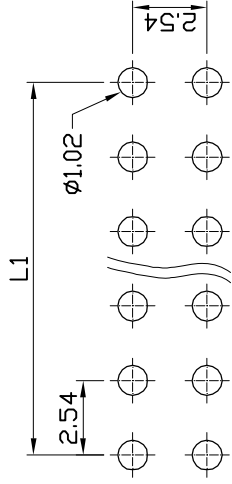

RECOMMENDED P. C. B. LAYOUT

Ordering information:

23X6960-XXDXXX-XXX

B PBT
N Nylon-6T
L LCP




Number of Contact
06, 08, 10, 12, 14,
16, 20, 24, 26, 30,
34, 40, 50, 60, 64.

Dimension
10 = 1.00mm
15 = 1.50mm
XX = X.XXmm

Color

G Gold Plated
T Tin Plated
H Duplex Plated

Contact Plating
01 Normal
10 10 μ"

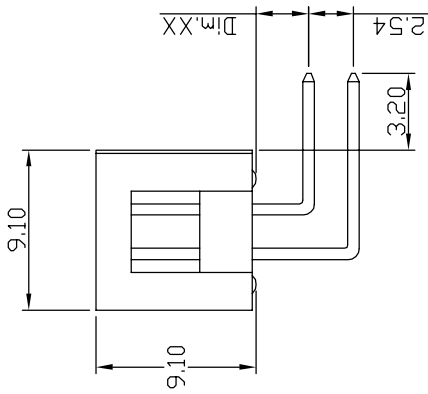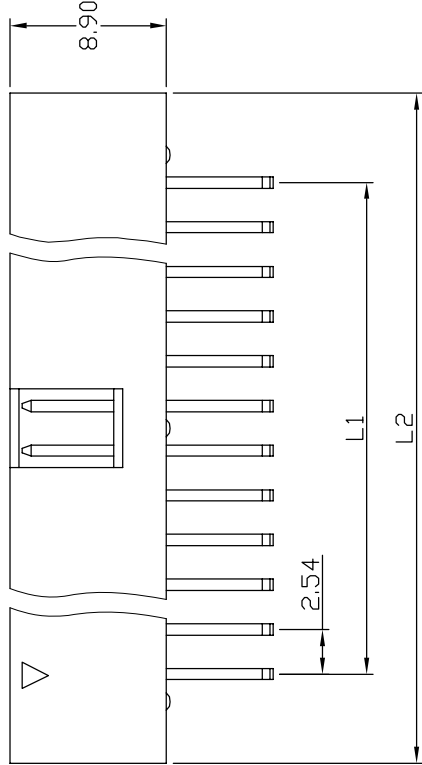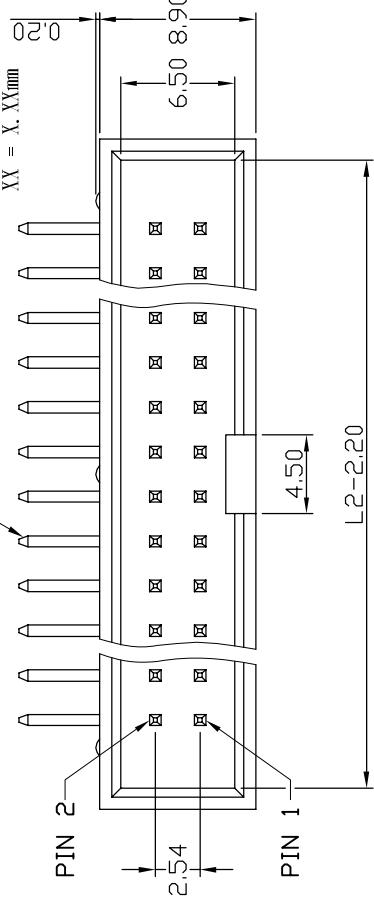

Ref.

Cir- cuits	Dimension mm	
	L1	L2
2X3	5.08	15.24
2X4	7.62	17.78
2X5	10.16	20.32
2X6	12.70	22.86
2X7	15.24	25.40
2X8	17.78	27.94
2X10	22.86	33.02
2X12	27.94	38.10
2X13	30.48	40.64
2X15	35.56	45.72
2X17	40.64	50.80
2X20	48.26	58.42
2X25	60.96	71.12
2X30	73.66	83.82
2X32	78.74	88.90

成品規格圖		APP.	ANGLES	±3°	SIZE	A4
TITLE 2.54mm Box Header Right Angle Type		CHK.	LINEAR	0.0 ±0.38	SCALE	3:1
PART NO 23X6960-XXDXXX-XXX				0.00±0.25	SHEET	1/1
DRW NO		DR.	KEN			
UNIT	mm(INCH)	PROJECT	96.01.04			

