


REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

**SPECIFICATIONS**

Current Rating:  
3 Amp  
Insulator resistance:  
5000 Megohms Min.  
Contact resistance:  
20 m ohms Max.  
Dielectric withstanding:  
AC 1000V/minute  
Operating Temperature:  
-40° ~ +105°C  
Contact Material:  
BRASS  
Insulator Material:  
High Temperature Thermoplastic  
+Glass Fibre UL94V-0  
Color: Black  
Finish:  
Gold, Tin or Duplex plated  
Standard: Gold flash all over  
Duplex plated:  
Gold plated on contact area  
Tin on solder area

**RoHS Compliance**

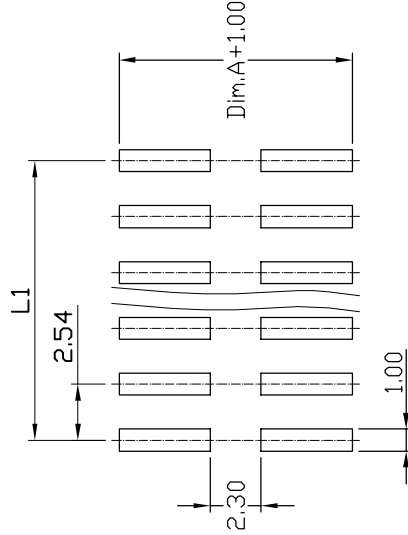

RECOMMENDED P. C. B. LAYOUT

**Ordering information:**

23X6960-XXM00X-XXX-A

N Nylon-6T  
L LCP




Number of Contact  
06, 08, 10, 12, 14,  
16, 20, 24, 26, 30,  
34, 40, 50, 60, 64.

Color

Dimension Standard 9.60mm

G Gold Plated  
T Tin Plated  
H Duplex Plated

Contact Plating  
01 Normal  
10 10 μ"

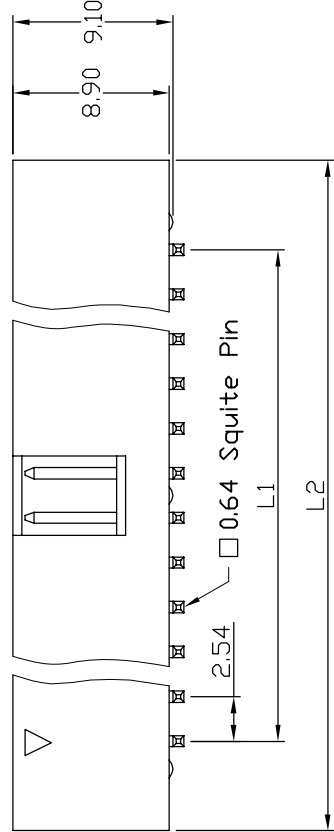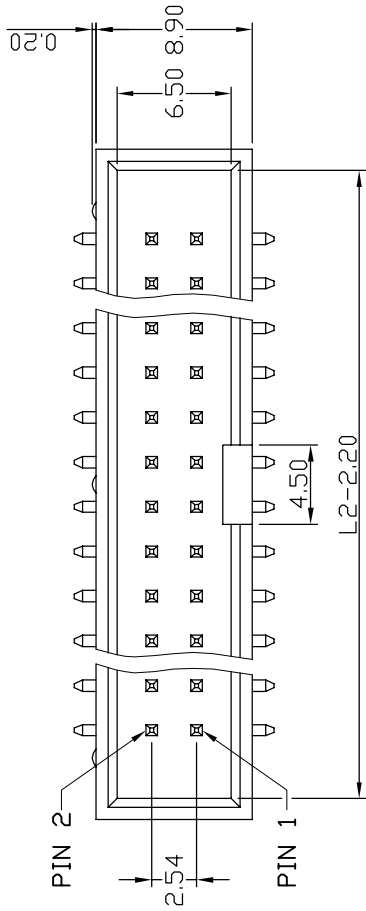

**Ref.**

成品規格圖		APP.	ANGLES	±3°	SIZE	A4
TITLE 2.54mm Box Header SMT Type		CHK.	LINEAR	0.0 ±0.38	SCALE	3:1
PART NO 23X6960-XXM00X-XXX-A				0.00±0.25	SHEET	1/1
DRW NO		DR.	KEN			
UNIT	mm(INCH)	PROJECT	96.01.04			

