


1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Current Rating:
3 Amp
Insulator resistance:
5000 Megohms Min.
Contact resistance:
20 m ohms Max.
Dielectric withstanding:
AC 1000V/minute
Operating Temperature:
-40° ~ +105°C
Contact Material:
BRASS
Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0
Color: Black
Finish:
Gold, Tin or Duplex plated
Standard: Gold flash all over
Duplex plated:
Gold plated on contact area
Tin on solder area

RoHS Compliance



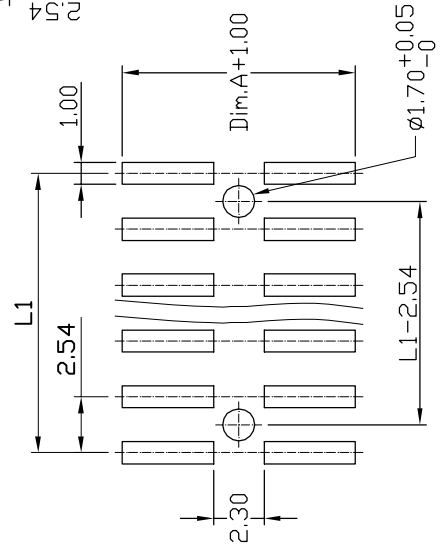


RECOMMENDED P. C. B. LAYOUT

Ordering information:

23X6960-XXM00PX-XXX-A

N Nylon-6T
L LCP
Number of Contact
06, 08, 10, 12, 14,
16, 20, 24, 26, 30,
34, 40, 50, 60, 64.
Color
Dimension Standard 9.60mm
G Gold Plated
T Tin Plated
H Duplex Plated
Contact Plating
01 Normal
10 10 μ"

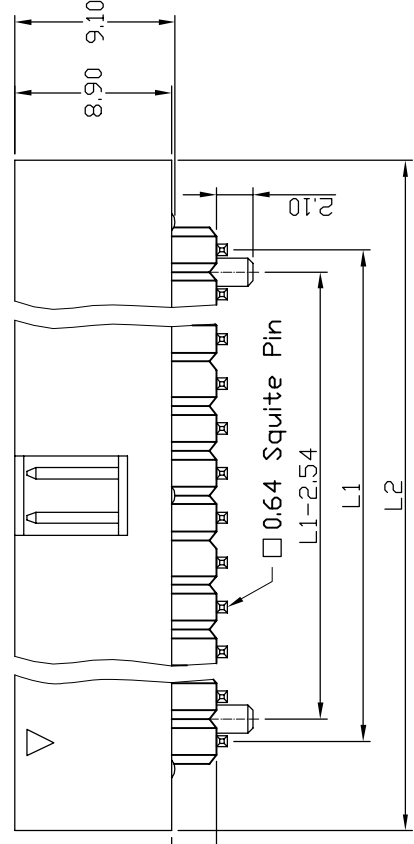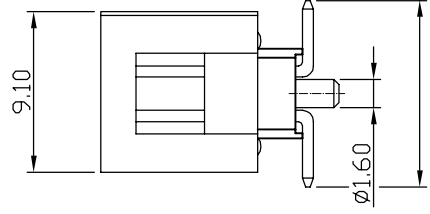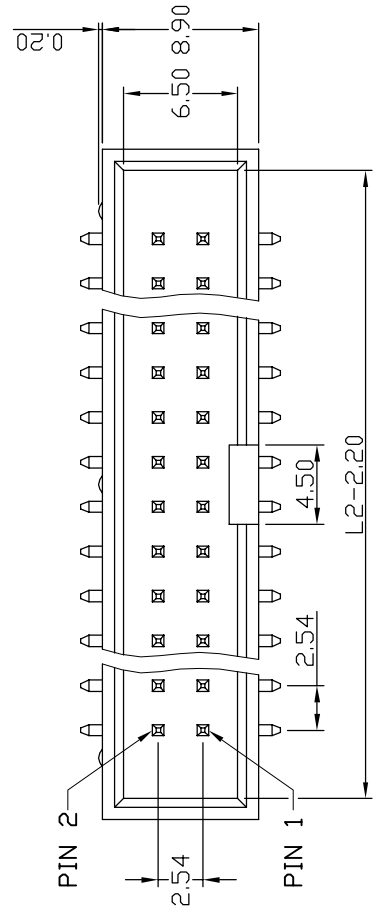

Dim.A
Standard 9.60mm
Min 8.90mm

Ref.

ANGLES	±3°	SIZE	A4
LINEAR	0.0 ±0.38	SCALE	3:1
	0.00±0.25	SHEET	1/1

成品規格圖

TITLE	APP.
2.54mm Box Header SMT Type <td></td>	
PART NO	CHK.
23X6960-XXM00PX-XXX-A	
DRW NO	DR.
	KEN
UNIT	PROJECT
mm(INCH)	96.01.04



1 2 3 4 5 6 7 8