
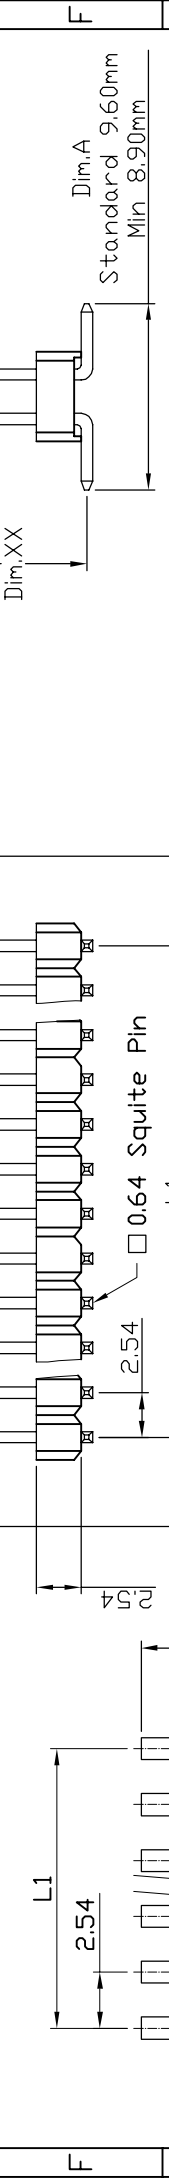
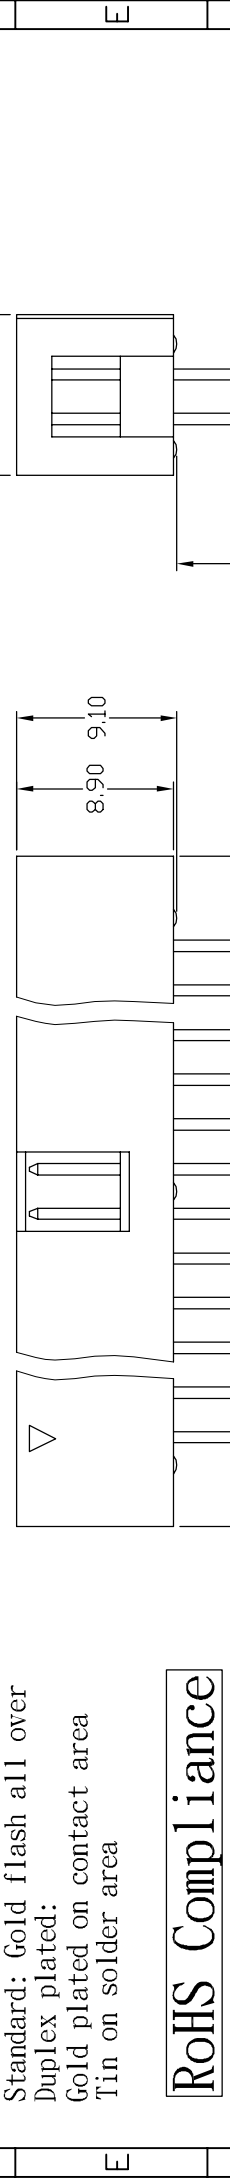


REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS
 Current Rating: 3 Amp
 Insulator resistance: 5000 Megohms Min.
 Contact resistance: 20 m ohms Max.
 Dielectric withstanding: AC 1000V/minute
 Operating Temperature: -40° ~ +105°C
 Contact Material: BRASS
 Insulator Material: High Temperature Thermoplastic +Glass Fibre UL94V-0
 Color: Black
 Finish: Gold, Tin or Duplex plated
 Standard: Gold flash all over
 Duplex plated: Gold plated on contact area
 Tin on solder area

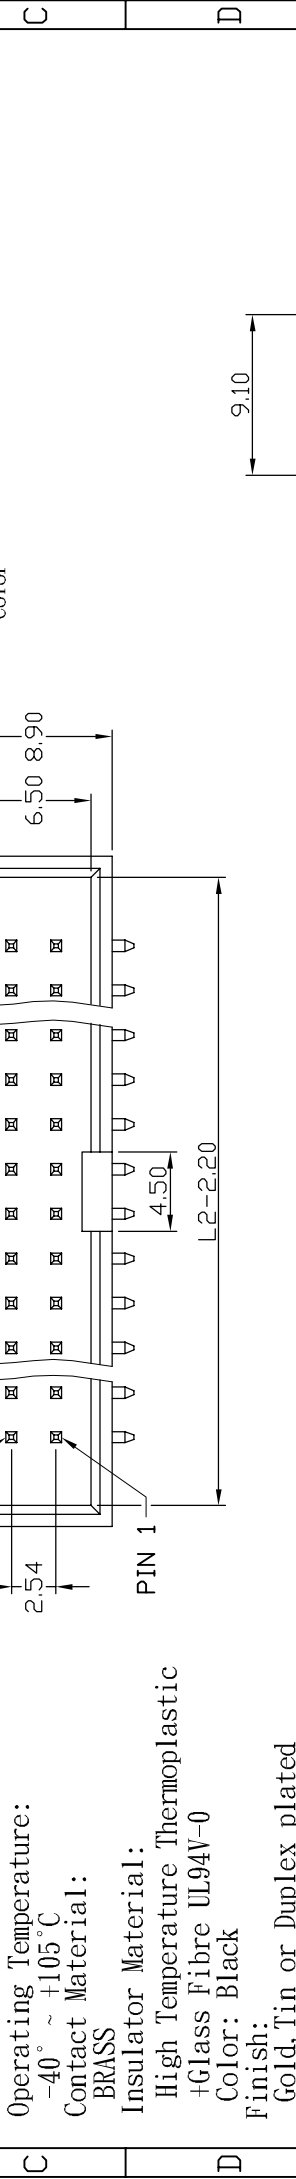

RoHS Compliance

APP.		ANGLES	±3°	SIZE	A4
TITLE		LINEAR	0.0 ±0.38	SCALE	3:1
PART NO			0.00±0.25	SHEET	1/1
DRW NO		DR.	KEN		
UNIT		mm(INCH)	PROJECT	96.01.04	



Ref.