

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

**SPECIFICATIONS**

Current Rating:  
3 Amp

Insulator resistance:  
5000 Megohms Min.

Contact resistance:  
20 m ohms Max.

Dielectric withstanding:  
AC 1000V/minute

Operating Temperature:  
-40° ~ +105°C


Contact Material:  
BRASS

Insulator Material:  
High Temperature Thermoplastic  
+Glass Fibre UL94V-0

Color: Black

Finish:  
Gold, Tin or Duplex plated  
Standard: Gold flash all over  
Duplex plated:  
Gold plated on contact area  
Tin on solder area

**RoHS Compliance**

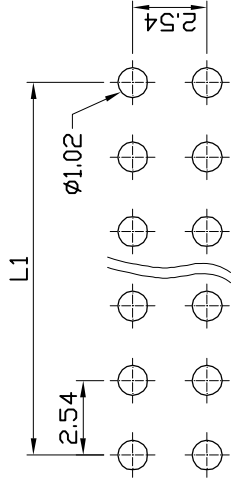

RECOMMENDED P. C. B. LAYOUT

**Ordering information:**

23X6960-XXRXXAX-XXX




B PBT  
N Nylon-6T  
L LCP

Number of Contact  
06, 08, 10, 12, 14,  
16, 20, 24, 26, 30,  
34, 40, 50, 60, 64.

G Gold Plated  
T Tin Plated  
H Duplex Plated

Contact Plating  
01 Normal  
10 10 μ"

Color

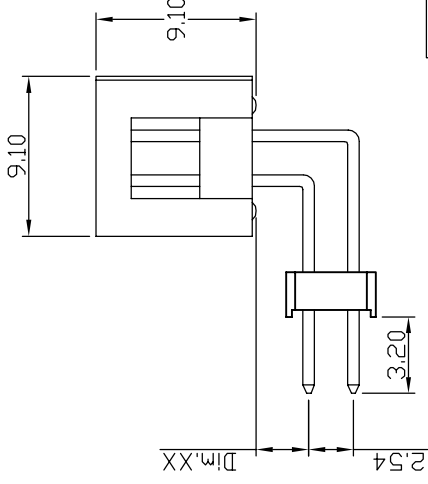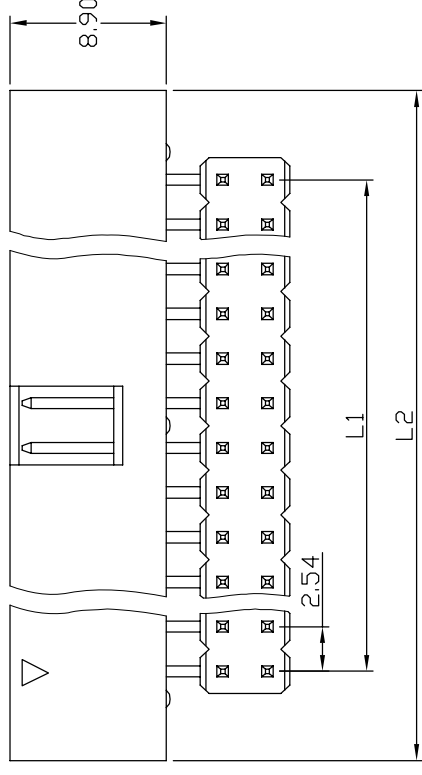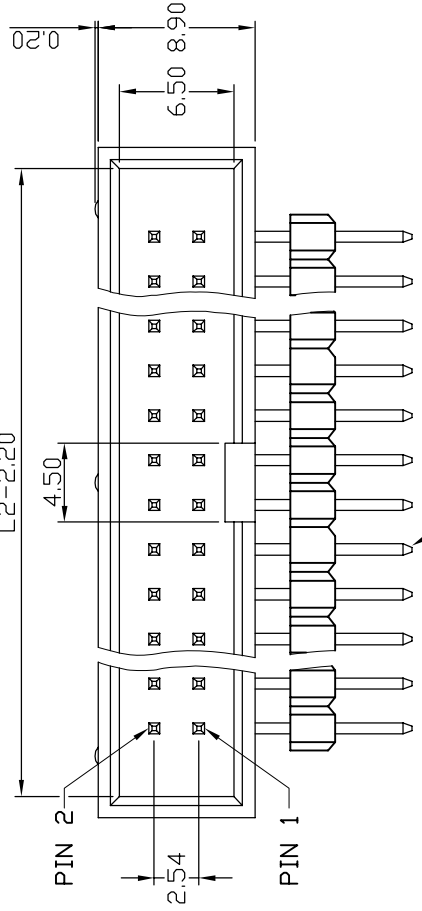

Ref.

成品規格圖		APP.	ANGLES	±3°	SIZE	A4
TITLE 2.54mm Box Header Right Angle Type		CHK.	LINEAR	0.0 ±0.38	SCALE	3:1
PART NO 23X6960-XXRXXAX-XXX				0.00±0.25	SHEET	1/1
DRW NO		DR.	KEN			
UNIT	mm(INCH)	PROJECT	96.01.04			

