

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

SPECIFICATIONS

Current Rating:
3 Amp

Insulator resistance:
5000 Megohms Min.

Contact resistance:
20 m ohms Max.

Dielectric withstanding:
AC 1000V/minute

Operating Temperature:
-40° ~ +105°C


Contact Material:
BRASS

Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0

Color: Black

Finish:
Gold, Tin or Duplex plated
Standard: Gold flash all over
Duplex plated:
Gold plated on contact area
Tin on solder area

RoHS Compliance

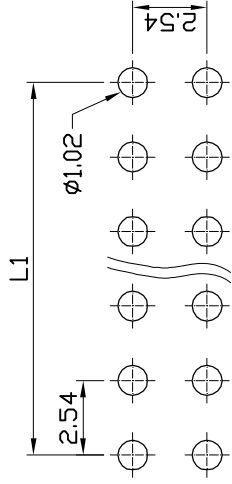

RECOMMENDED P. C. B. LAYOUT

Ordering information:
23X6960-XXS10X-XXX




B PBT
N Nylon-6T
L LCP

Number of Contact
06, 08, 10, 12, 14,
16, 20, 24, 26, 30,
34, 40, 50, 60, 64.

Color

G Gold Plated
T Tin Plated
H Duplex Plated

Contact Plating
01 Normal
10 10 μ"

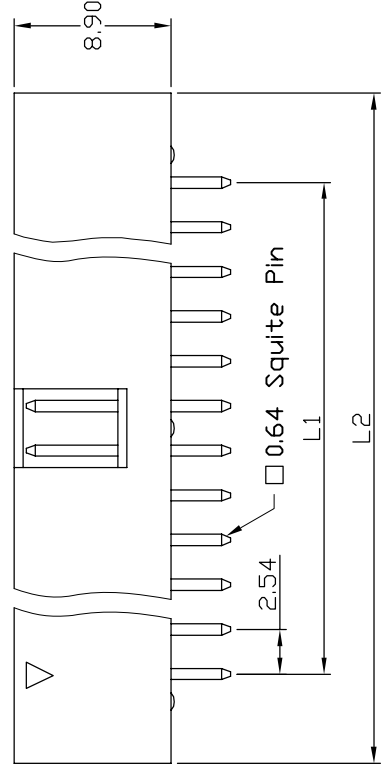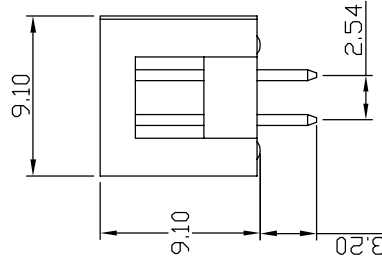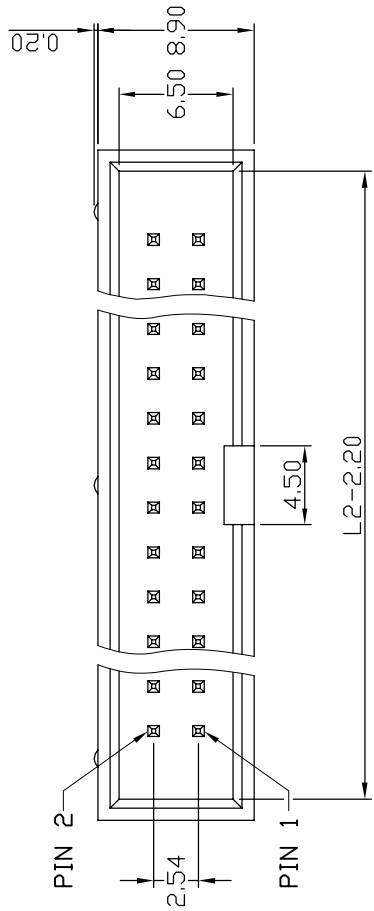

Ref.

成品規格圖		APP.	ANGLES	±3°	SIZE	A4
TITLE 2.54mm Box Header Straight Type		CHK.	LINEAR	0.0	±0.38	3:1
PART NO 23X6960-XXS10X-XXX				0.00	±0.25	1/1
DRW NO		DR.	KEN			
UNIT	mm(INCH)	PROJECT	96.01.04			



8